

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1261053

Luminaire Tested: P3AS24R309050D010 E3DLP1WH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1261053
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS24R309050D010 E3DLP1WH
Description: 3in Adjustable LED luminaire with, R30 optic, 5000K CCT AND, 90CRI , E3DLP1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2186.0 lumens
Efficiency: N/A
Efficacy: 75.9 lumens/watt
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1261053

CATALOG NUMBER: P3AS24R309050D010 E3DLP1WH

Luminous Intensity Polar Plot

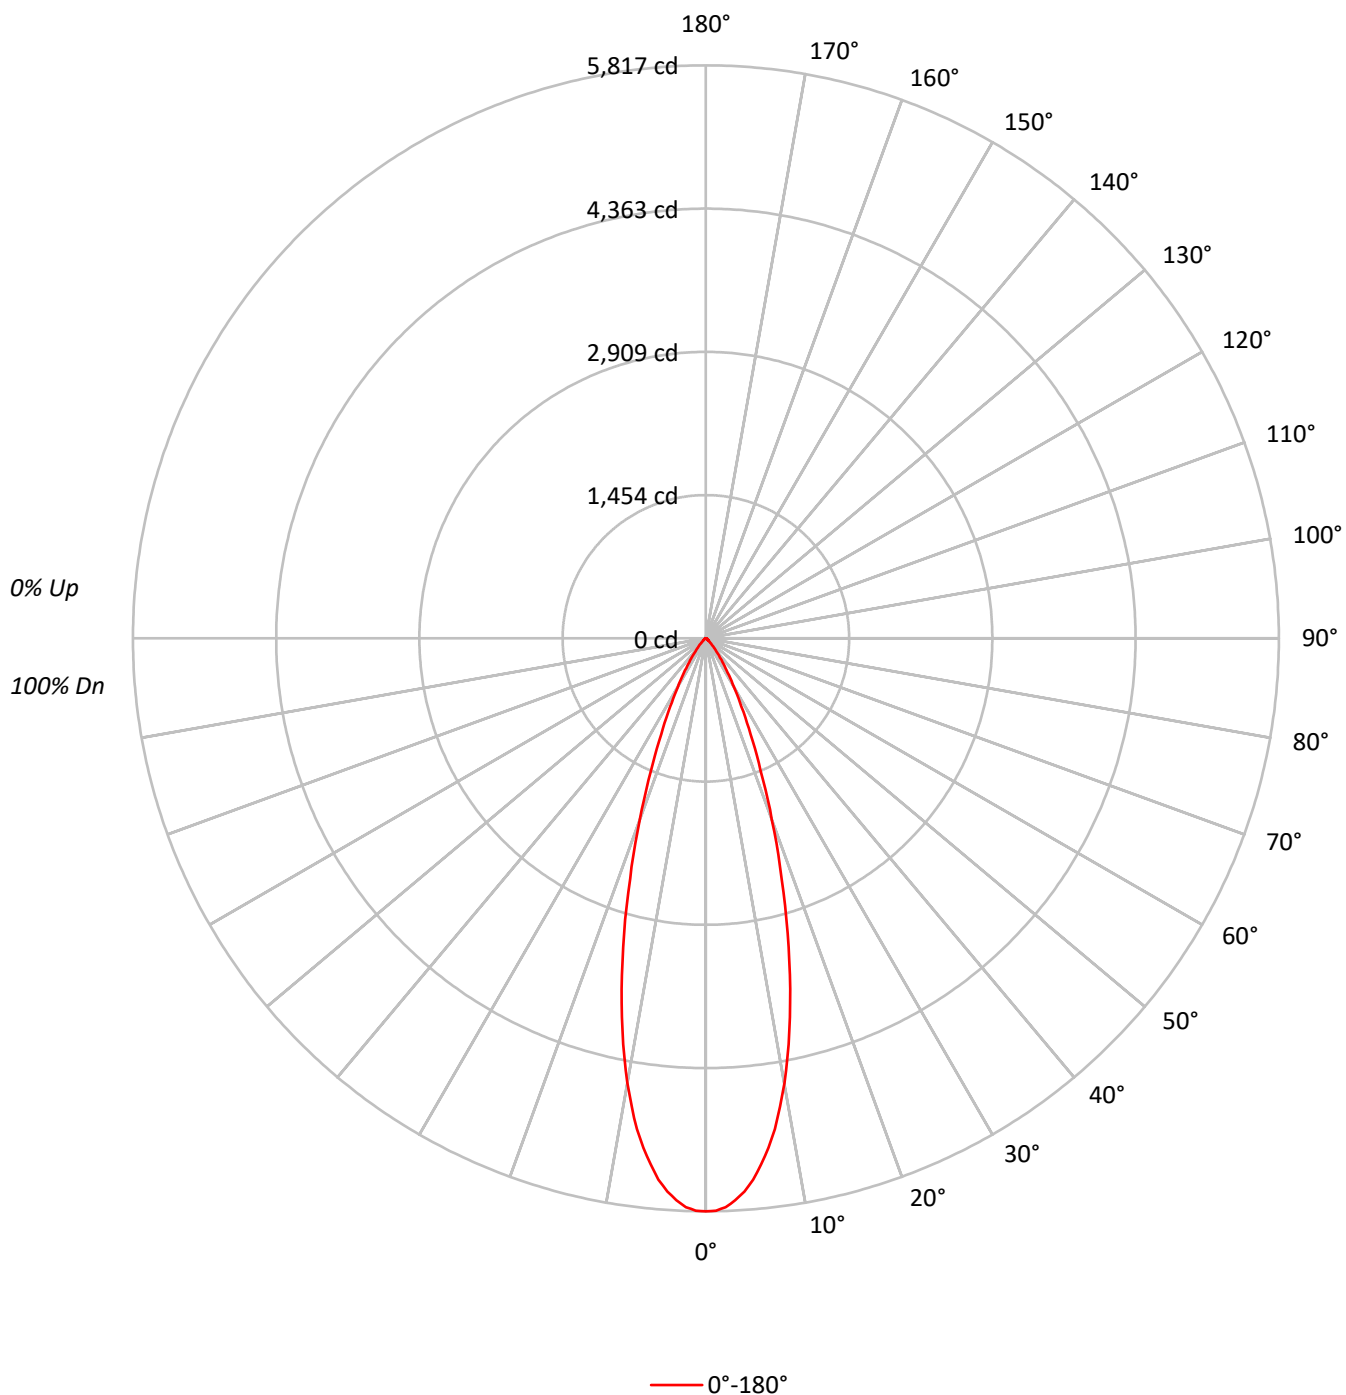

TEST NUMBER: P1261053

CATALOG NUMBER: P3AS24R309050D010 E3DLP1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99
2	110	105	102	99	107	104	101	98	101	98	96		98	96	94		95
3	105	100	96	92	103	98	95	91	96	93	90		94	91	89		91
4	101	95	90	87	99	94	89	86	92	88	85		90	87	84		88
5	97	90	85	82	96	89	85	81	88	84	81		86	83	80		85
6	94	86	81	78	92	85	81	77	84	80	77		83	79	76		81
7	90	82	77	74	89	82	77	74	81	76	73		80	76	73		79
8	87	79	74	71	86	79	74	71	78	73	70		77	73	70		76
9	84	76	71	68	83	75	71	68	75	70	67		74	70	67		73
10	81	73	68	65	80	73	68	65	72	68	65		71	67	65		71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1275600
5°	1214106
10°	1021224
15°	736486
20°	456836
25°	259805
30°	144301
35°	78487
40°	41392
45°	22421
50°	11974
55°	7914
60°	7236
65°	7524
70°	6604
75°	5253
80°	5177
85°	5284

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 22421 cd/sqm

TEST NUMBER: P1261053

CATALOG NUMBER: P3AS24R309050D010 E3DLP1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	496.7	22.7
10°-20°	882.9	40.4
20°-30°	510.2	23.3
30°-40°	193.6	8.9
40°-50°	59.5	2.7
50°-60°	20.0	0.9
60°-70°	13.6	0.6
70°-80°	7.4	0.3
80°-90°	2.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1889.8	86.4
0°-40°	2083.4	95.3
0°-60°	2162.9	98.9
0°-90°	2186.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2186.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5817	
5°	5516	497
15°	3244	883
25°	1074	510
35°	293	194
45°	72	59
55°	21	20
65°	14	14
75°	6	7
85°	2	2
90°	0	

TEST NUMBER: P1261053

CATALOG NUMBER: P3AS24R309050D010 E3DLP1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	5817.2
1°	5813.1
2°	5778.0
3°	5711.9
4°	5629.3
5°	5515.7
6°	5371.1
7°	5210.1
8°	5030.4
9°	4815.7
10°	4586.4
11°	4338.6
12°	4076.4
13°	3801.7
14°	3522.9
15°	3244.2
17.5°	2558.6
20°	1957.7
22.5°	1451.7
25°	1073.8
27.5°	780.6
30°	569.9
32.5°	410.9
35°	293.2
37.5°	204.4
40°	144.6
42.5°	101.2
45°	72.3
47.5°	49.6
50°	35.1
52.5°	24.8
55°	20.7
57.5°	18.6
60°	16.5
62.5°	14.5
65°	14.5
67.5°	12.4
70°	10.3
72.5°	8.3
75°	6.2
77.5°	6.2
80°	4.1
82.5°	4.1
85°	2.1
87.5°	0.0



TEST NUMBER: P1261053

CATALOG NUMBER: P3AS24R309050D010 E3DLP1WH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)