

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1261103

Luminaire Tested: P3AS24R409050D010 E3DLD1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1261103
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-22)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS24R409050D010 E3DLD1GPH
Description: 3in Adjustable LED luminaire with, R40 optic, 5000K CCT AND, 90CRI , E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 903.9 lumens
Efficiency: N/A
Efficacy: 31.4 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1261103
CATALOG NUMBER: P3AS24R409050D010 E3DLD1GPH

Luminous Intensity Polar Plot

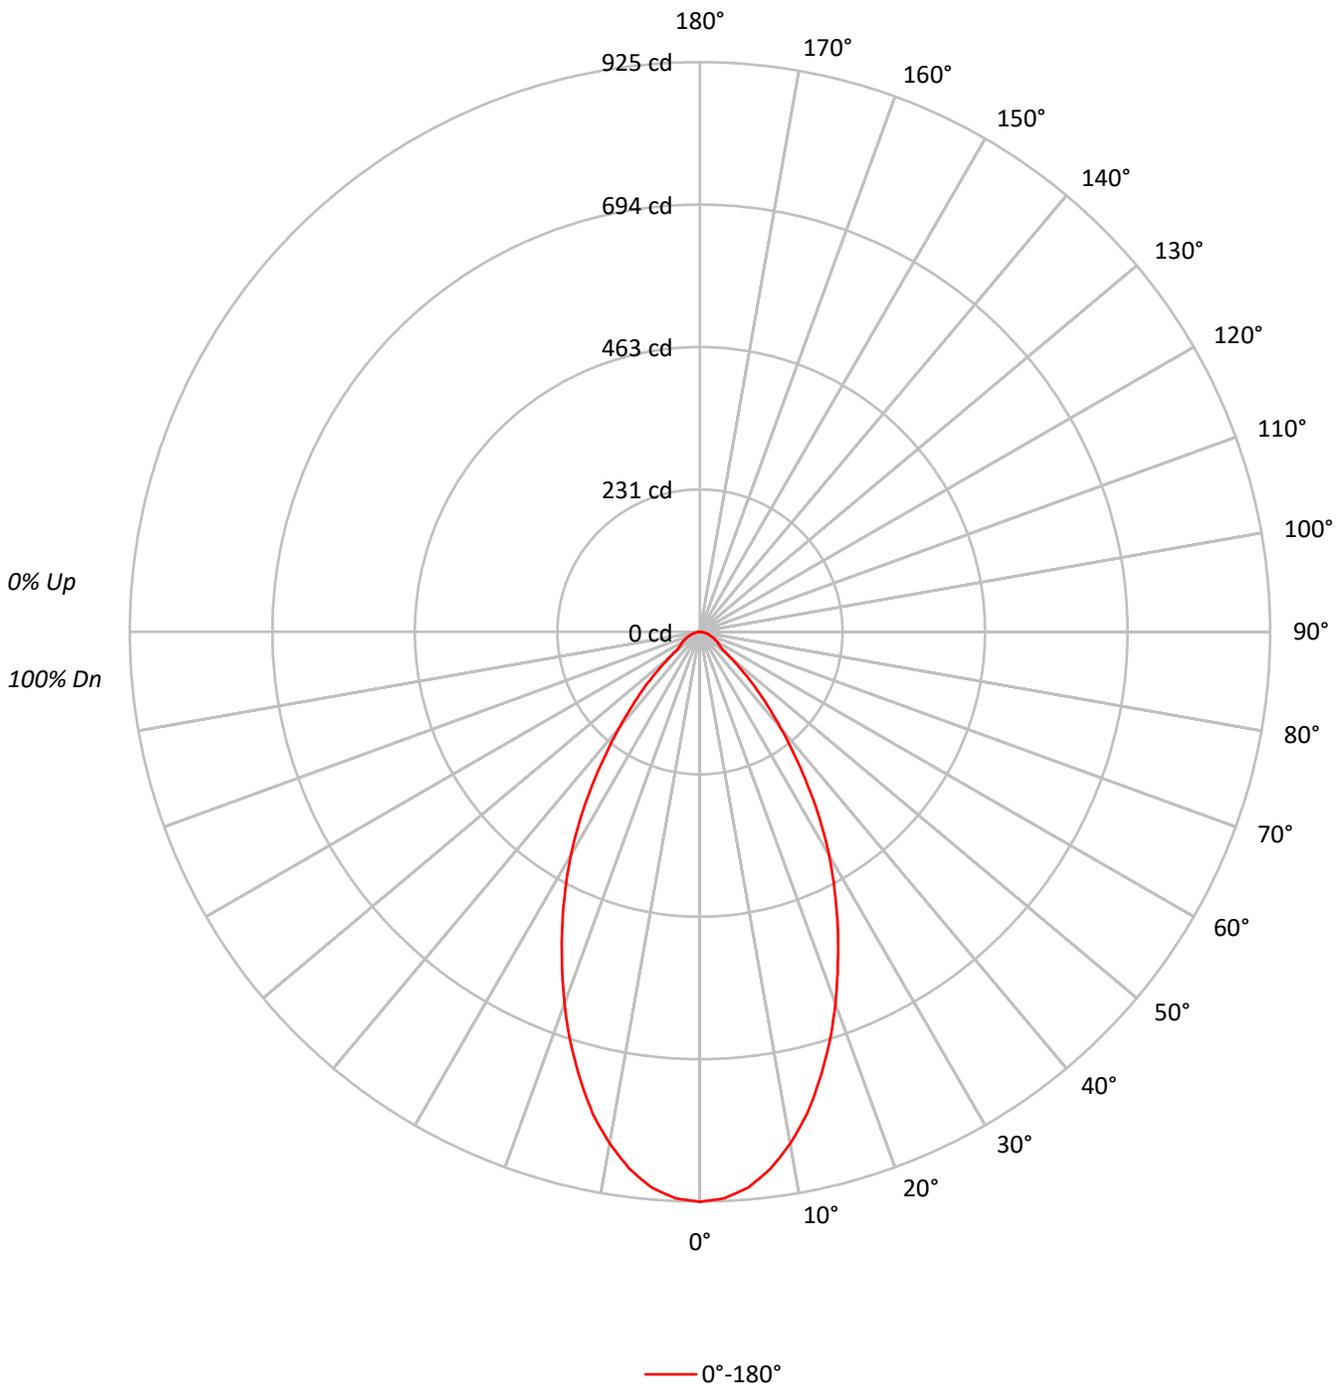



TEST NUMBER: P1261103
 CATALOG NUMBER: P3AS24R409050D010 E3DLD1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	106	104	110	107	104	102	103	101	99	99	98	96	96	94	93	91			
2	106	100	96	92	104	98	94	91	95	92	89	92	89	87	89	87	85	83			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76			
4	94	85	79	74	92	84	78	74	82	77	73	80	75	72	78	74	71	69			
5	89	79	73	68	87	78	72	67	76	71	67	75	70	66	73	69	66	64			
6	84	74	67	62	82	73	67	62	71	66	61	70	65	61	68	64	61	59			
7	79	69	62	57	78	68	62	57	67	61	57	65	60	57	64	60	56	55			
8	75	64	58	53	74	64	58	53	63	57	53	62	56	53	61	56	52	51			
9	71	60	54	50	70	60	54	50	59	53	49	58	53	49	57	52	49	48			
10	67	57	51	46	66	56	50	46	56	50	46	55	50	46	54	49	46	45			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	202922
5°	199251
10°	187817
15°	170603
20°	149860
25°	127991
30°	106016
35°	81753
40°	58195
45°	39198
50°	21389
55°	15063
60°	14209
65°	13127
70°	11669
75°	11099
80°	8966
85°	7548

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 39198 cd/sqm



TEST NUMBER: P1261103
 CATALOG NUMBER: P3AS24R409050D010 E3DLD1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	84.4	9.3
10°-20°	209.3	23.2
20°-30°	242.0	26.8
30°-40°	190.7	21.1
40°-50°	97.9	10.8
50°-60°	37.4	4.1
60°-70°	24.8	2.7
70°-80°	13.5	1.5
80°-90°	4.0	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	535.7	59.3
0°-40°	726.4	80.4
0°-60°	861.7	95.3
0°-90°	903.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	903.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	925	
5°	905	84
15°	752	209
25°	529	242
35°	305	191
45°	126	98
55°	39	37
65°	25	25
75°	13	13
85°	3	4
90°	0	



TEST NUMBER: P1261103
CATALOG NUMBER: P3AS24R409050D010 E3DLD1GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	925.4
2.5°	920.4
5°	905.2
7.5°	878.9
10°	843.5
12.5°	802.0
15°	751.5
17.5°	698.9
20°	642.2
22.5°	584.6
25°	529.0
27.5°	473.3
30°	418.7
32.5°	363.1
35°	305.4
37.5°	251.8
40°	203.3
42.5°	161.8
45°	126.4
47.5°	92.0
50°	62.7
52.5°	45.5
55°	39.4
57.5°	35.4
60°	32.4
62.5°	28.3
65°	25.3
67.5°	21.2
70°	18.2
72.5°	15.2
75°	13.1
77.5°	10.1
80°	7.1
82.5°	6.1
85°	3.0
87.5°	2.0
90°	0.0

(END OF REPORT)