

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1261226

Luminaire Tested: P3AS24R609050D010 E3DLP1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1261226
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-37)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS24R609050D010 E3DLP1WMH
Description: 3in Adjustable LED luminaire with, R60 optic, 5000K CCT AND, 90CRI , E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1501.0 lumens
Efficiency: N/A
Efficacy: 52.1 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1261226

CATALOG NUMBER: P3AS24R609050D010 E3DLP1WMH

Luminous Intensity Polar Plot

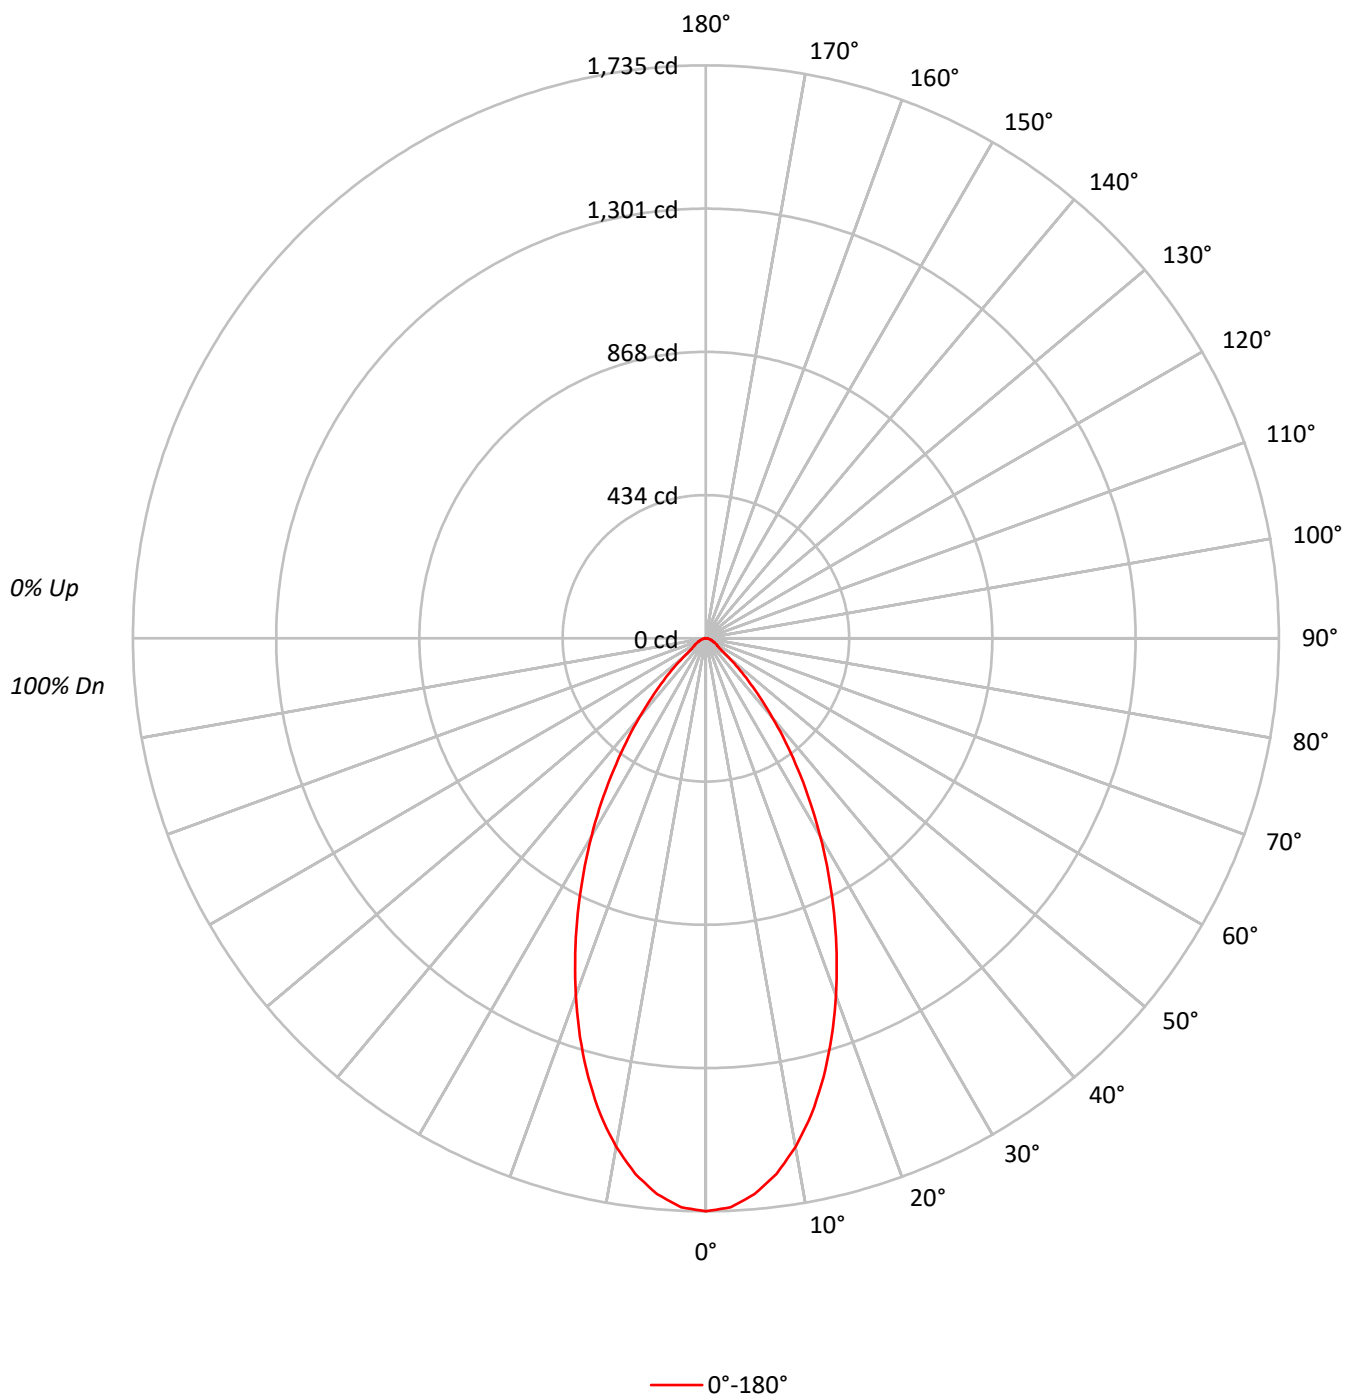

TEST NUMBER: P1261226

CATALOG NUMBER: P3AS24R609050D010 E3DLP1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	110	108	105	103	104	102	100		100	98	97		96
2	107	101	97	93	104	100	96	92	96	93	90		93	91	88		91
3	101	94	88	84	99	92	87	83	90	86	82		87	84	81		85
4	95	87	81	77	93	86	80	76	84	79	75		82	78	74		80
5	90	81	75	70	88	80	74	70	78	73	69		77	72	69		75
6	85	76	69	65	84	75	69	65	73	68	64		72	67	64		71
7	81	71	65	60	79	70	64	60	69	64	60		68	63	59		67
8	77	67	60	56	75	66	60	56	65	60	56		64	59	55		63
9	73	63	57	52	72	62	56	52	61	56	52		60	55	52		60
10	69	59	53	49	68	59	53	49	58	53	49		57	52	49		56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	380408
5°	371868
10°	348157
15°	312329
20°	268590
25°	222085
30°	175495
35°	130313
40°	89740
45°	56285
50°	30976
55°	18121
60°	16271
65°	13906
70°	11925
75°	12200
80°	10481
85°	10315

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 56285 cd/sqm

TEST NUMBER: P1261226

CATALOG NUMBER: P3AS24R609050D010 E3DLP1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	157.3	10.5
10°-20°	382.1	25.5
20°-30°	419.1	27.9
30°-40°	305.3	20.3
40°-50°	144.2	9.6
50°-60°	47.2	3.1
60°-70°	26.8	1.8
70°-80°	14.4	1.0
80°-90°	4.5	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	958.5	63.9
0°-40°	1263.8	84.2
0°-60°	1455.3	97.0
0°-90°	1501.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1501.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1735	
5°	1689	157
15°	1376	382
25°	918	419
35°	487	305
45°	182	144
55°	47	47
65°	27	27
75°	14	14
85°	4	5
90°	0	

TEST NUMBER: P1261226

CATALOG NUMBER: P3AS24R609050D010 E3DLP1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1734.8
2.5°	1724.4
5°	1689.4
7.5°	1635.8
10°	1563.6
12.5°	1476.9
15°	1375.8
17.5°	1266.5
20°	1151.0
22.5°	1033.4
25°	917.9
27.5°	802.4
30°	693.1
32.5°	587.9
35°	486.8
37.5°	396.0
40°	313.5
42.5°	241.3
45°	181.5
47.5°	132.0
50°	90.8
52.5°	59.8
55°	47.4
57.5°	41.3
60°	37.1
62.5°	30.9
65°	26.8
67.5°	22.7
70°	18.6
72.5°	16.5
75°	14.4
77.5°	10.3
80°	8.3
82.5°	6.2
85°	4.1
87.5°	2.1
90°	0.0

(END OF REPORT)