

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1261236

Luminaire Tested: P3AS24R659050D010 E3D1WH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1261236
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-16)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS24R659050D010 E3D1WH
Description: 3in Adjustable LED luminaire with, R65 optic, 5000K CCT AND, 90CRI , E3D1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2462.0 lumens
Efficiency: N/A
Efficacy: 85.5 lumens/watt
Spacing Criteria (0/90/45): 0.92 / 0.92 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1261236

CATALOG NUMBER: P3AS24R659050D010 E3D1WH

Luminous Intensity Polar Plot

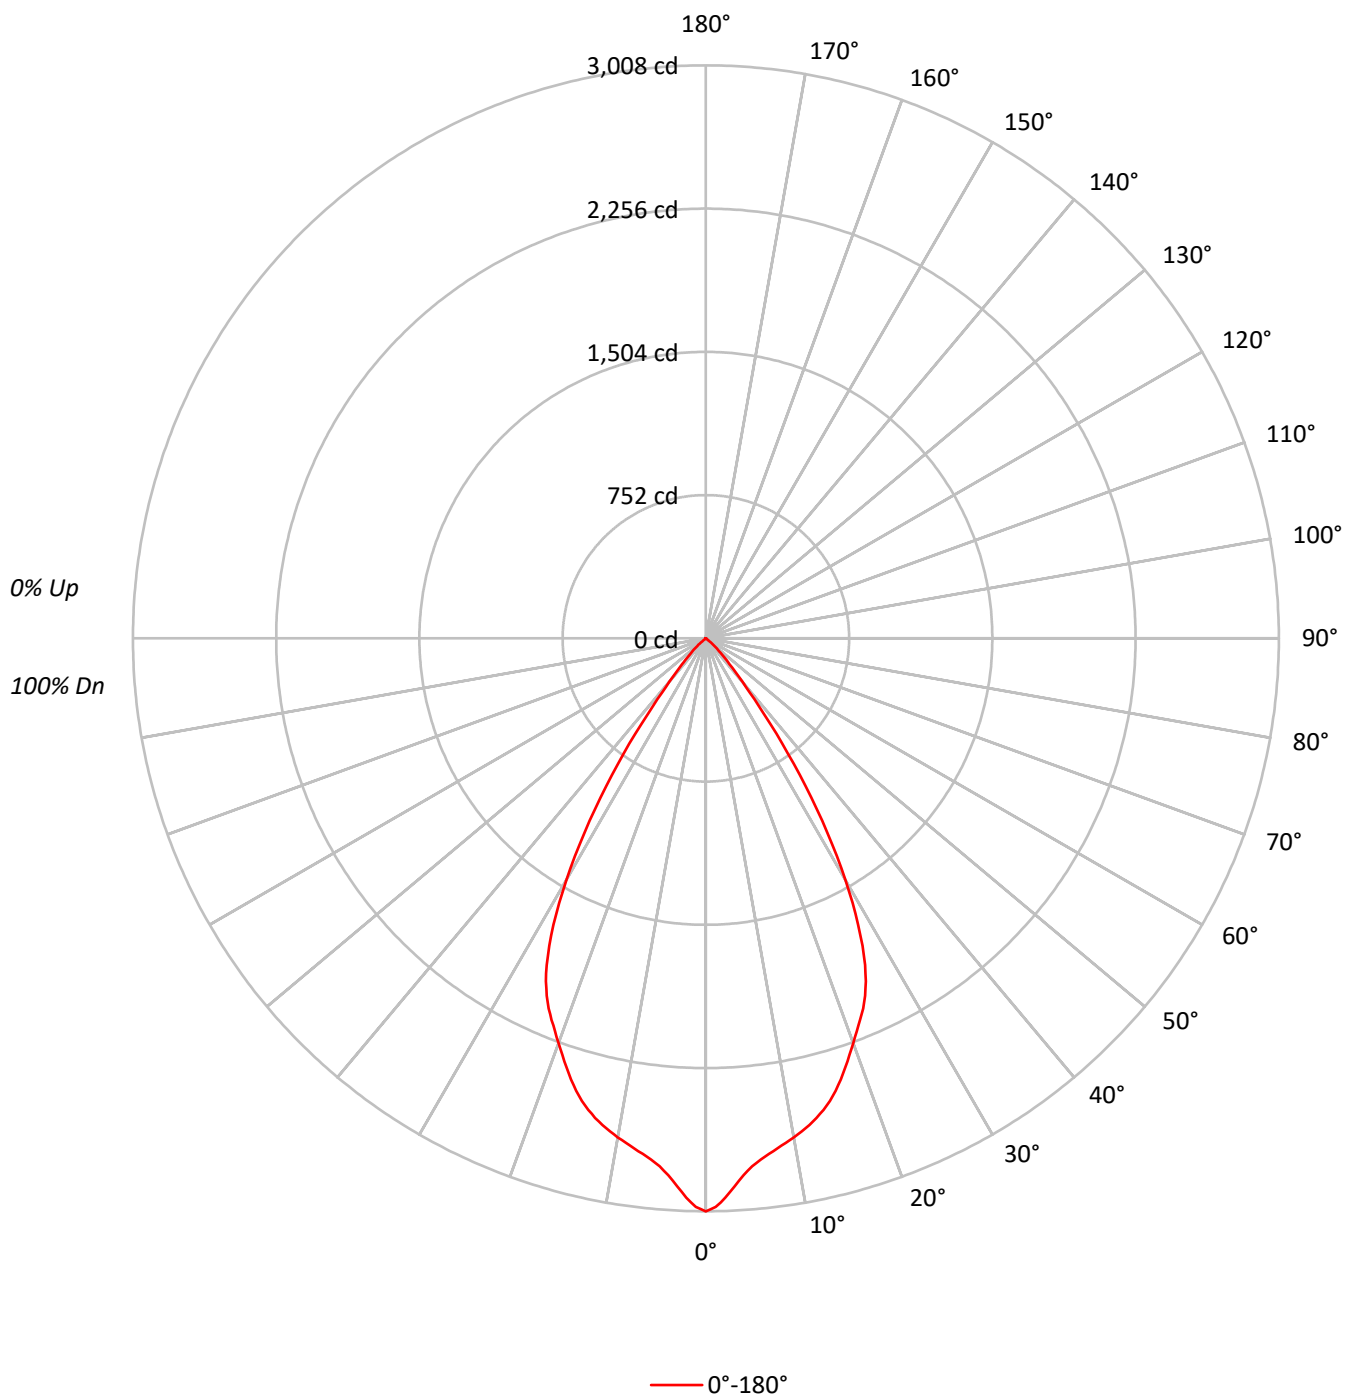

TEST NUMBER: P1261236

CATALOG NUMBER: P3AS24R659050D010 E3D1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	106	111	109	107	105	105	103	102		101	100	99		98
2	108	104	100	96	106	102	98	95	99	96	93		96	93	91		93
3	103	97	92	88	101	95	91	88	93	89	86		90	87	85		88
4	98	91	85	81	96	90	85	81	87	83	80		85	82	79		84
5	93	85	79	75	92	84	79	75	82	78	74		81	77	74		79
6	89	80	74	70	87	79	74	70	78	73	69		76	72	69		75
7	84	75	70	65	83	75	69	65	73	69	65		72	68	65		71
8	80	71	65	61	79	71	65	61	69	64	61		68	64	61		67
9	77	67	61	58	76	67	61	57	66	61	57		65	60	57		64
10	73	64	58	54	72	63	58	54	62	57	54		62	57	54		61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	659706
5°	612545
10°	592374
15°	570877
20°	527776
25°	480875
30°	371526
35°	215358
40°	85446
45°	36407
50°	8631
55°	1147
60°	877
65°	519
70°	641
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 36407 cd/sqm

TEST NUMBER: P1261236

CATALOG NUMBER: P3AS24R659050D010 E3D1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	262.5	10.7
10°-20°	700.7	28.5
20°-30°	886.8	36.0
30°-40°	505.0	20.5
40°-50°	100.3	4.1
50°-60°	5.2	0.2
60°-70°	1.4	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1850.0	75.1
0°-40°	2355.0	95.7
0°-60°	2460.5	99.9
0°-90°	2462.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2462.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3008	
5°	2783	262
15°	2515	701
25°	1988	887
35°	804	505
45°	117	100
55°	3	5
65°	1	1
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1261236

CATALOG NUMBER: P3AS24R659050D010 E3D1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	3008.5
1°	2986.2
2°	2937.7
3°	2881.0
4°	2825.4
5°	2782.8
6°	2751.5
7°	2726.2
8°	2703.9
9°	2681.7
10°	2660.4
11°	2637.1
12°	2612.8
13°	2583.5
14°	2552.1
15°	2514.7
16°	2470.2
17°	2421.6
18°	2369.0
19°	2313.3
20°	2261.7
21°	2209.1
22°	2161.5
23°	2111.9
24°	2054.2
25°	1987.5
26°	1907.5
27°	1811.4
28°	1703.1
29°	1587.7
30°	1467.3
31°	1334.8
32°	1203.2
32.5°	1135.4
33°	1069.6
34°	936.0
35°	804.5
36°	683.1
37°	562.6
37.5°	500.9
38°	451.3
39°	365.3
40°	298.5
42.5°	184.2
45°	117.4



TEST NUMBER: P1261236

CATALOG NUMBER: P3AS24R659050D010 E3D1WH

CANDELA DISTRIBUTION (continued):

	0°
47.5°	68.8
50°	25.3
52.5°	5.1
55°	3.0
57.5°	2.0
60°	2.0
62.5°	2.0
65°	1.0
67.5°	1.0
70°	1.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)