

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1246927

Luminaire Tested: P3AS13R359024DE010 E3DLD1WH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1246927
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-18)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R359024DE010 E3DLD1WH
Description: 3in Adjustable LED luminaire with, R35 optic, 2400K CCT AND, 90CRI , E3DLD1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 693.0 lumens
Efficiency: N/A
Efficacy: 47.5 lumens/watt
Spacing Criteria (0/90/45): 0.8 / 0.8 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1246927

CATALOG NUMBER: P3AS13R359024DE010 E3DLD1WH

Luminous Intensity Polar Plot

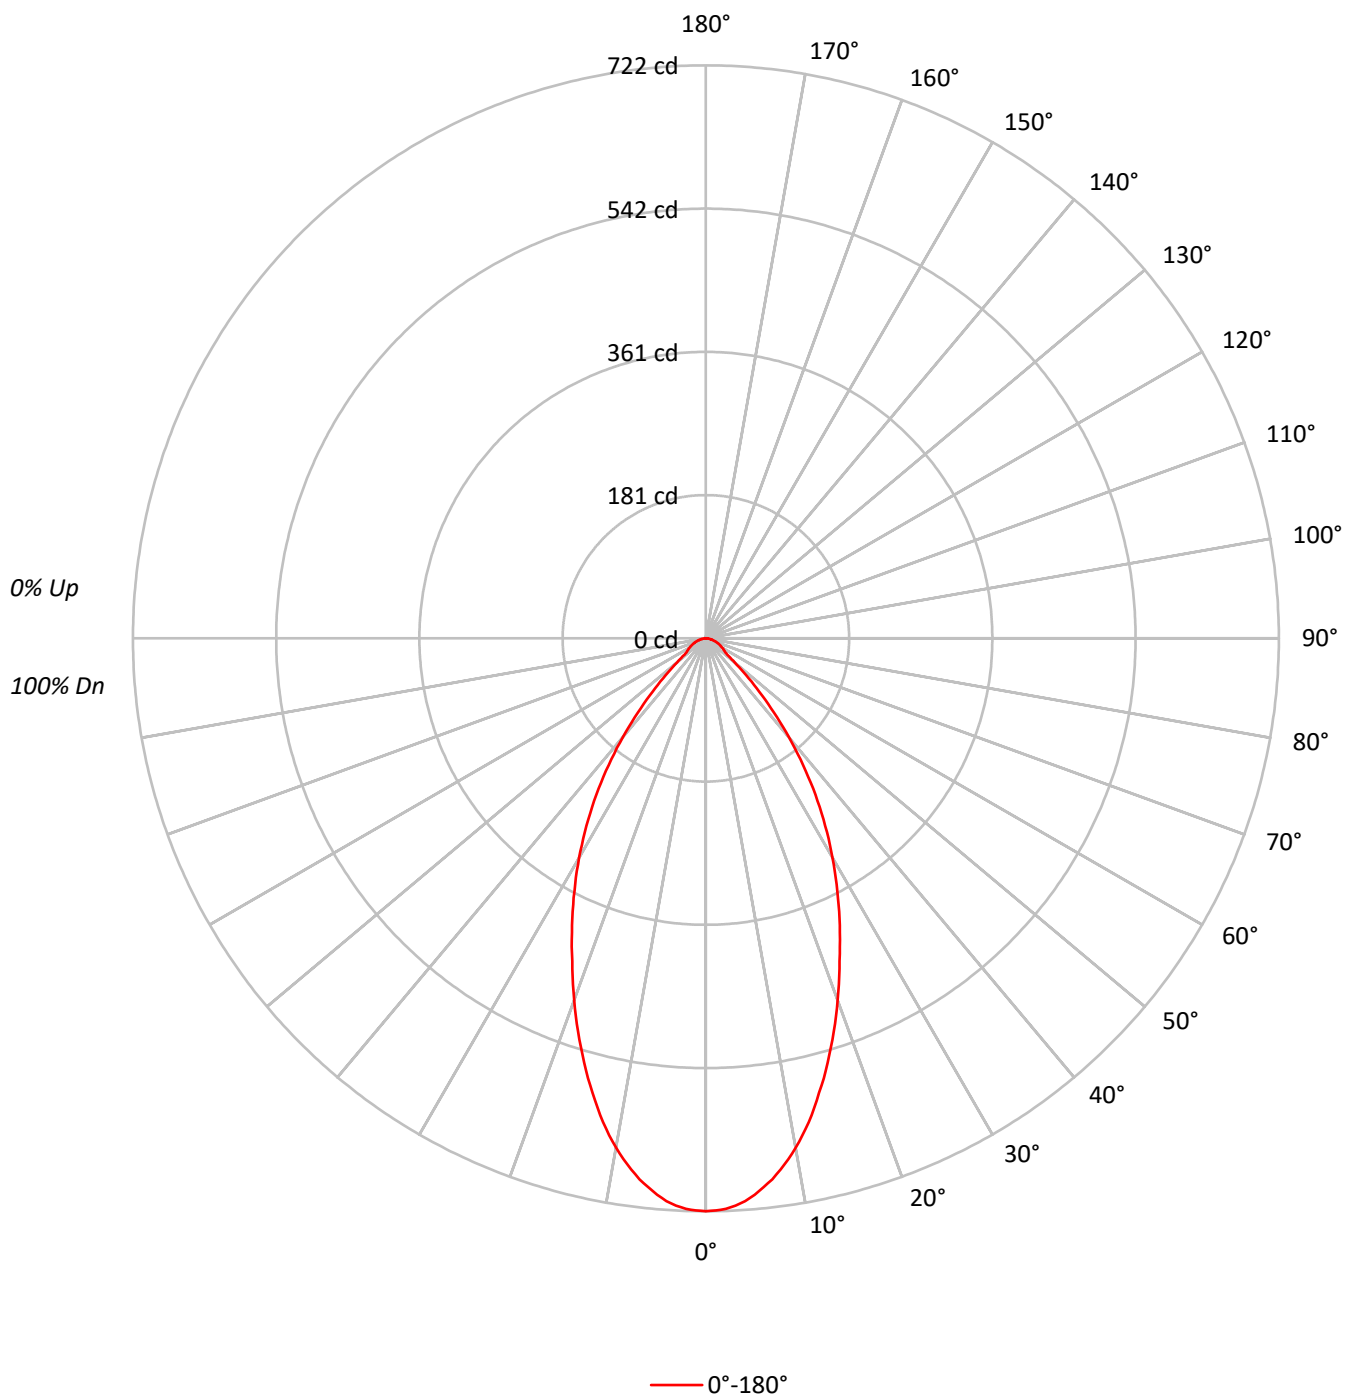



TEST NUMBER: P1246927

CATALOG NUMBER: P3AS13R359024DE010 E3DLD1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96
2	106	100	96	92	104	98	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	81	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	75	72		78
5	89	79	73	68	87	78	72	67	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	61		70	65	61		68
7	79	69	62	57	78	68	62	57	67	61	57		65	60	57		64
8	75	64	58	53	74	64	57	53	63	57	53		62	56	53		61
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	158299
5°	154941
10°	145110
15°	130262
20°	113317
25°	96562
30°	80873
35°	64407
40°	46573
45°	29491
50°	16068
55°	11125
60°	10525
65°	9755
70°	9361
75°	7964
80°	7577
85°	6542

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 29491 cd/sqm

TEST NUMBER: P1246927

CATALOG NUMBER: P3AS13R359024DE010 E3DLD1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	65.5	9.5
10°-20°	159.7	23.0
20°-30°	183.0	26.4
30°-40°	149.3	21.5
40°-50°	75.3	10.9
50°-60°	28.0	4.0
60°-70°	18.7	2.7
70°-80°	10.4	1.5
80°-90°	3.2	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	408.2	58.9
0°-40°	557.5	80.4
0°-60°	660.7	95.3
0°-90°	693.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	693.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	722	
5°	704	66
15°	574	160
25°	399	183
35°	241	149
45°	95	75
55°	29	28
65°	19	19
75°	9	10
85°	3	3
90°	0	

TEST NUMBER: P1246927

CATALOG NUMBER: P3AS13R359024DE010 E3DLD1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	721.9
1°	721.1
2°	719.3
3°	715.9
4°	710.8
5°	703.9
6°	695.4
7°	686.8
8°	675.7
9°	664.5
10°	651.7
11°	638.0
12°	623.4
13°	607.2
14°	590.0
15°	573.8
17.5°	530.1
20°	485.6
22.5°	440.2
25°	399.1
27.5°	358.8
30°	319.4
32.5°	280.0
35°	240.6
37.5°	201.2
40°	162.7
42.5°	126.7
45°	95.1
47.5°	68.5
50°	47.1
52.5°	34.3
55°	29.1
57.5°	26.5
60°	24.0
62.5°	21.4
65°	18.8
67.5°	16.3
70°	14.6
72.5°	12.0
75°	9.4
77.5°	7.7
80°	6.0
82.5°	4.3
85°	2.6
87.5°	1.7



TEST NUMBER: P1246927

CATALOG NUMBER: P3AS13R359024DE010 E3DLD1WH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)