

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1247410

Luminaire Tested: P3AS17R559024DE010 E3DL1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1247410
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-35)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R559024DE010 E3DL1GPH
Description: 3in Adjustable LED luminaire with, R55 optic, 2400K CCT AND, 90CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 607.0 lumens
Efficiency: N/A
Efficacy: 28.6 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.81
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1247410

CATALOG NUMBER: P3AS17R559024DE010 E3DL1GPH

Luminous Intensity Polar Plot

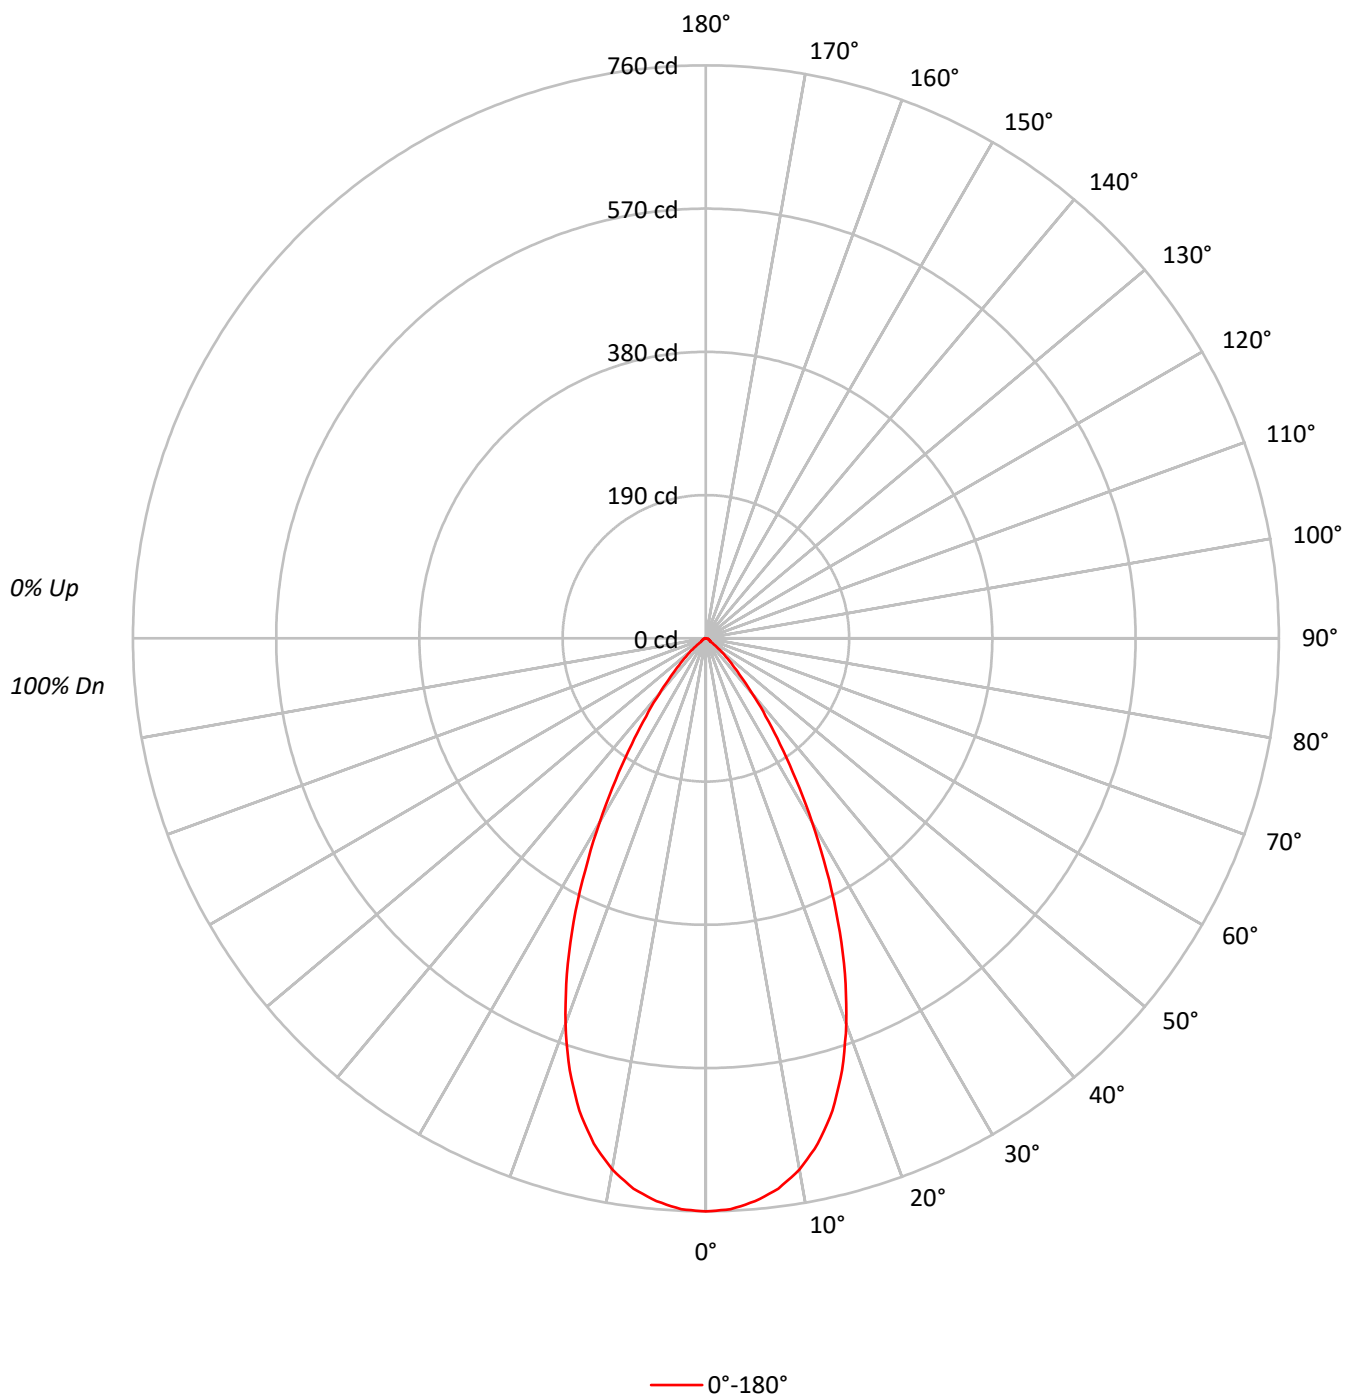

TEST NUMBER: P1247410

CATALOG NUMBER: P3AS17R559024DE010 E3DL1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	111	108	106	111	108	106	104	104	103	101		101	99	98		97
2	108	103	99	95	106	101	97	94	98	95	92		95	92	90		92
3	102	96	91	87	100	94	90	86	92	88	85		89	86	83		87
4	97	90	84	80	95	89	83	79	86	82	78		84	81	78		82
5	92	84	78	74	91	83	78	74	81	77	73		80	76	72		78
6	88	79	73	69	86	78	73	68	77	72	68		75	71	68		74
7	84	74	68	64	82	74	68	64	72	67	64		71	67	63		70
8	80	70	64	60	78	70	64	60	69	63	60		67	63	60		67
9	76	66	61	57	75	66	60	56	65	60	56		64	59	56		63
10	73	63	57	53	72	62	57	53	62	57	53		61	56	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	166675
5°	164979
10°	159338
15°	147265
20°	127084
25°	100385
30°	71201
35°	45909
40°	27566
45°	15536
50°	8358
55°	2982
60°	2675
65°	2594
70°	2500
75°	2372
80°	2147
85°	1510

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 15536 cd/sqm

TEST NUMBER: P1247410

CATALOG NUMBER: P3AS17R559024DE010 E3DL1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	70.5	11.6
10°-20°	179.4	29.6
20°-30°	188.0	31.0
30°-40°	109.7	18.1
40°-50°	41.0	6.8
50°-60°	9.7	1.6
60°-70°	5.0	0.8
70°-80°	2.9	0.5
80°-90°	0.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	437.9	72.1
0°-40°	547.6	90.2
0°-60°	598.3	98.6
0°-90°	607.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	607.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	760	
5°	750	70
15°	649	179
25°	415	188
35°	172	110
45°	50	41
55°	8	10
65°	5	5
75°	3	3
85°	1	1
90°	0	

TEST NUMBER: P1247410

CATALOG NUMBER: P3AS17R559024DE010 E3DL1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	760.1
2.5°	757.9
5°	749.5
7.5°	736.2
10°	715.6
12.5°	686.6
15°	648.7
17.5°	600.8
20°	544.6
22.5°	481.7
25°	414.9
27.5°	346.4
30°	281.2
32.5°	222.2
35°	171.5
37.5°	130.3
40°	96.3
42.5°	69.1
45°	50.1
47.5°	36.2
50°	24.5
52.5°	13.9
55°	7.8
57.5°	6.7
60°	6.1
62.5°	5.6
65°	5.0
67.5°	4.5
70°	3.9
72.5°	3.3
75°	2.8
77.5°	2.2
80°	1.7
82.5°	1.1
85°	0.6
87.5°	0.6
90°	0.0

(END OF REPORT)