

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1247559

Luminaire Tested: P3AS20R209024D010 E3DLD1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1247559
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-6)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R209024D010 E3DLD1GPH
Description: 3in Adjustable LED luminaire with, R20 optic, 2400K CCT AND, 90CRI , E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 574.9 lumens
Efficiency: N/A
Efficacy: 20.0 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1247559

CATALOG NUMBER: P3AS20R209024D010 E3DLD1GPH

Luminous Intensity Polar Plot

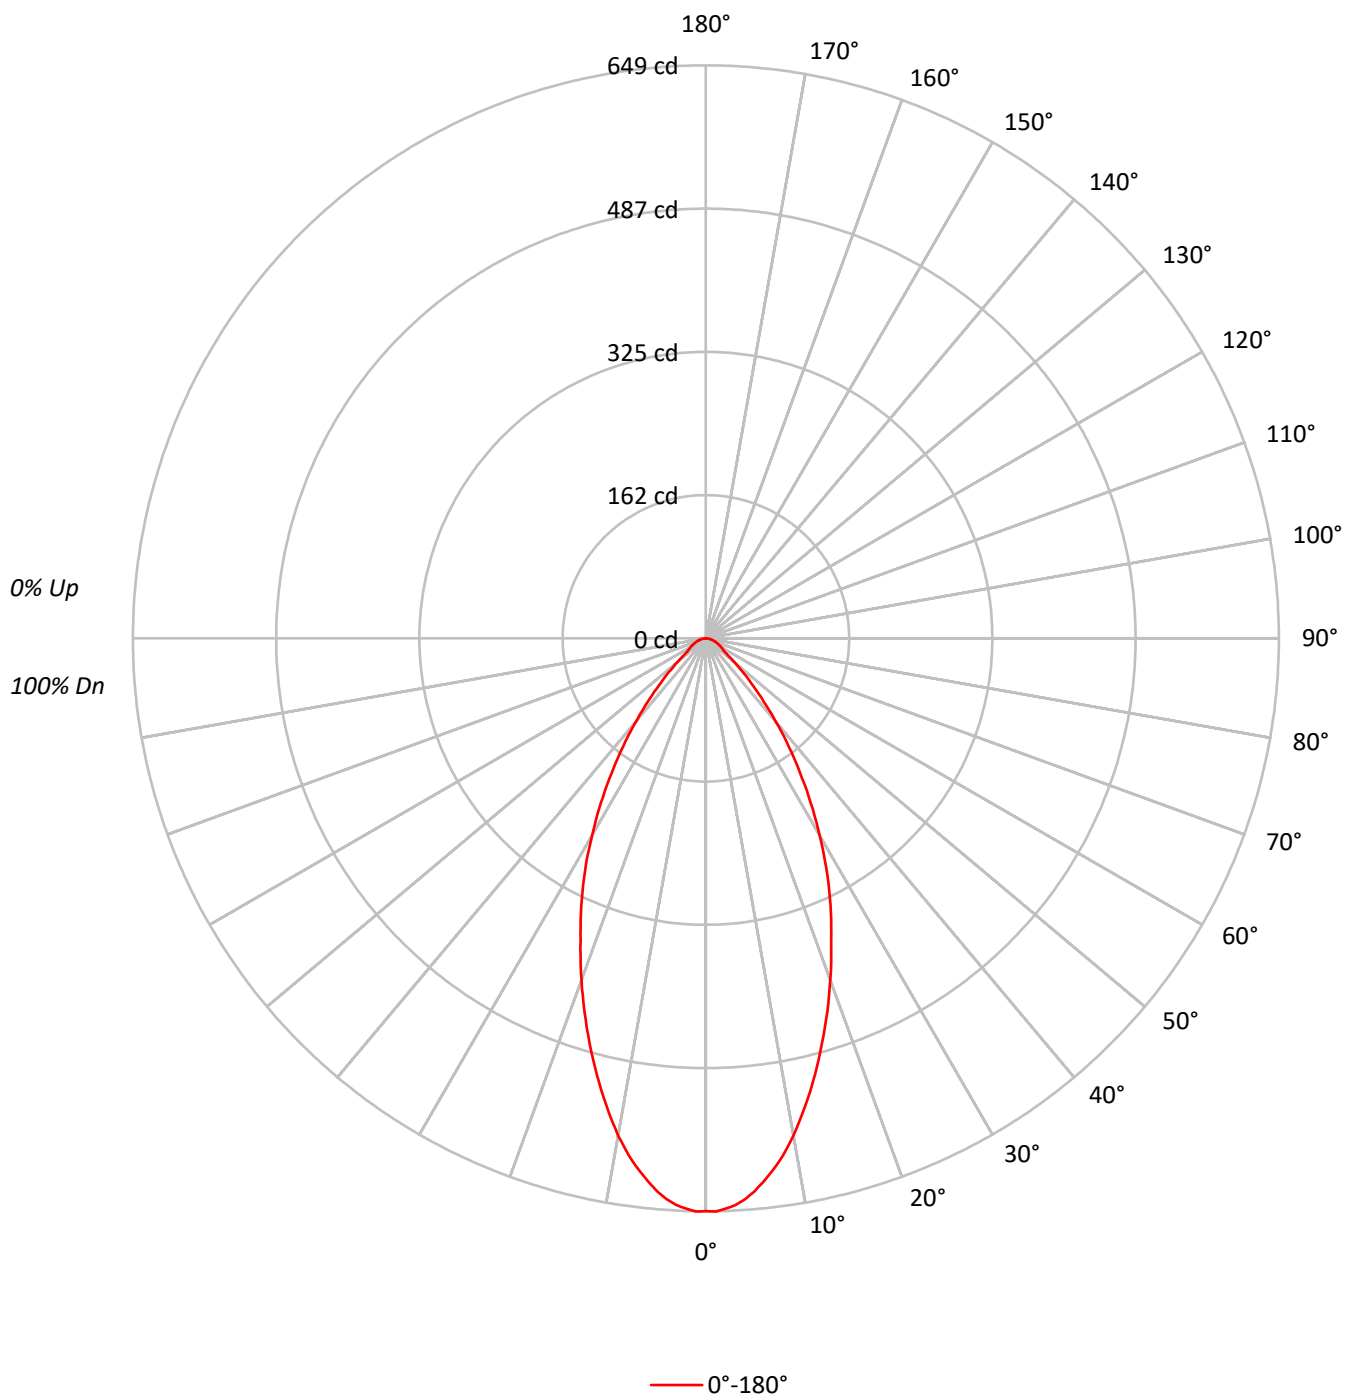



TEST NUMBER: P1247559

CATALOG NUMBER: P3AS20R209024D010 E3DLD1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	109	106	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		90
3	100	93	87	82	98	91	86	82	88	84	80		86	82	79		84
4	94	86	79	75	92	85	79	74	82	77	73		80	76	72		78
5	89	80	73	68	87	79	73	68	77	71	67		75	70	67		73
6	84	74	68	63	82	73	67	63	72	66	62		70	65	62		69
7	80	69	63	58	78	69	62	58	67	62	58		66	61	57		65
8	75	65	59	54	74	64	58	54	63	58	54		62	57	53		61
9	72	61	55	50	70	61	55	50	60	54	50		59	54	50		58
10	68	58	51	47	67	57	51	47	56	51	47		56	51	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	142225
5°	138432
10°	127341
15°	112101
20°	96142
25°	80763
30°	65276
35°	49657
40°	35323
45°	23320
50°	14464
55°	9481
60°	8640
65°	7939
70°	7501
75°	6778
80°	6440
85°	5535

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 23320 cd/sqm

TEST NUMBER: P1247559

CATALOG NUMBER: P3AS20R209024D010 E3DLD1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	58.2	10.1
10°-20°	137.5	23.9
20°-30°	152.6	26.5
30°-40°	116.4	20.2
40°-50°	59.6	10.4
50°-60°	24.5	4.3
60°-70°	15.2	2.6
70°-80°	8.6	1.5
80°-90°	2.5	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	348.2	60.6
0°-40°	464.6	80.8
0°-60°	548.6	95.4
0°-90°	574.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	574.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	649	
5°	629	58
15°	494	137
25°	334	153
35°	186	116
45°	75	60
55°	25	24
65°	15	15
75°	8	9
85°	2	2
90°	0	

TEST NUMBER: P1247559

CATALOG NUMBER: P3AS20R209024D010 E3DLD1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	648.6
1°	649.3
2°	646.4
3°	642.8
4°	636.9
5°	628.9
6°	619.4
7°	609.2
8°	598.2
9°	585.1
10°	571.9
12.5°	533.9
15°	493.8
17.5°	452.9
20°	412.0
22.5°	371.0
25°	333.8
27.5°	296.5
30°	257.8
32.5°	221.3
35°	185.5
37.5°	154.1
40°	123.4
42.5°	97.1
45°	75.2
47.5°	57.0
50°	42.4
52.5°	31.4
55°	24.8
57.5°	22.6
60°	19.7
62.5°	17.5
65°	15.3
67.5°	13.1
70°	11.7
72.5°	9.5
75°	8.0
77.5°	6.6
80°	5.1
82.5°	3.7
85°	2.2
87.5°	0.7
90°	0.0

(END OF REPORT)