

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1261302

Luminaire Tested: P3AS02R089727DE010 E3CB1MB

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1261302  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2408-211-1)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS02R089727DE010 E3CB1MB  
Description: 3in Adjustable LED luminaire with, R08 optic, 2700K CCT AND, 97CRI , E3CB1MB TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 207.0 lumens  
Efficiency: N/A  
Efficacy: 42.2 lumens/watt  
Spacing Criteria (0/90/45): 0.16 / 0.16 / 0.16  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 4.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1261302

CATALOG NUMBER: P3AS02R089727DE010 E3CB1MB

### Luminous Intensity Polar Plot

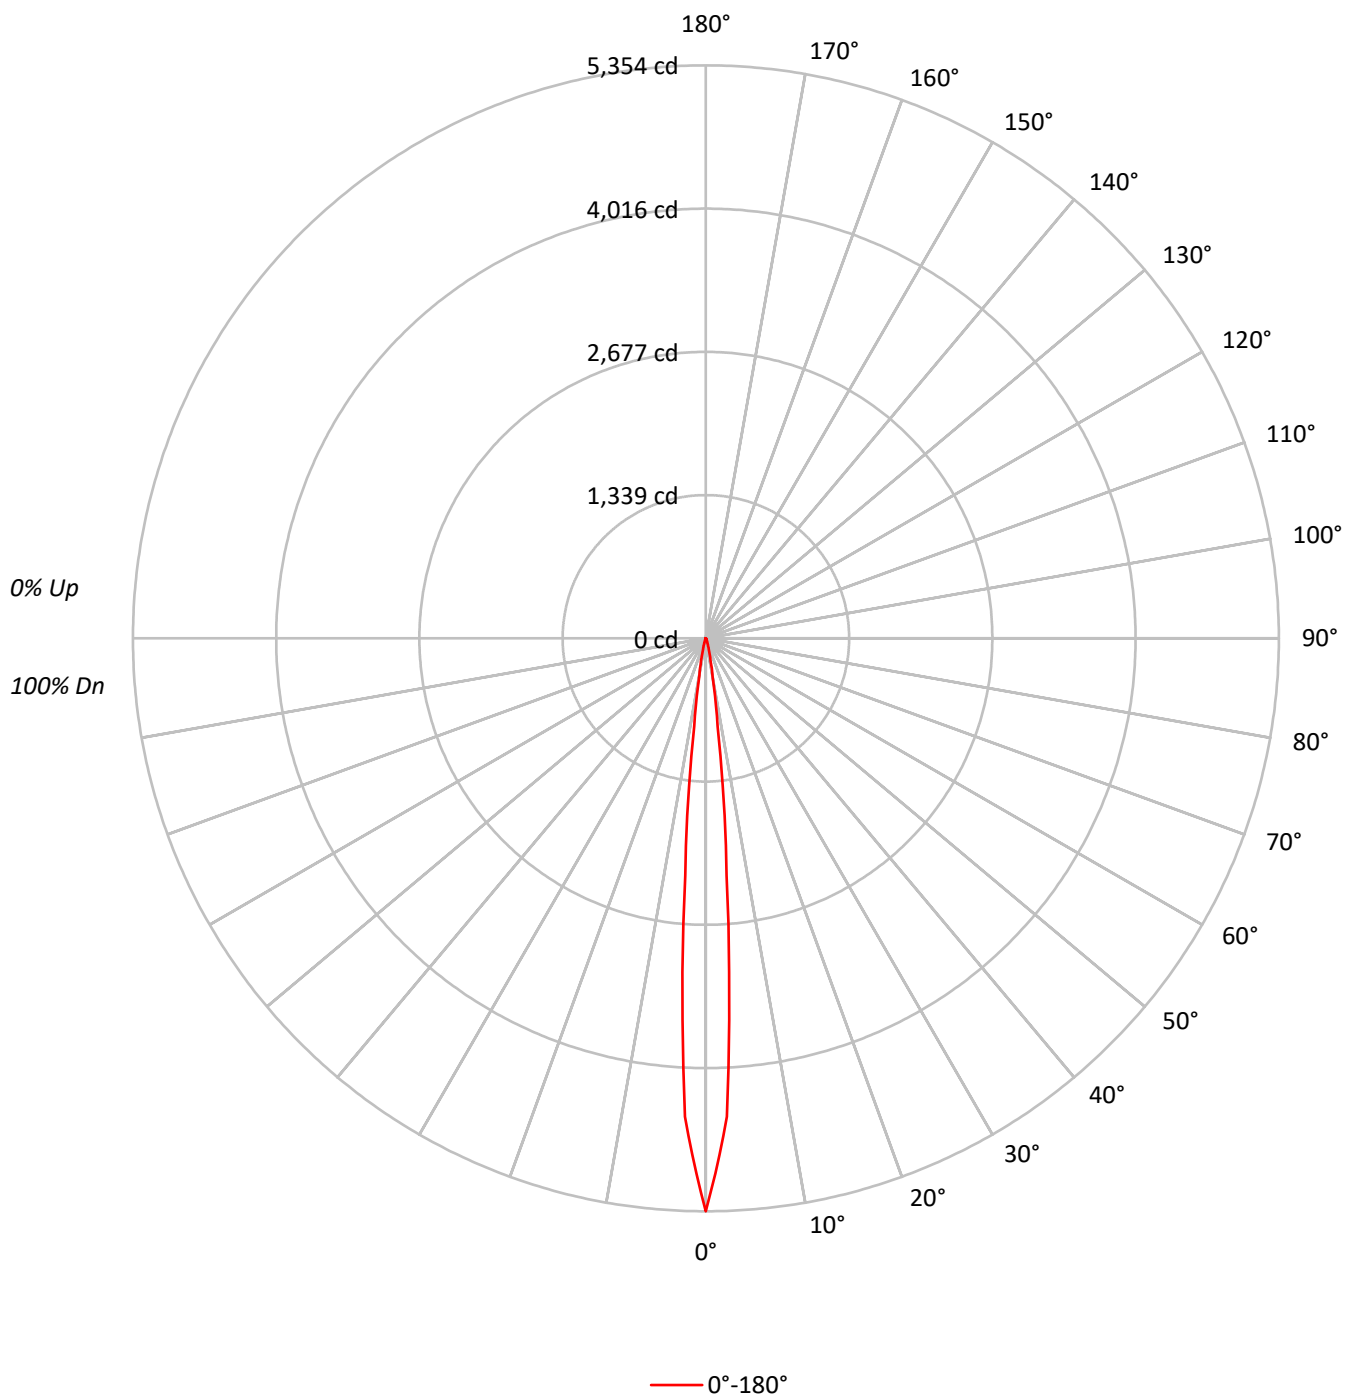

TEST NUMBER: P1261302

CATALOG NUMBER: P3AS02R089727DE010 E3CB1MB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |  |     |     |     |     |  |     |     |     |  |     |     |     |  |     |     |     |
|-----|-----|-----|-----|-----|--|-----|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|
| RF  | 20  |     |     |     |  | 20  |     |     |     |  | 20  |     |     |  |     | 20  |     |  |     |     | 20  |
| RC  | 80  |     |     |     |  | 70  |     |     |     |  | 50  |     |     |  |     | 30  |     |  |     |     | 10  |
| RW  | 70  | 50  | 30  | 10  |  | 70  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  |
| RCR |     |     |     |     |  |     |     |     |     |  |     |     |     |  |     |     |     |  |     |     |     |
| 0   | 119 | 119 | 119 | 119 |  | 116 | 116 | 116 | 116 |  | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 | 102 | 102 |
| 1   | 116 | 114 | 113 | 111 |  | 114 | 112 | 111 | 110 |  | 108 | 107 | 106 |  | 105 | 104 | 103 |  | 101 | 101 | 100 |
| 2   | 113 | 111 | 108 | 106 |  | 111 | 109 | 107 | 105 |  | 106 | 104 | 103 |  | 103 | 102 | 101 |  | 101 | 100 | 99  |
| 3   | 111 | 108 | 105 | 103 |  | 109 | 106 | 104 | 102 |  | 104 | 102 | 100 |  | 102 | 100 | 99  |  | 100 | 98  | 97  |
| 4   | 109 | 105 | 102 | 100 |  | 108 | 104 | 101 | 99  |  | 102 | 100 | 98  |  | 100 | 99  | 97  |  | 99  | 97  | 96  |
| 5   | 107 | 103 | 100 | 98  |  | 106 | 102 | 99  | 97  |  | 101 | 98  | 97  |  | 99  | 97  | 96  |  | 98  | 96  | 95  |
| 6   | 105 | 101 | 98  | 96  |  | 104 | 100 | 98  | 96  |  | 99  | 97  | 95  |  | 98  | 96  | 95  |  | 97  | 95  | 94  |
| 7   | 104 | 100 | 97  | 95  |  | 103 | 99  | 96  | 94  |  | 98  | 96  | 94  |  | 97  | 95  | 94  |  | 96  | 94  | 93  |
| 8   | 103 | 98  | 95  | 93  |  | 102 | 98  | 95  | 93  |  | 97  | 95  | 93  |  | 96  | 94  | 93  |  | 95  | 94  | 92  |
| 9   | 101 | 97  | 94  | 92  |  | 101 | 97  | 94  | 92  |  | 96  | 94  | 92  |  | 95  | 93  | 92  |  | 95  | 93  | 92  |
| 10  | 100 | 96  | 93  | 91  |  | 100 | 96  | 93  | 91  |  | 95  | 93  | 91  |  | 94  | 92  | 91  |  | 94  | 92  | 91  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |         |
|-----|---------|
|     | 0°      |
| 0°  | 1174029 |
| 5°  | 489565  |
| 10° | 78778   |
| 15° | 22588   |
| 20° | 7607    |
| 25° | 3363    |
| 30° | 1848    |
| 35° | 1312    |
| 40° | 1174    |
| 45° | 744     |
| 50° | 546     |
| 55° | 306     |
| 60° | 351     |
| 65° | 415     |
| 70° | 0       |
| 75° | 0       |
| 80° | 0       |
| 85° | 0       |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 744 cd/sqm

TEST NUMBER: P1261302

CATALOG NUMBER: P3AS02R089727DE010 E3CB1MB

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 159.7  | 77.1      |
| 10°-20°   | 33.4   | 16.2      |
| 20°-30°   | 7.3    | 3.5       |
| 30°-40°   | 3.2    | 1.5       |
| 40°-50°   | 1.9    | 0.9       |
| 50°-60°   | 0.8    | 0.4       |
| 60°-70°   | 0.7    | 0.3       |
| 70°-80°   | 0.0    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 200.4  | 96.8      |
| 0°-40°    | 203.5  | 98.3      |
| 0°-60°    | 206.3  | 99.7      |
| 0°-90°    | 207.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 207.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 5354 |      |
| 5°  | 2224 | 160  |
| 15° | 100  | 33   |
| 25° | 14   | 7    |
| 35° | 5    | 3    |
| 45° | 2    | 2    |
| 55° | 1    | 1    |
| 65° | 1    | 1    |
| 75° | 0    | 0    |
| 85° | 0    | 0    |
| 90° | 0    |      |

TEST NUMBER: P1261302

CATALOG NUMBER: P3AS02R089727DE010 E3CB1MB

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 5354.0 |
| 2.5°  | 4475.1 |
| 5°    | 2224.1 |
| 7.5°  | 829.2  |
| 10°   | 353.8  |
| 12.5° | 182.6  |
| 15°   | 99.5   |
| 17.5° | 56.3   |
| 20°   | 32.6   |
| 22.5° | 21.2   |
| 25°   | 13.9   |
| 27.5° | 10.6   |
| 30°   | 7.3    |
| 32.5° | 5.7    |
| 35°   | 4.9    |
| 37.5° | 4.1    |
| 40°   | 4.1    |
| 42.5° | 3.3    |
| 45°   | 2.4    |
| 47.5° | 1.6    |
| 50°   | 1.6    |
| 52.5° | 0.8    |
| 55°   | 0.8    |
| 57.5° | 0.8    |
| 60°   | 0.8    |
| 62.5° | 0.8    |
| 65°   | 0.8    |
| 67.5° | 0.8    |
| 70°   | 0.0    |
| 72.5° | 0.0    |
| 75°   | 0.0    |
| 77.5° | 0.0    |
| 80°   | 0.0    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |

(END OF REPORT)