

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1261366

Luminaire Tested: P3AS02R129727DE010 E3DL1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1261366
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-3)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R129727DE010 E3DL1LI
Description: 3in Adjustable LED luminaire with, R12 optic, 2700K CCT AND, 97CRI , E3DL1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 209.0 lumens
Efficiency: N/A
Efficacy: 56.5 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.43
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1261366

CATALOG NUMBER: P3AS02R129727DE010 E3DL1LI

Luminous Intensity Polar Plot

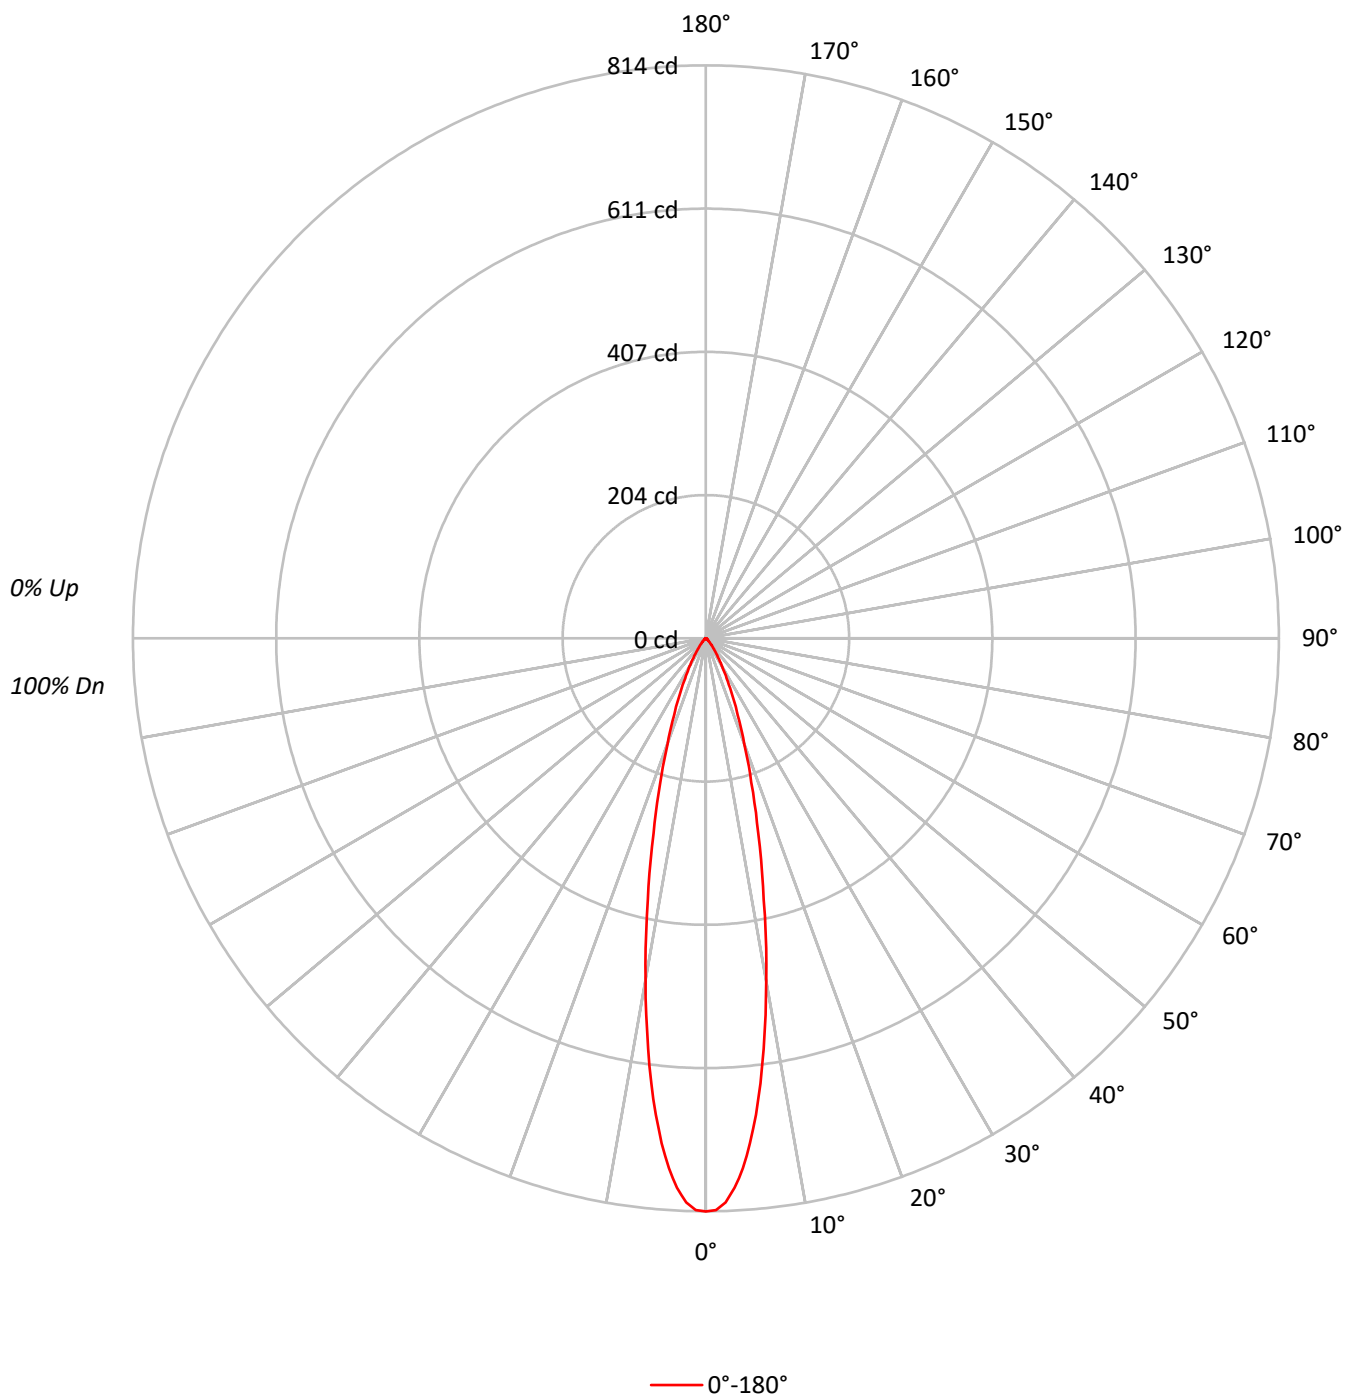

TEST NUMBER: P1261366

CATALOG NUMBER: P3AS02R129727DE010 E3DL1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	112	110	108		112	110	108	106		106	104	103		102	101	100		99	98	97
2	110	106	103	100		108	104	101	99		101	99	97		98	96	95		96	94	93
3	106	101	97	93		104	99	96	93		97	94	91		94	92	90		92	90	88
4	102	96	92	88		100	95	91	88		93	89	87		91	88	86		89	87	85
5	98	92	87	84		97	91	87	83		89	86	83		88	84	82		86	83	81
6	95	88	83	80		94	87	83	80		86	82	79		85	81	79		83	80	78
7	92	85	80	77		91	84	80	76		83	79	76		82	78	76		81	78	75
8	89	81	77	74		88	81	77	73		80	76	73		79	76	73		78	75	73
9	86	79	74	71		85	78	74	71		77	73	71		77	73	70		76	73	70
10	84	76	71	68		83	76	71	68		75	71	68		74	71	68		74	70	68

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	178538
5°	158485
10°	110063
15°	65086
20°	37080
25°	21195
30°	11723
35°	6264
40°	3464
45°	1861
50°	1160
55°	918
60°	789
65°	726
70°	641
75°	678
80°	505
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1861 cd/sqm

TEST NUMBER: P1261366

CATALOG NUMBER: P3AS02R129727DE010 E3DL1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	61.2	29.3
10°-20°	80.8	38.7
20°-30°	41.6	19.9
30°-40°	15.6	7.5
40°-50°	5.1	2.4
50°-60°	2.2	1.0
60°-70°	1.4	0.7
70°-80°	0.8	0.4
80°-90°	0.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	183.6	87.9
0°-40°	199.3	95.4
0°-60°	206.5	98.8
0°-90°	209.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	209.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	814	
5°	720	61
15°	287	81
25°	88	42
35°	23	16
45°	6	5
55°	2	2
65°	1	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1261366

CATALOG NUMBER: P3AS02R129727DE010 E3DL1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	814.2
1°	812.6
2°	801.9
3°	781.6
4°	754.8
5°	720.0
6°	680.5
7°	637.2
8°	589.1
9°	541.6
10°	494.3
12.5°	380.3
15°	286.7
17.5°	214.6
20°	158.9
22.5°	118.6
25°	87.6
27.5°	63.8
30°	46.3
32.5°	32.8
35°	23.4
37.5°	16.7
40°	12.1
42.5°	8.7
45°	6.0
47.5°	4.4
50°	3.4
52.5°	2.8
55°	2.4
57.5°	2.0
60°	1.8
62.5°	1.6
65°	1.4
67.5°	1.2
70°	1.0
72.5°	1.0
75°	0.8
77.5°	0.6
80°	0.4
82.5°	0.4
85°	0.2
87.5°	0.0
90°	0.0

(END OF REPORT)