

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1261407

Luminaire Tested: P3AS02R159727DE010 E3DLP1WH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1261407
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-3)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R159727DE010 E3DLP1WH
Description: 3in Adjustable LED luminaire with, R15 optic, 2700K CCT AND, 97CRI , E3DLP1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 212.0 lumens
Efficiency: N/A
Efficacy: 58.9 lumens/watt
Spacing Criteria (0/90/45): 0.4 / 0.4 / 0.43
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1261407

CATALOG NUMBER: P3AS02R159727DE010 E3DLP1WH

Luminous Intensity Polar Plot

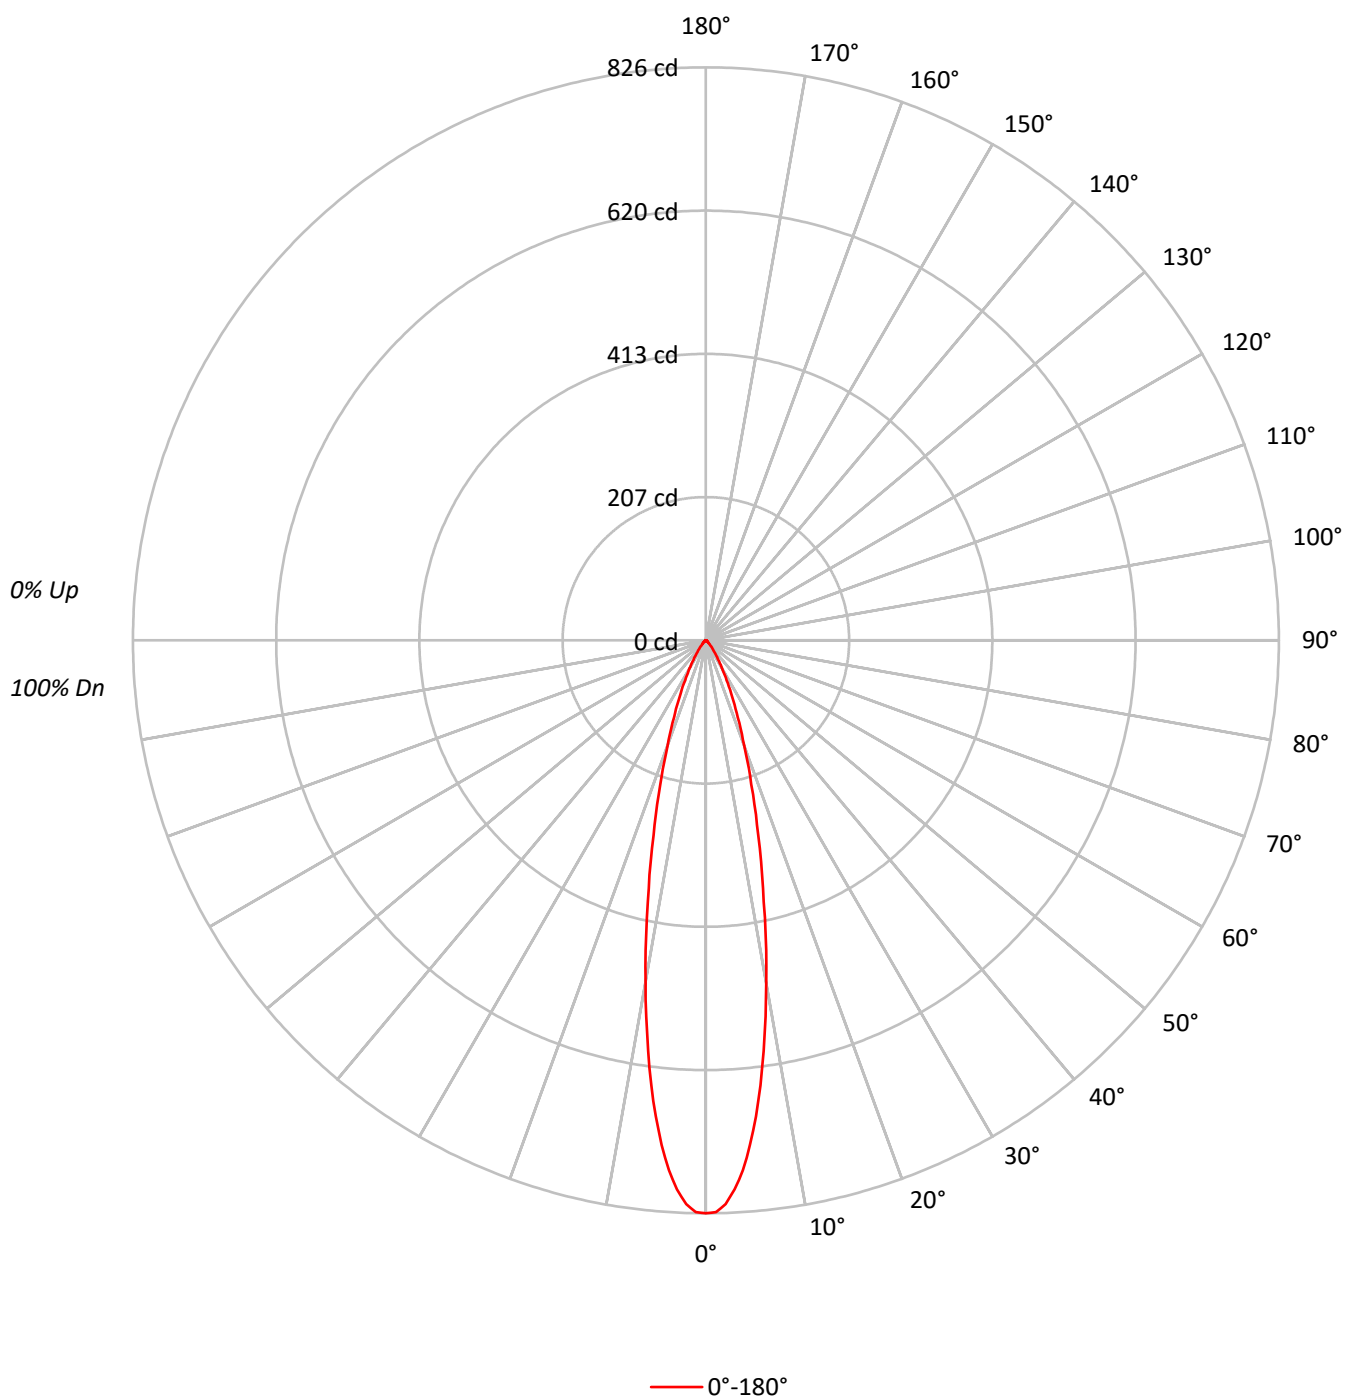

TEST NUMBER: P1261407

CATALOG NUMBER: P3AS02R159727DE010 E3DLP1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99
2	110	106	103	100	108	104	101	99	101	99	97		98	96	95		96
3	106	101	97	93	104	99	96	93	97	94	91		94	92	90		92
4	102	96	92	88	100	95	91	88	93	89	87		91	88	86		89
5	98	92	87	84	97	91	87	83	89	86	83		88	84	82		86
6	95	88	83	80	94	87	83	80	86	82	79		85	81	79		83
7	92	85	80	77	91	84	80	76	83	79	76		82	78	76		81
8	89	81	77	74	88	81	77	73	80	76	73		79	76	73		78
9	86	79	74	71	85	78	74	71	77	73	71		77	73	70		76
10	84	76	71	68	83	76	71	68	75	71	68		74	71	68		74

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	181104
5°	160752
10°	111643
15°	66016
20°	37593
25°	21485
30°	11901
35°	6344
40°	3521
45°	1892
50°	1194
55°	956
60°	789
65°	726
70°	641
75°	678
80°	505
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1892 cd/sqm

TEST NUMBER: P1261407

CATALOG NUMBER: P3AS02R159727DE010 E3DLP1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	62.1	29.3
10°-20°	82.0	38.7
20°-30°	42.2	19.9
30°-40°	15.9	7.5
40°-50°	5.2	2.4
50°-60°	2.2	1.1
60°-70°	1.4	0.7
70°-80°	0.8	0.4
80°-90°	0.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	186.3	87.9
0°-40°	202.1	95.4
0°-60°	209.6	98.9
0°-90°	212.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	212.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	826	
5°	730	62
15°	291	82
25°	89	42
35°	24	16
45°	6	5
55°	2	2
65°	1	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1261407

CATALOG NUMBER: P3AS02R159727DE010 E3DLP1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	825.9
1°	824.3
2°	813.4
3°	792.8
4°	765.7
5°	730.3
6°	690.3
7°	646.4
8°	597.6
9°	549.4
10°	501.4
12.5°	385.8
15°	290.8
17.5°	217.7
20°	161.1
22.5°	120.3
25°	88.8
27.5°	64.7
30°	47.0
32.5°	33.3
35°	23.7
37.5°	17.0
40°	12.3
42.5°	8.8
45°	6.1
47.5°	4.5
50°	3.5
52.5°	2.9
55°	2.5
57.5°	2.0
60°	1.8
62.5°	1.6
65°	1.4
67.5°	1.2
70°	1.0
72.5°	1.0
75°	0.8
77.5°	0.6
80°	0.4
82.5°	0.4
85°	0.2
87.5°	0.0
90°	0.0

(END OF REPORT)