

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1261412

Luminaire Tested: P3AS02R209727DE010 E3CB1MB

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1261412
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R209727DE010 E3CB1MB
Description: 3in Adjustable LED luminaire with, R20 optic, 2700K CCT AND, 97CRI , E3CB1MB TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 258.0 lumens
Efficiency: N/A
Efficacy: 71.7 lumens/watt
Spacing Criteria (0/90/45): 0.35 / 0.35 / 0.34
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1261412
CATALOG NUMBER: P3AS02R209727DE010 E3CB1MB

Luminous Intensity Polar Plot

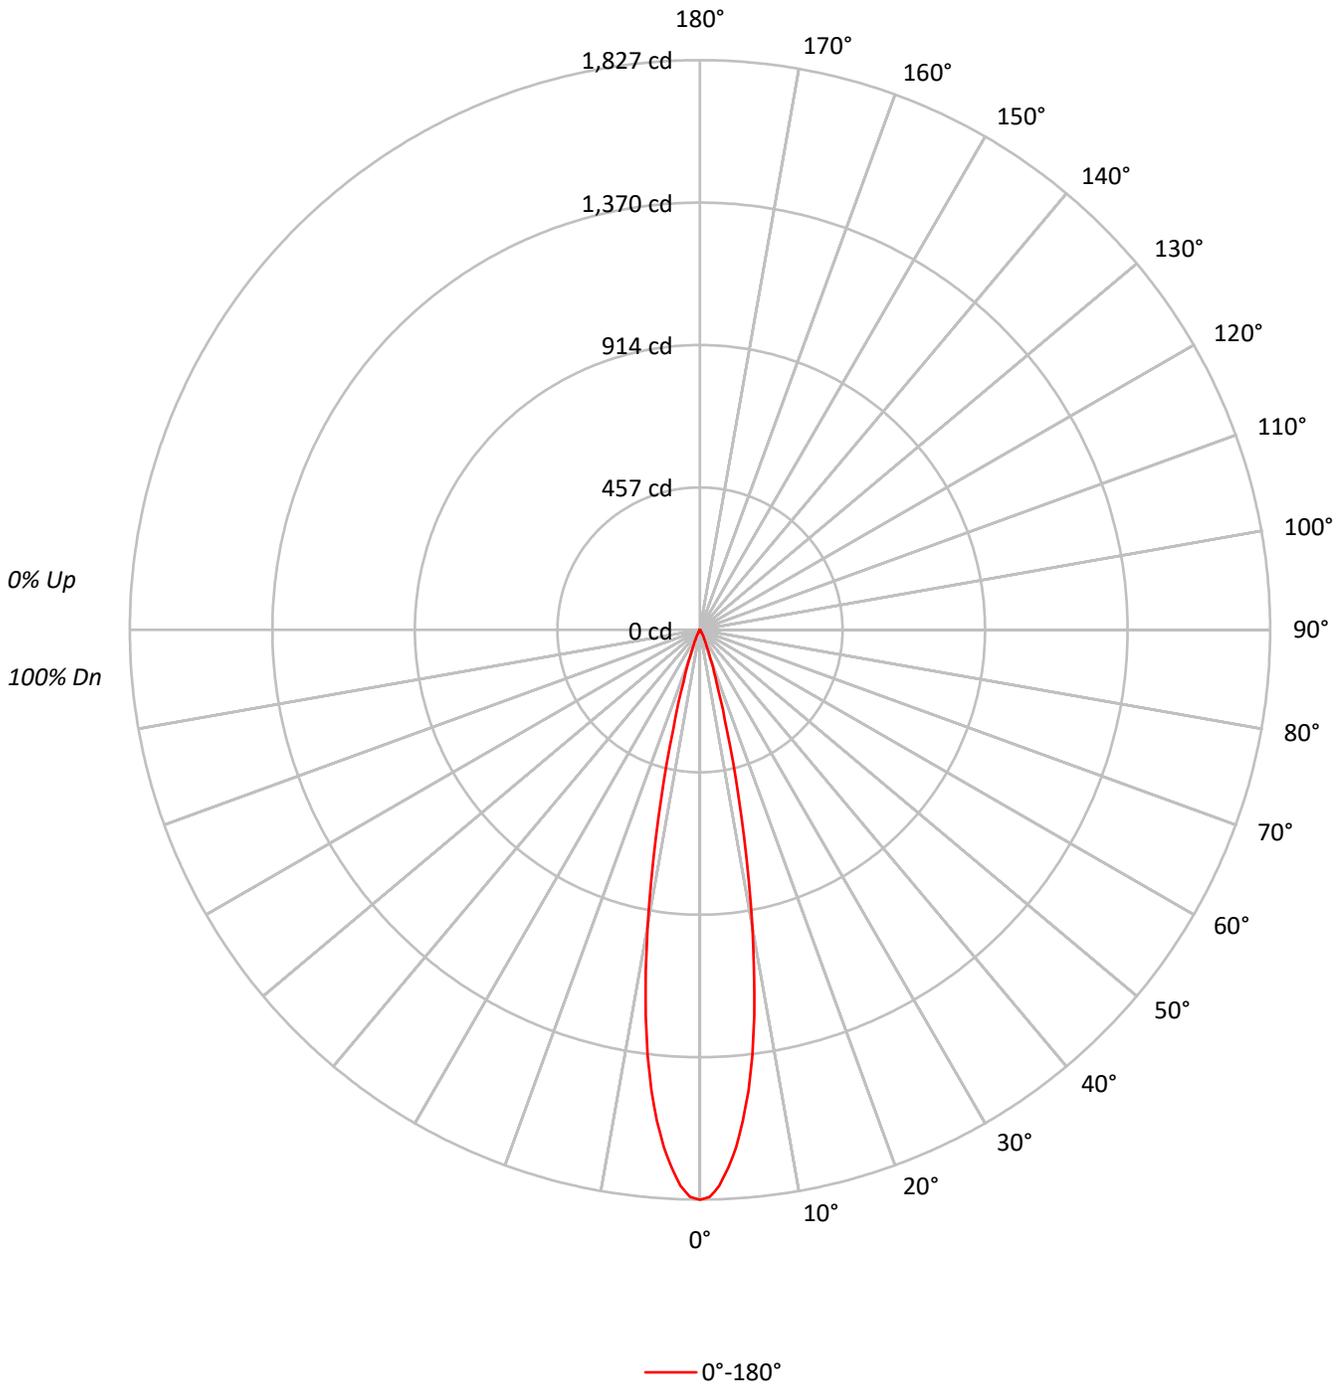



TEST NUMBER: P1261412
 CATALOG NUMBER: P3AS02R209727DE010 E3CB1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100
1	116	114	112	110	113	112	110	109	108	106	105	104	103	102	101	100	99	98	98	98
2	112	109	107	104	110	108	105	103	104	103	101	102	100	99	99	98	97	97	97	95
3	109	105	102	100	108	104	101	99	102	99	97	99	98	96	97	96	95	95	95	93
4	107	102	99	96	105	101	98	96	99	97	95	97	95	93	96	94	92	92	92	91
5	104	99	96	93	103	98	95	93	97	94	92	95	93	91	94	92	91	91	91	90
6	102	97	93	91	101	96	93	90	95	92	90	94	91	89	93	90	89	89	89	88
7	100	94	91	88	99	94	91	88	93	90	88	92	89	87	91	89	87	87	87	86
8	98	92	89	86	97	92	89	86	91	88	86	90	88	86	89	87	85	85	85	85
9	96	90	87	85	95	90	87	85	89	86	84	89	86	84	88	86	84	84	84	83
10	94	89	85	83	93	88	85	83	88	85	83	87	84	83	87	84	82	82	82	82

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	400714
5°	347787
10°	214892
15°	74643
20°	22915
25°	8105
30°	2988
35°	1205
40°	630
45°	248
50°	136
55°	153
60°	175
65°	104
70°	128
75°	169
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 248 cd/sqm



TEST NUMBER: P1261412
 CATALOG NUMBER: P3AS02R209727DE010 E3CB1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	131.1	50.8
10°-20°	104.0	40.3
20°-30°	18.0	7.0
30°-40°	3.3	1.3
40°-50°	0.7	0.3
50°-60°	0.4	0.1
60°-70°	0.2	0.1
70°-80°	0.2	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	253.2	98.2
0°-40°	256.5	99.4
0°-60°	257.5	99.8
0°-90°	258.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	258.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1827	
5°	1580	131
15°	329	104
25°	34	18
35°	4	3
45°	1	1
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1261412
CATALOG NUMBER: P3AS02R209727DE010 E3CB1MB

CANDELA DISTRIBUTION (FULL):

0°	
0°	1827.4
1°	1818.6
2°	1783.9
3°	1728.1
4°	1662.8
5°	1580.0
6°	1485.3
7°	1375.0
8°	1249.4
9°	1108.3
10°	965.1
12.5°	608.8
15°	328.8
17.5°	175.6
20°	98.2
22.5°	56.2
25°	33.5
27.5°	20.4
30°	11.8
32.5°	6.9
35°	4.5
37.5°	3.1
40°	2.2
42.5°	1.4
45°	0.8
47.5°	0.4
50°	0.4
52.5°	0.4
55°	0.4
57.5°	0.4
60°	0.4
62.5°	0.2
65°	0.2
67.5°	0.2
70°	0.2
72.5°	0.2
75°	0.2
77.5°	0.2
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)