

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1261475

Luminaire Tested: P3AS02R309727DE010 E3CD1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1261475
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-16)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R309727DE010 E3CD1MW
Description: 3in Adjustable LED luminaire with, R30 optic, 2700K CCT AND, 97CRI , E3CD1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 260.0 lumens
Efficiency: N/A
Efficacy: 72.2 lumens/watt
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.47
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1261475

CATALOG NUMBER: P3AS02R309727DE010 E3CD1MW

Luminous Intensity Polar Plot

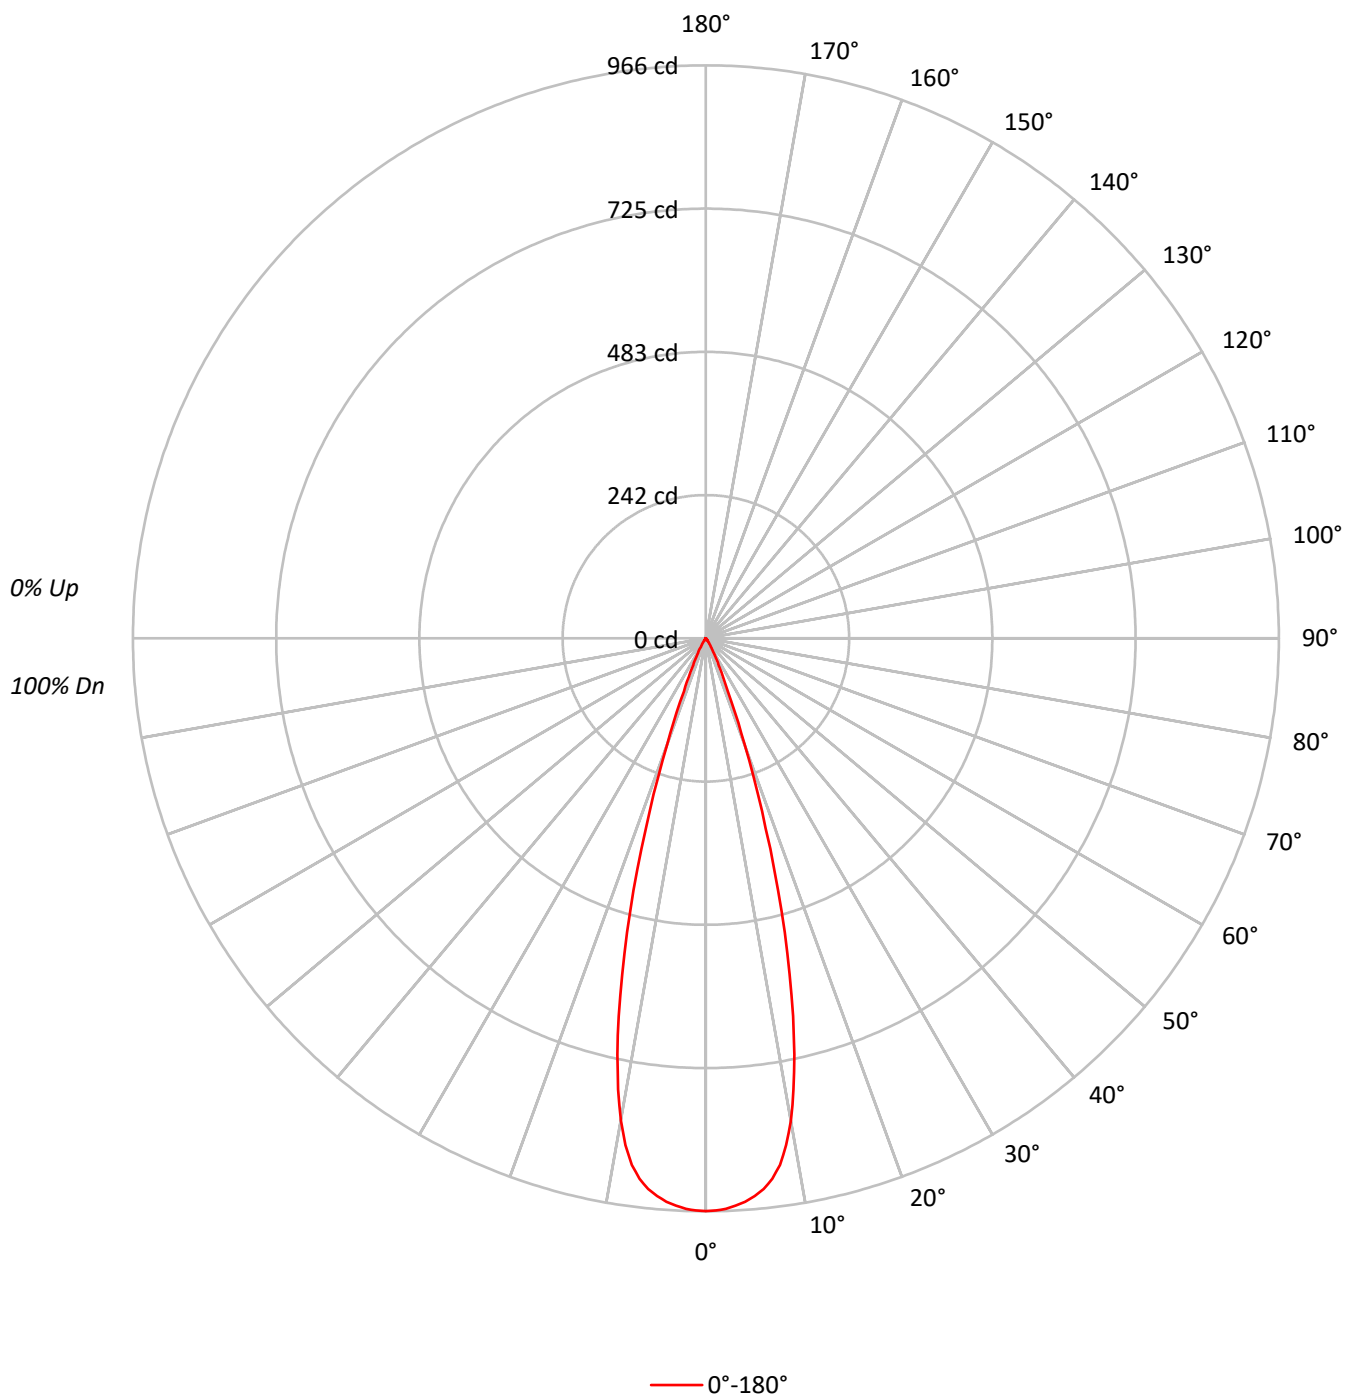

TEST NUMBER: P1261475

CATALOG NUMBER: P3AS02R309727DE010 E3CD1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		0
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		100
1	115	113	111	109	113	111	109	108	107	106	104		103	102	101		97
2	111	108	105	102	109	106	104	101	103	101	99		100	99	97		94
3	108	103	100	97	106	102	99	96	100	97	95		97	95	93		91
4	105	100	96	93	103	99	95	92	97	94	91		95	92	90		88
5	102	96	92	89	100	95	92	89	94	90	88		92	89	87		85
6	99	93	89	86	98	92	88	86	91	88	85		90	87	85		83
7	96	90	86	83	95	89	86	83	88	85	83		87	84	82		81
8	94	87	83	81	93	87	83	80	86	83	80		85	82	80		79
9	91	85	81	78	90	84	81	78	84	80	78		83	80	78		77
10	89	83	79	76	88	82	78	76	82	78	76		81	78	76		75

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	211737
5°	207726
10°	183898
15°	116505
20°	44221
25°	13089
30°	5165
35°	1579
40°	716
45°	248
50°	205
55°	153
60°	175
65°	208
70°	128
75°	169
80°	253
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 80°

Luminance: 253 cd/sqm

TEST NUMBER: P1261475

CATALOG NUMBER: P3AS02R309727DE010 E3CD1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	86.8	33.4
10°-20°	135.2	52.0
20°-30°	31.4	12.1
30°-40°	4.9	1.9
40°-50°	0.8	0.3
50°-60°	0.4	0.1
60°-70°	0.3	0.1
70°-80°	0.2	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	253.3	97.5
0°-40°	258.2	99.3
0°-60°	259.4	99.8
0°-90°	260.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	260.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	966	
5°	944	87
15°	513	135
25°	54	31
35°	6	5
45°	1	1
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1261475

CATALOG NUMBER: P3AS02R309727DE010 E3CD1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	965.6
1°	964.9
2°	962.3
3°	957.8
4°	952.1
5°	943.7
6°	933.3
7°	917.8
8°	896.5
9°	865.3
10°	825.9
11°	775.0
12°	717.6
13°	653.9
14°	583.9
15°	513.2
17.5°	335.7
20°	189.5
22.5°	96.8
25°	54.1
27.5°	33.3
30°	20.4
32.5°	11.0
35°	5.9
37.5°	3.9
40°	2.5
42.5°	1.4
45°	0.8
47.5°	0.6
50°	0.6
52.5°	0.4
55°	0.4
57.5°	0.4
60°	0.4
62.5°	0.4
65°	0.4
67.5°	0.2
70°	0.2
72.5°	0.2
75°	0.2
77.5°	0.2
80°	0.2
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1261475
CATALOG NUMBER: P3AS02R309727DE010 E3CD1MW

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)