

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1261664

Luminaire Tested: P3AS02R609727DE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1261664
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-38)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R609727DE010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R60 optic, 2700K CCT AND, 97CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 168.0 lumens
Efficiency: N/A
Efficacy: 46.7 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1261664

CATALOG NUMBER: P3AS02R609727DE010 E3DLD1WMH

Luminous Intensity Polar Plot

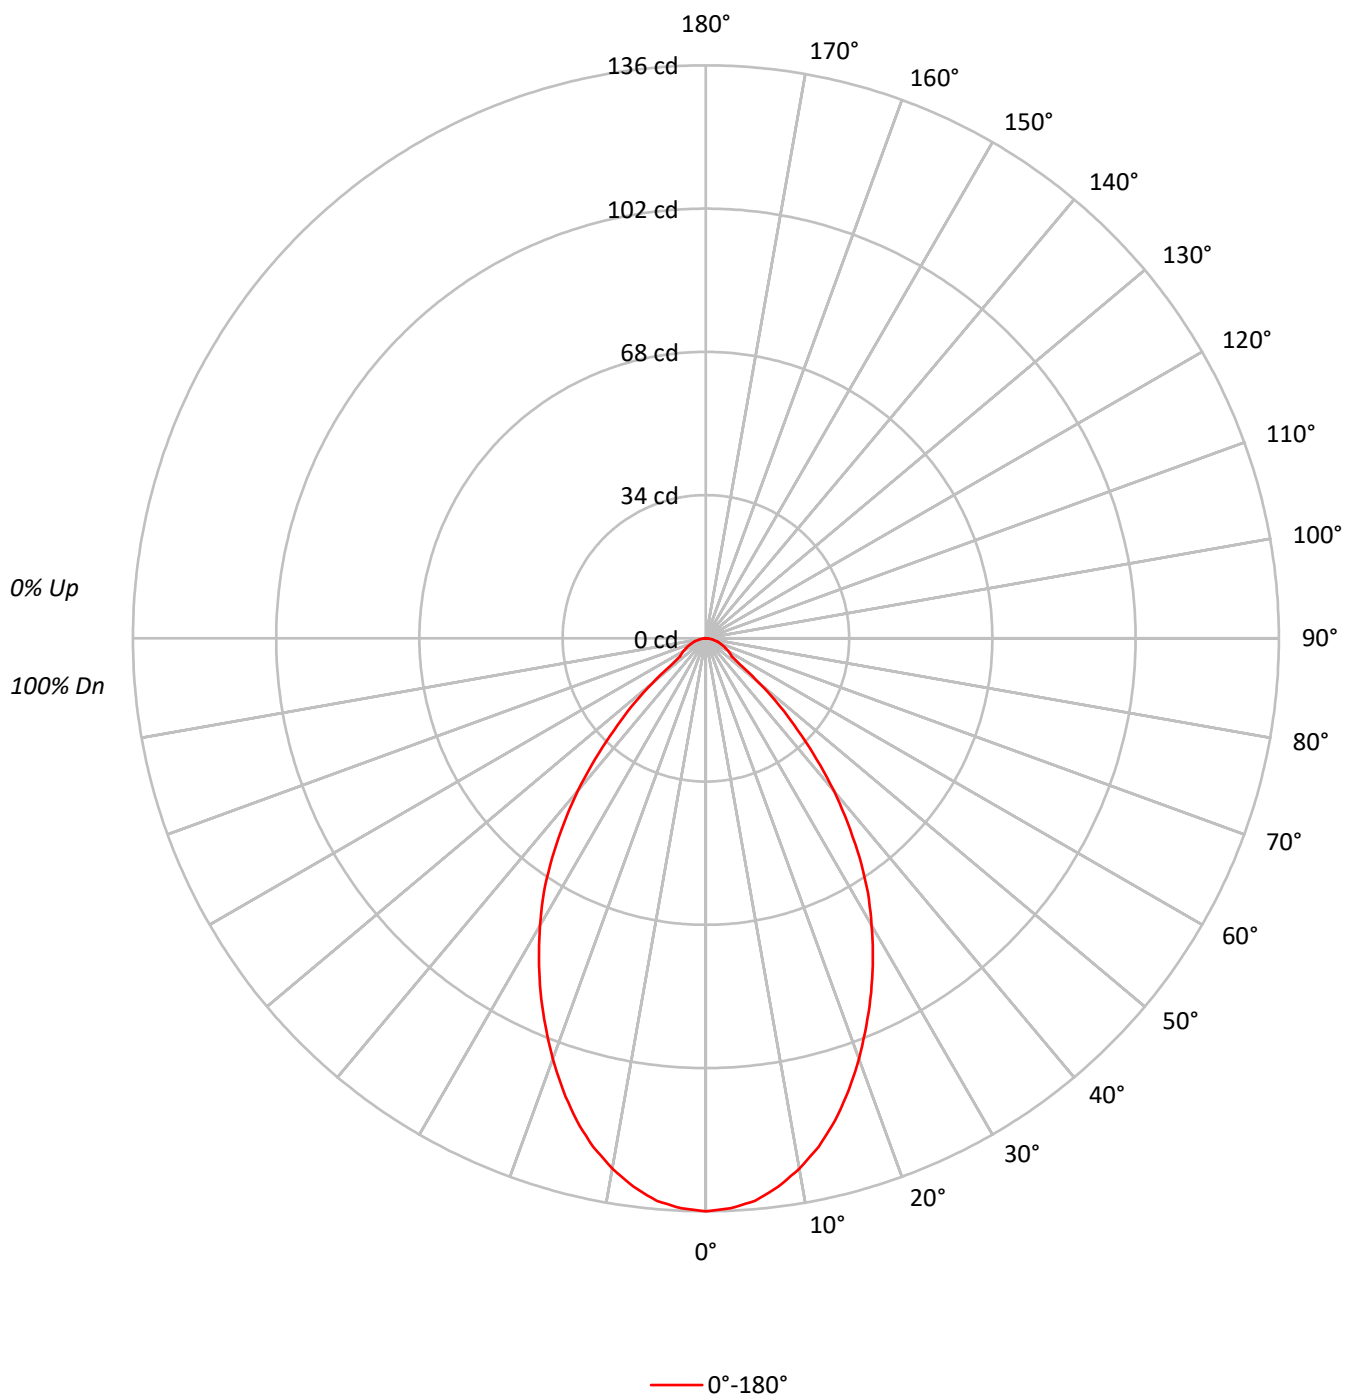

TEST NUMBER: P1261664

CATALOG NUMBER: P3AS02R609727DE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	103	110	107	104	101	102	100	98		99	97	95		95
2	105	99	94	90	103	98	93	89	94	90	87		91	88	85		88
3	99	91	85	80	96	89	84	79	87	82	78		84	80	77		82
4	92	83	77	72	90	82	76	71	80	75	70		78	73	70		76
5	87	77	70	65	85	76	69	65	74	68	64		72	67	63		71
6	82	71	64	59	80	70	64	59	69	63	58		67	62	58		66
7	77	66	59	54	75	65	59	54	64	58	54		63	57	53		61
8	72	61	55	50	71	61	54	50	60	54	49		59	53	49		58
9	68	57	51	46	67	57	50	46	56	50	46		55	49	46		54
10	65	54	47	43	64	53	47	43	52	47	43		52	46	42		51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	29822
5°	29496
10°	28456
15°	26901
20°	24782
25°	22453
30°	19927
35°	17025
40°	13540
45°	9551
50°	5697
55°	2867
60°	2763
65°	2542
70°	2372
75°	2288
80°	2020
85°	1510

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 9551 cd/sqm

TEST NUMBER: P1261664

CATALOG NUMBER: P3AS02R609727DE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	12.6	7.5
10°-20°	33.1	19.7
20°-30°	42.5	25.3
30°-40°	39.4	23.5
40°-50°	24.0	14.3
50°-60°	8.0	4.7
60°-70°	4.9	2.9
70°-80°	2.8	1.6
80°-90°	0.8	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	88.2	52.5
0°-40°	127.6	76.0
0°-60°	159.6	95.0
0°-90°	168.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	168.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	136	
5°	134	13
15°	118	33
25°	93	43
35°	64	39
45°	31	24
55°	8	8
65°	5	5
75°	3	3
85°	1	1
90°	0	

TEST NUMBER: P1261664

CATALOG NUMBER: P3AS02R609727DE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	136.0
2.5°	135.4
5°	134.0
7.5°	131.3
10°	127.8
12.5°	123.6
15°	118.5
17.5°	112.6
20°	106.2
22.5°	99.5
25°	92.8
27.5°	85.8
30°	78.7
32.5°	71.6
35°	63.6
37.5°	55.3
40°	47.3
42.5°	38.9
45°	30.8
47.5°	23.9
50°	16.7
52.5°	10.0
55°	7.5
57.5°	6.9
60°	6.3
62.5°	5.5
65°	4.9
67.5°	4.3
70°	3.7
72.5°	3.1
75°	2.7
77.5°	2.0
80°	1.6
82.5°	1.0
85°	0.6
87.5°	0.4
90°	0.0

(END OF REPORT)