

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1261693

Luminaire Tested: P3AS02R659727DE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1261693
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-42)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R659727DE010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R65 optic, 2700K CCT AND, 97CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 161.0 lumens
Efficiency: N/A
Efficacy: 44.7 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1261693

CATALOG NUMBER: P3AS02R659727DE010 E3DLD1WMH

Luminous Intensity Polar Plot

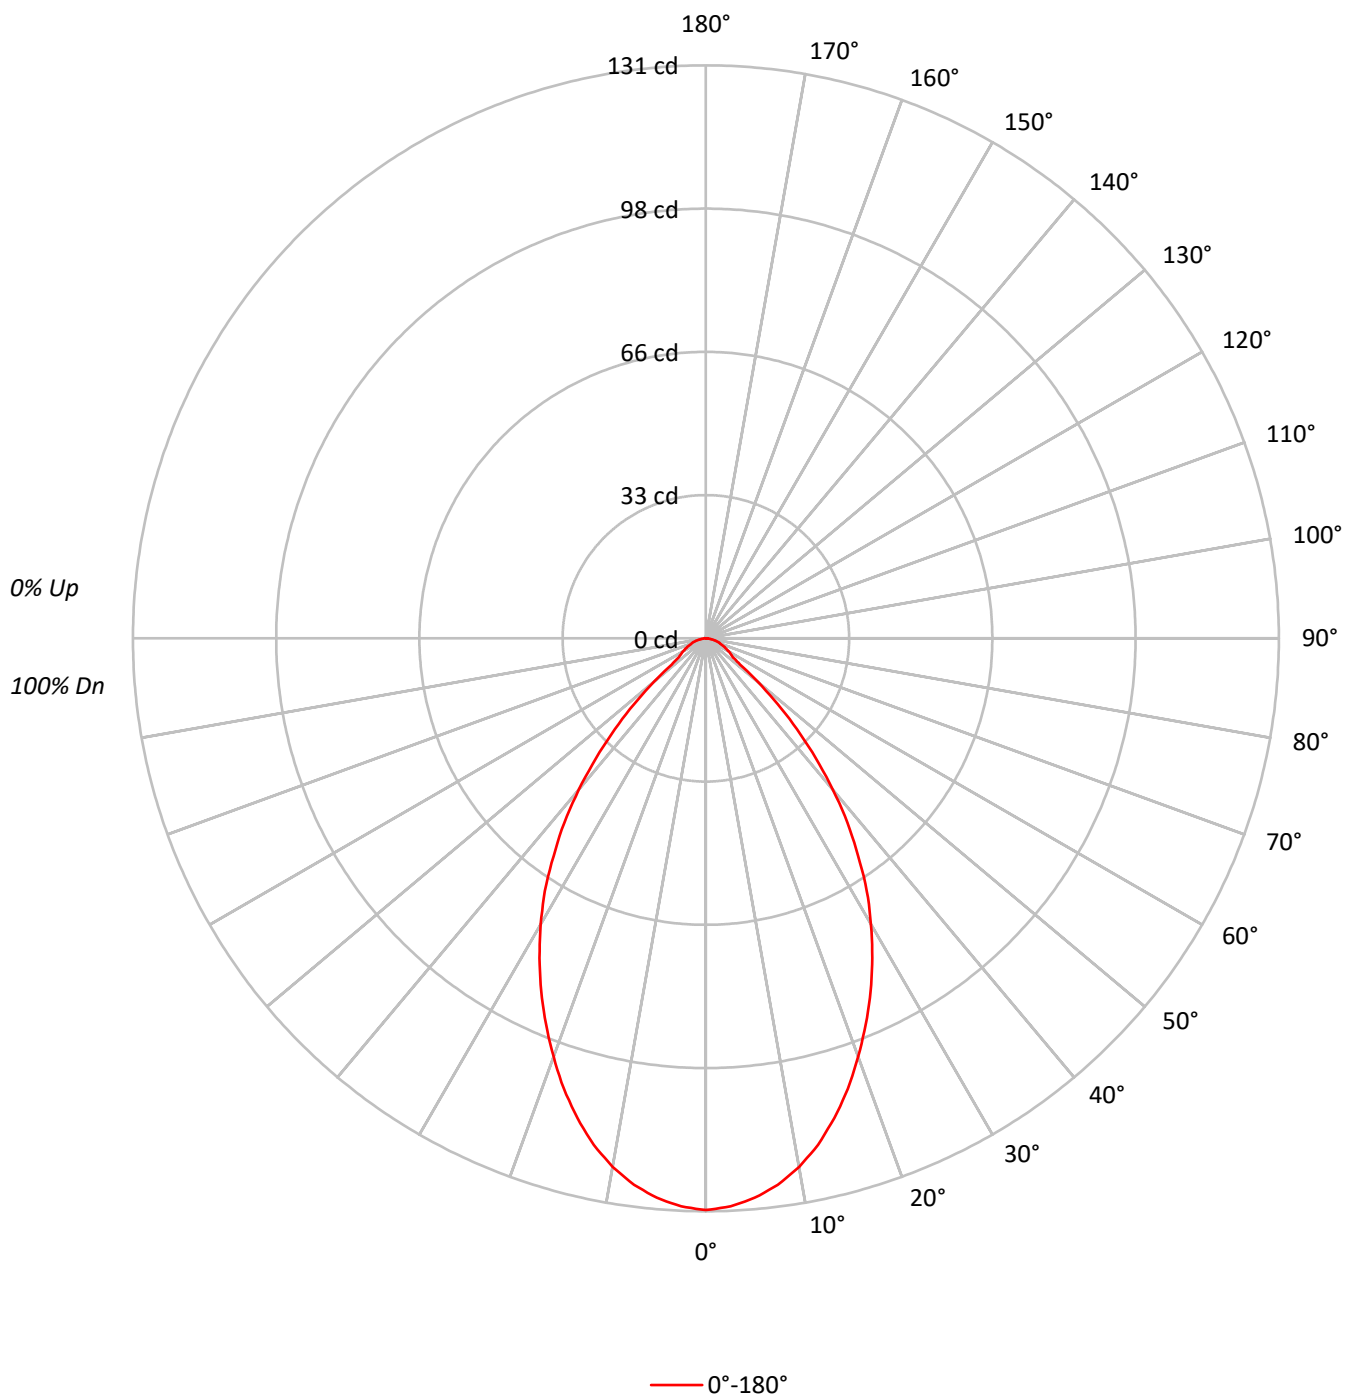

TEST NUMBER: P1261693

CATALOG NUMBER: P3AS02R659727DE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	103	110	107	104	101	102	100	98		99	97	95		95
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88
3	99	91	85	80	96	89	84	79	87	82	78		84	80	77		82
4	92	83	77	72	90	82	76	71	80	75	70		78	73	70		76
5	87	77	70	65	85	76	69	65	74	68	64		72	67	63		71
6	82	71	64	59	80	70	64	59	69	63	58		67	62	58		66
7	77	66	59	54	75	65	59	54	64	58	54		63	57	53		61
8	72	61	55	50	71	61	54	50	60	54	49		59	53	49		58
9	68	57	51	46	67	57	50	46	56	50	46		55	49	46		54
10	65	54	47	43	64	53	47	43	52	47	43		52	46	42		51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	28660
5°	28263
10°	27321
15°	25766
20°	23755
25°	21558
30°	19117
35°	16249
40°	12939
45°	9117
50°	5288
55°	2906
60°	2675
65°	2439
70°	2244
75°	2118
80°	1768
85°	1510

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 9117 cd/sqm

TEST NUMBER: P1261693

CATALOG NUMBER: P3AS02R659727DE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	12.1	7.5
10°-20°	31.8	19.7
20°-30°	40.8	25.3
30°-40°	37.8	23.5
40°-50°	22.8	14.1
50°-60°	7.8	4.8
60°-70°	4.7	2.9
70°-80°	2.6	1.6
80°-90°	0.7	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	84.6	52.6
0°-40°	122.4	76.0
0°-60°	152.9	95.0
0°-90°	161.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	161.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	131	
5°	128	12
15°	114	32
25°	89	41
35°	61	38
45°	29	23
55°	8	8
65°	5	5
75°	2	3
85°	1	1
90°	0	

TEST NUMBER: P1261693

CATALOG NUMBER: P3AS02R659727DE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	130.7
2.5°	130.0
5°	128.4
7.5°	126.0
10°	122.7
12.5°	118.6
15°	113.5
17.5°	108.0
20°	101.8
22.5°	95.5
25°	89.1
27.5°	82.4
30°	75.5
32.5°	68.5
35°	60.7
37.5°	53.2
40°	45.2
42.5°	37.2
45°	29.4
47.5°	22.3
50°	15.5
52.5°	9.8
55°	7.6
57.5°	6.7
60°	6.1
62.5°	5.3
65°	4.7
67.5°	4.1
70°	3.5
72.5°	3.1
75°	2.5
77.5°	2.0
80°	1.4
82.5°	1.0
85°	0.6
87.5°	0.4
90°	0.0

(END OF REPORT)