

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1261698

Luminaire Tested: P3AS02R659727DE010 E3DLP1WH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1261698
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-43)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R659727DE010 E3DLP1WH
Description: 3in Adjustable LED luminaire with, R65 optic, 2700K CCT AND, 97CRI , E3DLP1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 205.0 lumens
Efficiency: N/A
Efficacy: 56.9 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1261698

CATALOG NUMBER: P3AS02R659727DE010 E3DLP1WH

Luminous Intensity Polar Plot

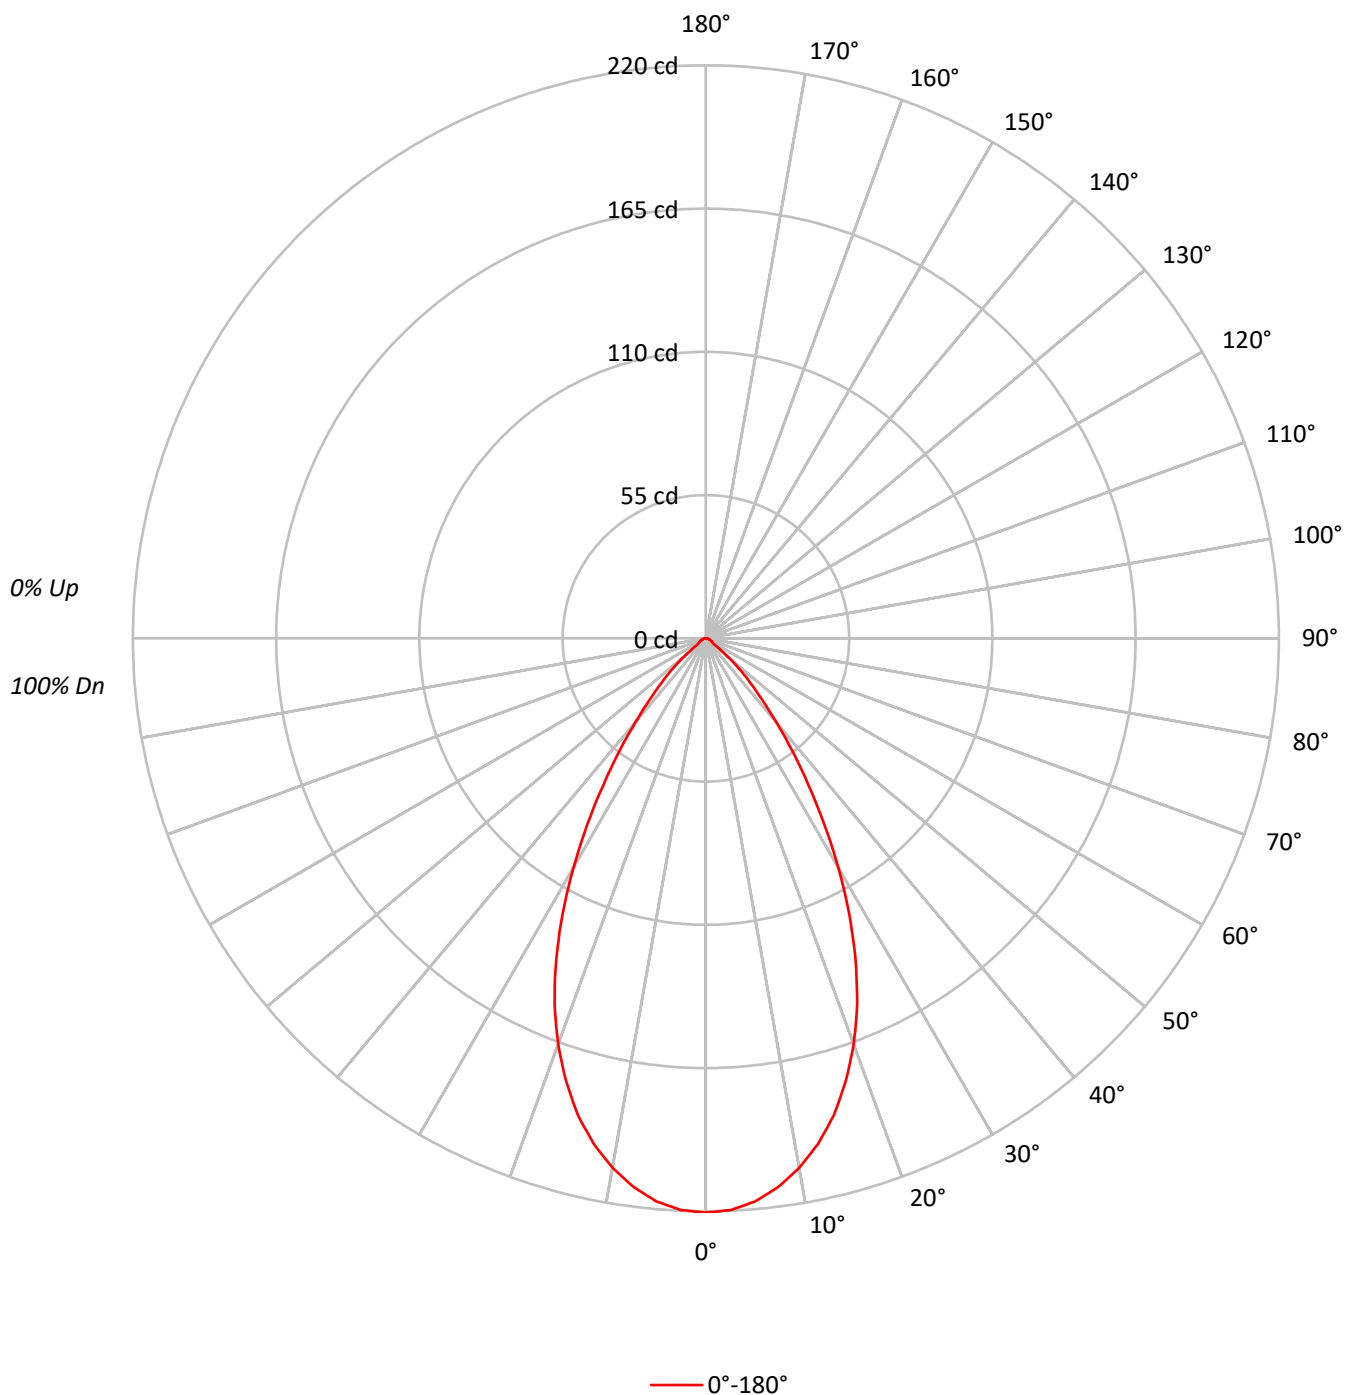

TEST NUMBER: P1261698

CATALOG NUMBER: P3AS02R659727DE010 E3DLP1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	103	104	102	100		100	99	97		97
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		91
3	101	95	89	85	99	93	88	84	90	86	83		88	85	82		86
4	96	88	82	78	94	87	81	77	85	80	76		83	79	75		81
5	91	82	76	71	89	81	75	71	79	74	70		77	73	70		76
6	86	77	70	66	84	76	70	66	74	69	65		73	68	65		72
7	82	72	66	61	80	71	65	61	70	64	61		69	64	60		67
8	77	67	61	57	76	67	61	57	66	60	57		65	60	56		64
9	74	64	57	53	72	63	57	53	62	57	53		61	56	53		60
10	70	60	54	50	69	60	54	50	59	53	50		58	53	50		57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	48351
5°	47766
10°	45958
15°	43042
20°	38713
25°	32881
30°	25725
35°	18337
40°	11994
45°	7412
50°	3753
55°	1338
60°	1184
65°	1141
70°	1026
75°	1017
80°	1010
85°	1006

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 7412 cd/sqm

TEST NUMBER: P1261698

CATALOG NUMBER: P3AS02R659727DE010 E3DLP1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	20.4	9.9
10°-20°	52.8	25.7
20°-30°	61.7	30.1
30°-40°	43.1	21.0
40°-50°	19.0	9.3
50°-60°	4.2	2.1
60°-70°	2.1	1.0
70°-80°	1.3	0.6
80°-90°	0.4	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	134.8	65.8
0°-40°	177.9	86.8
0°-60°	201.2	98.1
0°-90°	205.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	205.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	220	
5°	217	20
15°	190	53
25°	136	62
35°	68	43
45°	24	19
55°	4	4
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1261698

CATALOG NUMBER: P3AS02R659727DE010 E3DLP1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	220.5
2.5°	219.7
5°	217.0
7.5°	212.5
10°	206.4
12.5°	198.8
15°	189.6
17.5°	178.4
20°	165.9
22.5°	151.8
25°	135.9
27.5°	119.1
30°	101.6
32.5°	84.6
35°	68.5
37.5°	54.4
40°	41.9
42.5°	31.7
45°	23.9
47.5°	17.6
50°	11.0
52.5°	5.7
55°	3.5
57.5°	3.1
60°	2.7
62.5°	2.5
65°	2.2
67.5°	1.8
70°	1.6
72.5°	1.4
75°	1.2
77.5°	1.0
80°	0.8
82.5°	0.6
85°	0.4
87.5°	0.2
90°	0.0

(END OF REPORT)