

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1261783

Luminaire Tested: P3AS05R129727DE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1261783
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-2)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R129727DE010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R12 optic, 2700K CCT AND, 97CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 320.0 lumens
Efficiency: N/A
Efficacy: 42.1 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1261783

CATALOG NUMBER: P3AS05R129727DE010 E3DLD1WMH

Luminous Intensity Polar Plot

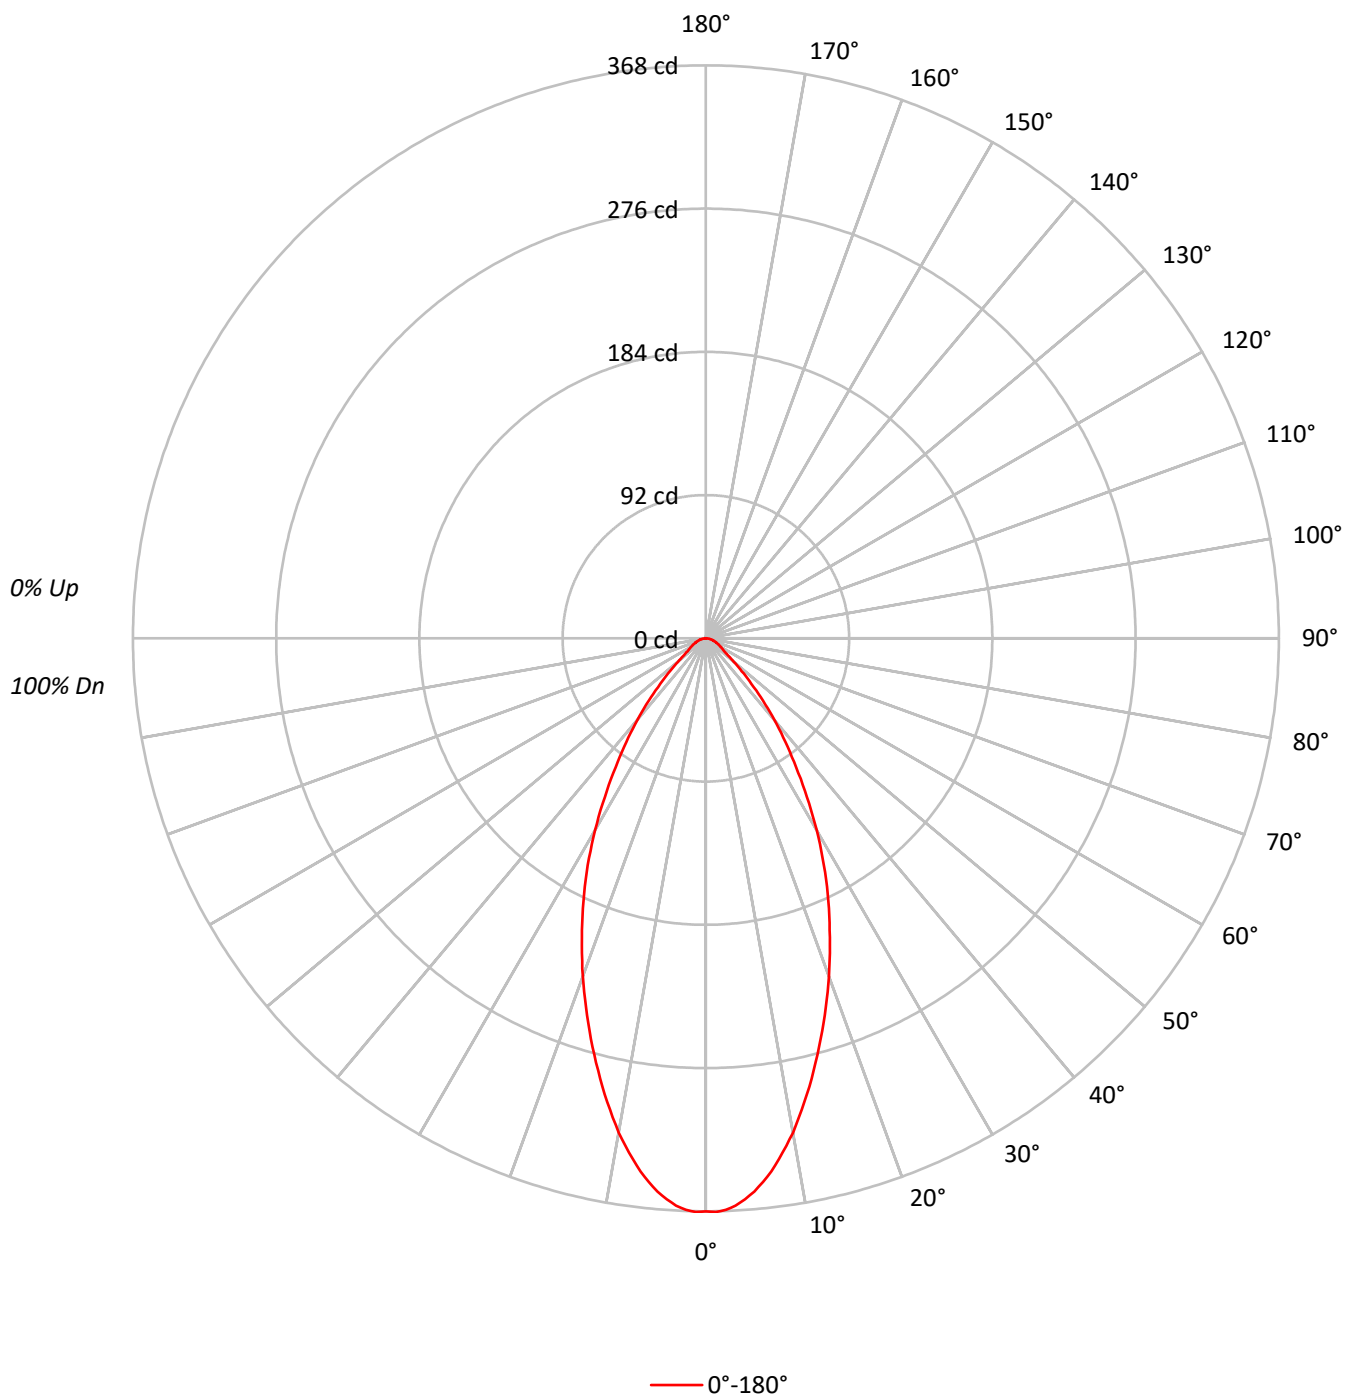

TEST NUMBER: P1261783

CATALOG NUMBER: P3AS05R129727DE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	109	107	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	95	91	95	92	89		92	90	87		90
3	100	93	87	83	98	91	86	82	89	84	81		86	82	79		84
4	94	86	80	75	92	85	79	74	82	77	73		80	76	73		78
5	89	80	73	68	87	79	73	68	77	72	67		75	71	67		74
6	84	74	68	63	83	73	67	63	72	66	62		70	66	62		69
7	80	70	63	58	78	69	63	58	67	62	58		66	61	58		65
8	76	65	59	54	74	65	58	54	63	58	54		62	57	54		61
9	72	61	55	51	71	61	55	51	60	54	50		59	54	50		58
10	68	58	52	48	67	57	51	47	57	51	47		56	51	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	80717
5°	78516
10°	71764
15°	62861
20°	53928
25°	45027
30°	36031
35°	27010
40°	19608
45°	12808
50°	8017
55°	5429
60°	4780
65°	4410
70°	4167
75°	3813
80°	3536
85°	3019

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 12808 cd/sqm

TEST NUMBER: P1261783

CATALOG NUMBER: P3AS05R129727DE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	32.9	10.3
10°-20°	77.2	24.1
20°-30°	85.0	26.6
30°-40°	63.6	19.9
40°-50°	33.0	10.3
50°-60°	13.7	4.3
60°-70°	8.5	2.6
70°-80°	4.8	1.5
80°-90°	1.4	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	195.1	61.0
0°-40°	258.7	80.9
0°-60°	305.4	95.4
0°-90°	320.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	320.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	368	
5°	357	33
15°	277	77
25°	186	85
35°	101	64
45°	41	33
55°	14	14
65°	8	8
75°	4	5
85°	1	1
90°	0	

TEST NUMBER: P1261783

CATALOG NUMBER: P3AS05R129727DE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	368.1
1°	368.5
2°	367.3
3°	364.9
4°	361.2
5°	356.7
6°	351.1
7°	345.0
8°	337.7
9°	330.0
10°	322.3
12.5°	300.0
15°	276.9
17.5°	253.8
20°	231.1
22.5°	208.0
25°	186.1
27.5°	164.2
30°	142.3
32.5°	120.8
35°	100.9
37.5°	83.9
40°	68.5
42.5°	54.3
45°	41.3
47.5°	31.2
50°	23.5
52.5°	17.4
55°	14.2
57.5°	12.6
60°	10.9
62.5°	9.7
65°	8.5
67.5°	7.3
70°	6.5
72.5°	5.3
75°	4.5
77.5°	3.6
80°	2.8
82.5°	2.0
85°	1.2
87.5°	0.4
90°	0.0

(END OF REPORT)