

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1261832

Luminaire Tested: P3AS05R209727DE010 E3D1WH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1261832
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R209727DE010 E3D1WH
Description: 3in Adjustable LED luminaire with, R20 optic, 2700K CCT AND, 97CRI , E3D1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 526.0 lumens
Efficiency: N/A
Efficacy: 73.1 lumens/watt
Spacing Criteria (0/90/45): 0.35 / 0.35 / 0.34
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1261832

CATALOG NUMBER: P3AS05R209727DE010 E3D1WH

Luminous Intensity Polar Plot

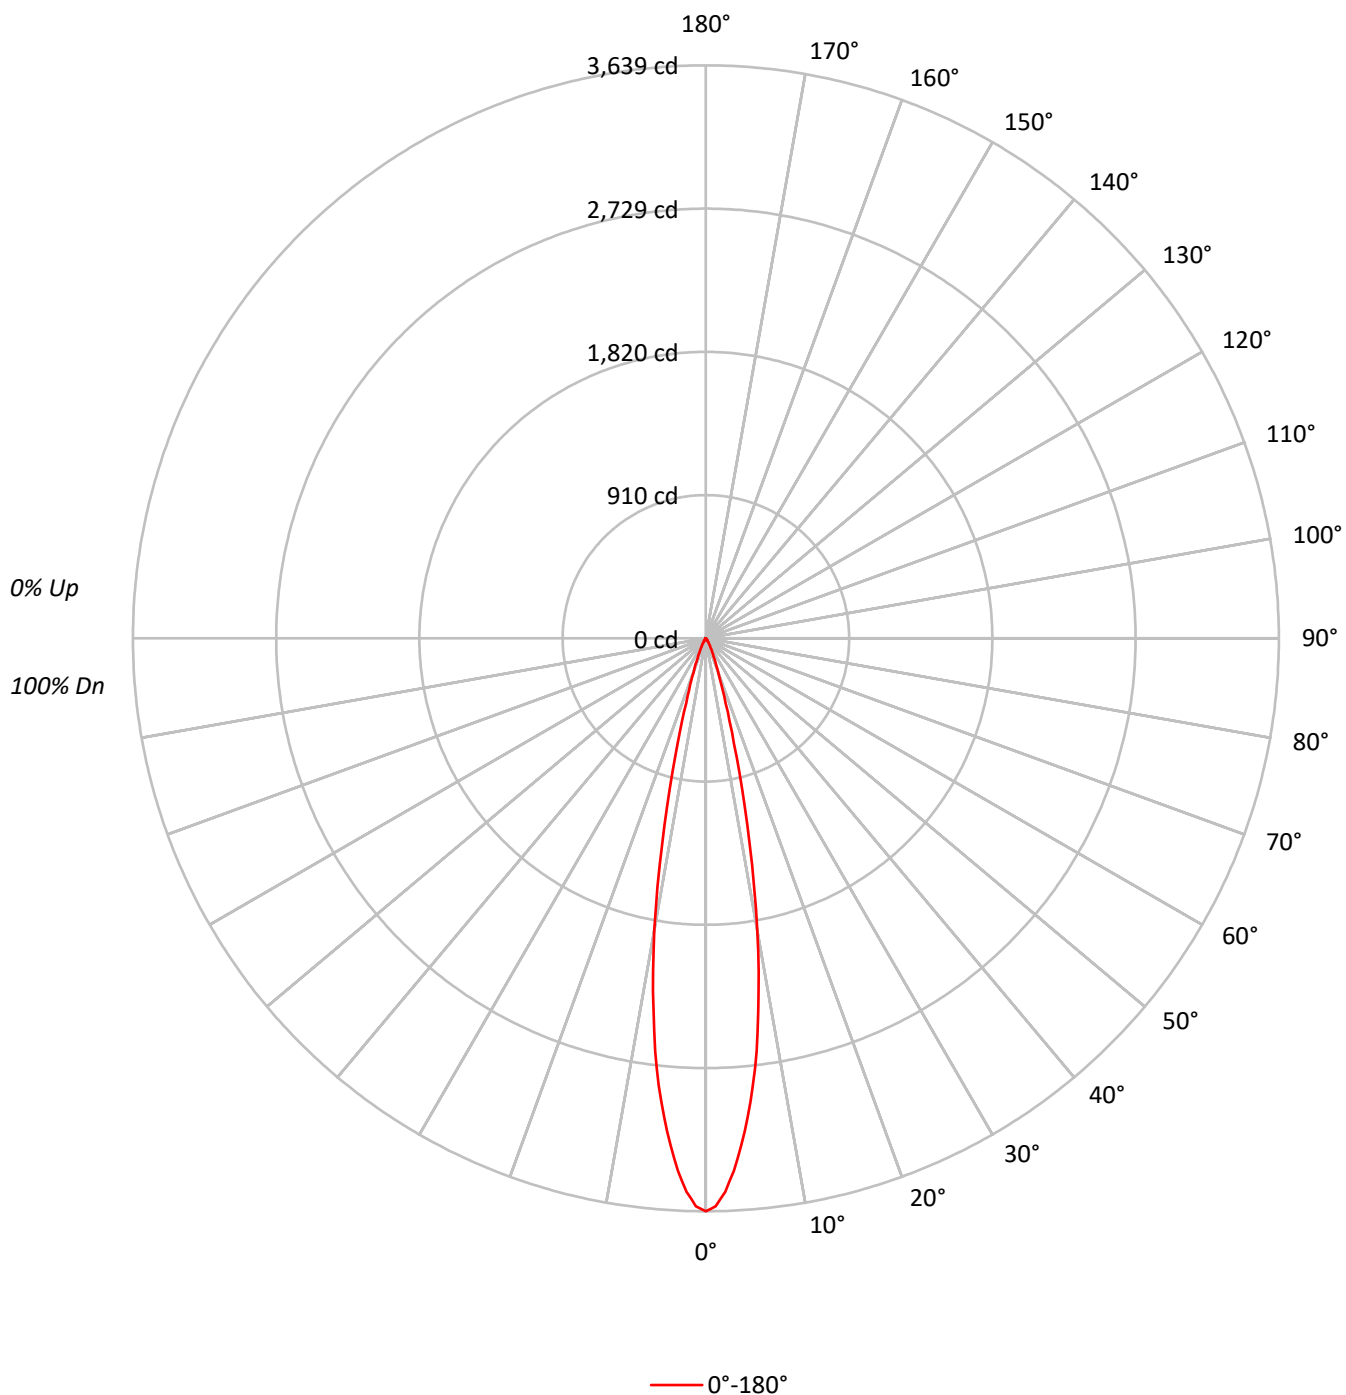

TEST NUMBER: P1261832

CATALOG NUMBER: P3AS05R209727DE010 E3D1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	114	112	110	113	111	110	108	107	106	105		104	103	102		100
2	112	109	106	104	110	107	105	103	104	102	101		101	100	98		99
3	109	105	102	99	107	104	101	98	101	99	97		99	97	95		97
4	106	101	98	95	105	100	97	95	99	96	94		97	95	93		95
5	104	98	95	92	102	98	94	92	96	93	91		95	92	90		93
6	101	96	92	89	100	95	92	89	94	91	89		93	90	88		92
7	99	93	90	87	98	93	89	87	92	89	86		91	88	86		90
8	97	91	87	85	96	91	87	85	90	87	85		89	86	84		88
9	95	89	85	83	94	89	85	83	88	85	83		87	84	83		87
10	93	87	84	81	92	87	83	81	86	83	81		86	83	81		85

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	797897
5°	671801
10°	419587
15°	156868
20°	53835
25°	22453
30°	10559
35°	4738
40°	2233
45°	1147
50°	409
55°	76
60°	88
65°	104
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1147 cd/sqm

TEST NUMBER: P1261832

CATALOG NUMBER: P3AS05R209727DE010 E3D1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	253.8	48.3
10°-20°	209.0	39.7
20°-30°	47.5	9.0
30°-40°	12.1	2.3
40°-50°	3.0	0.6
50°-60°	0.4	0.1
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	510.4	97.0
0°-40°	522.4	99.3
0°-60°	525.8	100.0
0°-90°	526.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	526.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3639	
5°	3052	254
15°	691	209
25°	93	48
35°	18	12
45°	4	3
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1261832

CATALOG NUMBER: P3AS05R209727DE010 E3D1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	3638.7
1°	3607.9
2°	3517.0
3°	3386.6
4°	3226.6
5°	3052.0
6°	2857.4
7°	2642.7
8°	2392.2
9°	2144.0
10°	1884.4
11°	1608.2
12°	1332.5
13°	1098.8
14°	875.5
15°	691.0
16°	545.4
17°	430.2
18°	345.7
19°	281.1
20°	230.7
21°	192.9
22°	161.0
23°	133.9
24°	111.7
25°	92.8
27.5°	60.7
30°	41.7
32.5°	25.7
35°	17.7
37.5°	11.3
40°	7.8
42.5°	5.3
45°	3.7
47.5°	2.5
50°	1.2
52.5°	0.6
55°	0.2
57.5°	0.2
60°	0.2
62.5°	0.2
65°	0.2
67.5°	0.0
70°	0.0
72.5°	0.0



TEST NUMBER: P1261832
CATALOG NUMBER: P3AS05R209727DE010 E3D1WH

CANDELA DISTRIBUTION (continued):

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)