

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1261925

Luminaire Tested: P3AS05R359727DE010 E3DL1WMH

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1261925  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-19)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS05R359727DE010 E3DL1WMH  
Description: 3in Adjustable LED luminaire with, R35 optic, 2700K CCT AND, 97CRI , E3DL1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 441.0 lumens  
Efficiency: N/A  
Efficacy: 61.3 lumens/watt  
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.58  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 7.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1261925  
CATALOG NUMBER: P3AS05R359727DE010 E3DL1WMH

### Luminous Intensity Polar Plot

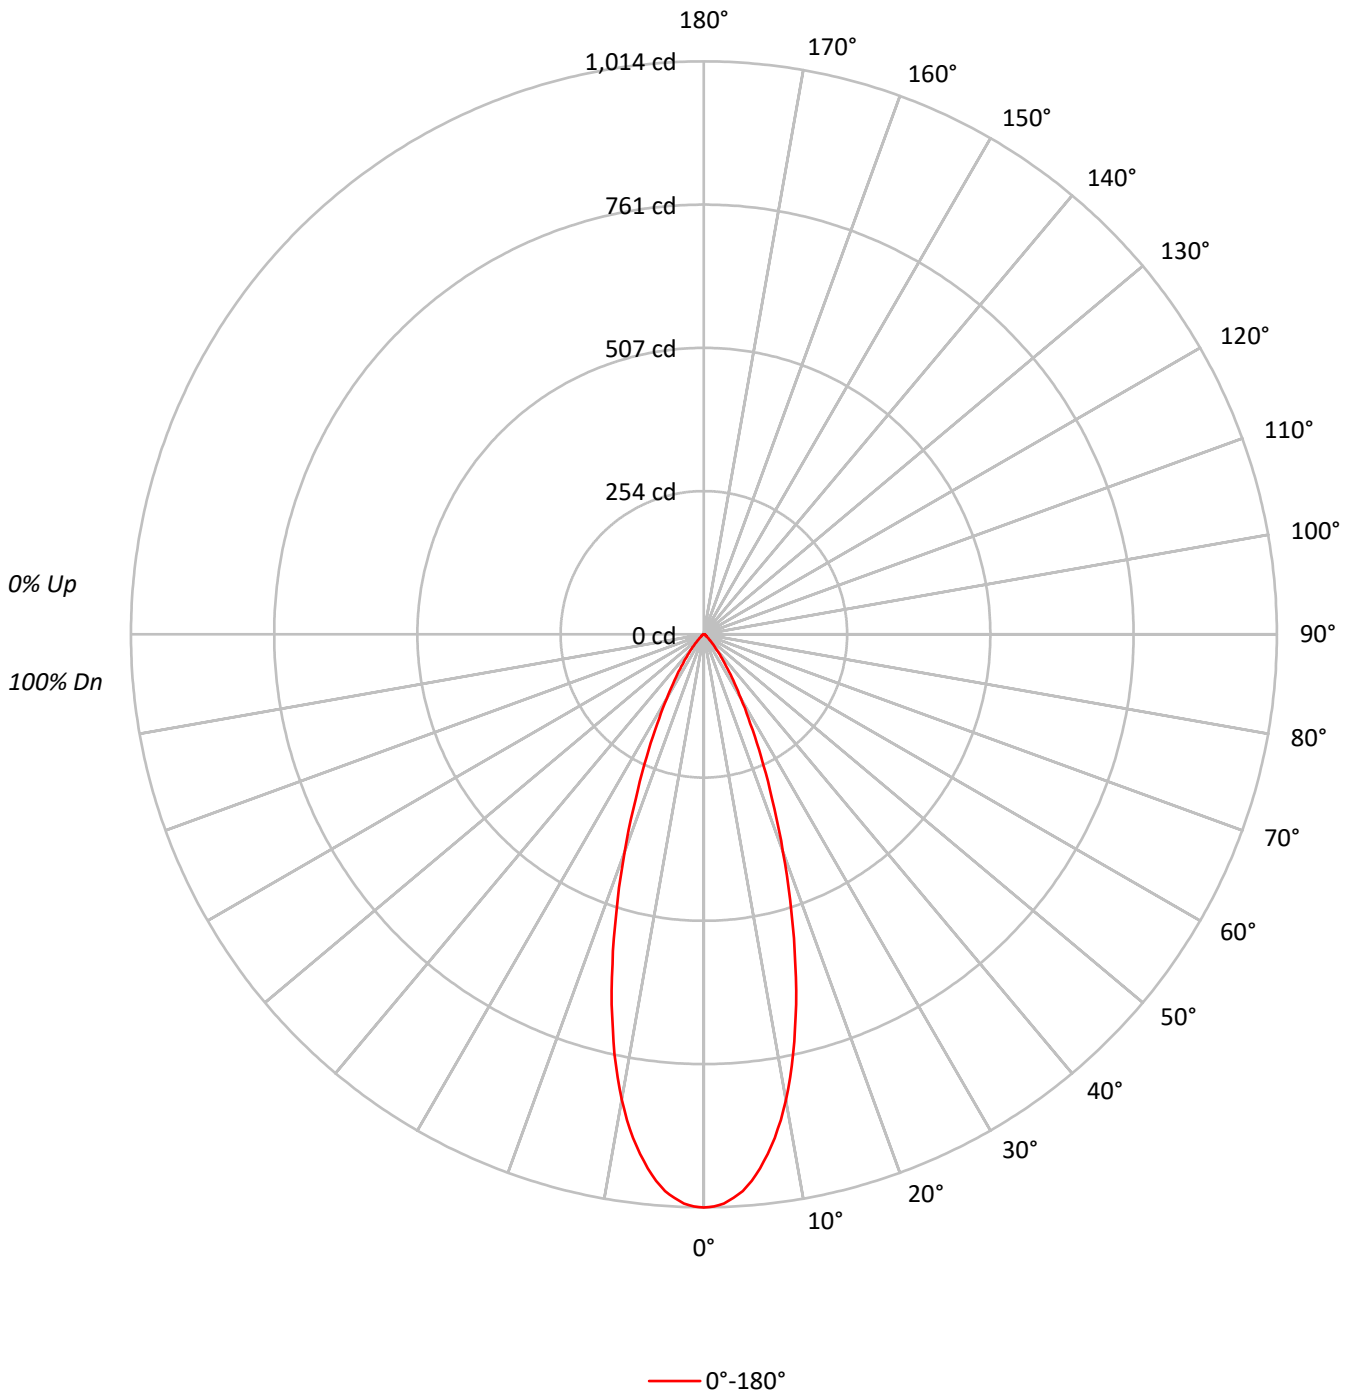



TEST NUMBER: P1261925  
 CATALOG NUMBER: P3AS05R359727DE010 E3DL1WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20					20					20			
RC	80				70				50					30					10	0		
RW	70	50	30	10	70	50	30	10	50	30	10			50	30	10			50	30	10	0
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111			106	106	106			102	102	102	100
1	114	112	109	107	112	109	107	106	105	104	102			102	100	99			98	97	96	95
2	109	105	101	98	107	103	100	97	100	97	95			97	95	93			94	93	91	90
3	105	99	95	91	103	98	94	90	95	92	89			93	90	88			91	88	86	85
4	100	94	89	85	99	93	88	85	91	87	84			89	85	83			87	84	82	80
5	96	89	84	80	95	88	83	80	86	82	79			85	81	78			83	80	78	76
6	92	85	80	76	91	84	79	76	83	78	75			81	77	75			80	77	74	73
7	89	81	76	72	88	80	75	72	79	75	71			78	74	71			77	73	71	70
8	85	77	72	69	84	77	72	68	76	71	68			75	71	68			74	70	68	67
9	82	74	69	66	81	74	69	65	73	68	65			72	68	65			71	68	65	64
10	79	71	66	63	78	71	66	63	70	66	63			69	65	62			69	65	62	61

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	222416
5°	213757
10°	186258
15°	142657
20°	95442
25°	57753
30°	33144
35°	18524
40°	9847
45°	5086
50°	2422
55°	1912
60°	1842
65°	1505
70°	1603
75°	1440
80°	1642
85°	1006

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 5086 cd/sqm



TEST NUMBER: P1261925  
 CATALOG NUMBER: P3AS05R359727DE010 E3DL1WMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	88.4	20.0
10°-20°	171.2	38.8
20°-30°	112.1	25.4
30°-40°	45.5	10.3
40°-50°	13.6	3.1
50°-60°	4.6	1.1
60°-70°	3.1	0.7
70°-80°	1.8	0.4
80°-90°	0.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	371.7	84.3
0°-40°	417.2	94.6
0°-60°	435.5	98.7
0°-90°	441.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	441.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1014	
5°	971	88
15°	628	171
25°	239	112
35°	69	45
45°	16	14
55°	5	5
65°	3	3
75°	2	2
85°	0	1
90°	0	



TEST NUMBER: P1261925  
CATALOG NUMBER: P3AS05R359727DE010 E3DL1WMH

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1014.3
1°	1012.6
2°	1008.0
3°	998.8
4°	987.9
5°	971.1
6°	950.1
7°	926.6
8°	900.2
9°	870.0
10°	836.5
11°	799.1
12°	760.1
13°	716.5
14°	675.0
15°	628.4
17.5°	515.6
20°	409.0
22.5°	314.6
25°	238.7
27.5°	177.9
30°	130.9
32.5°	96.1
35°	69.2
37.5°	49.1
40°	34.4
42.5°	23.9
45°	16.4
47.5°	10.9
50°	7.1
52.5°	5.5
55°	5.0
57.5°	4.6
60°	4.2
62.5°	3.8
65°	2.9
67.5°	2.5
70°	2.5
72.5°	2.1
75°	1.7
77.5°	1.3
80°	1.3
82.5°	0.8
85°	0.4
87.5°	0.4



TEST NUMBER: P1261925  
CATALOG NUMBER: P3AS05R359727DE010 E3DL1WMH

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)