

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1261938

Luminaire Tested: P3AS05R359727DE010 E3PH1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1261938
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-5)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R359727DE010 E3PH1MW
Description: 3in Adjustable LED luminaire with, R35 optic, 2700K CCT AND, 97CRI , E3PH1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 487.0 lumens
Efficiency: N/A
Efficacy: 67.6 lumens/watt
Spacing Criteria (0/90/45): 0.57 / 0.56 / 0.51
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1261938

CATALOG NUMBER: P3AS05R359727DE010 E3PH1MW

Luminous Intensity Polar Plot

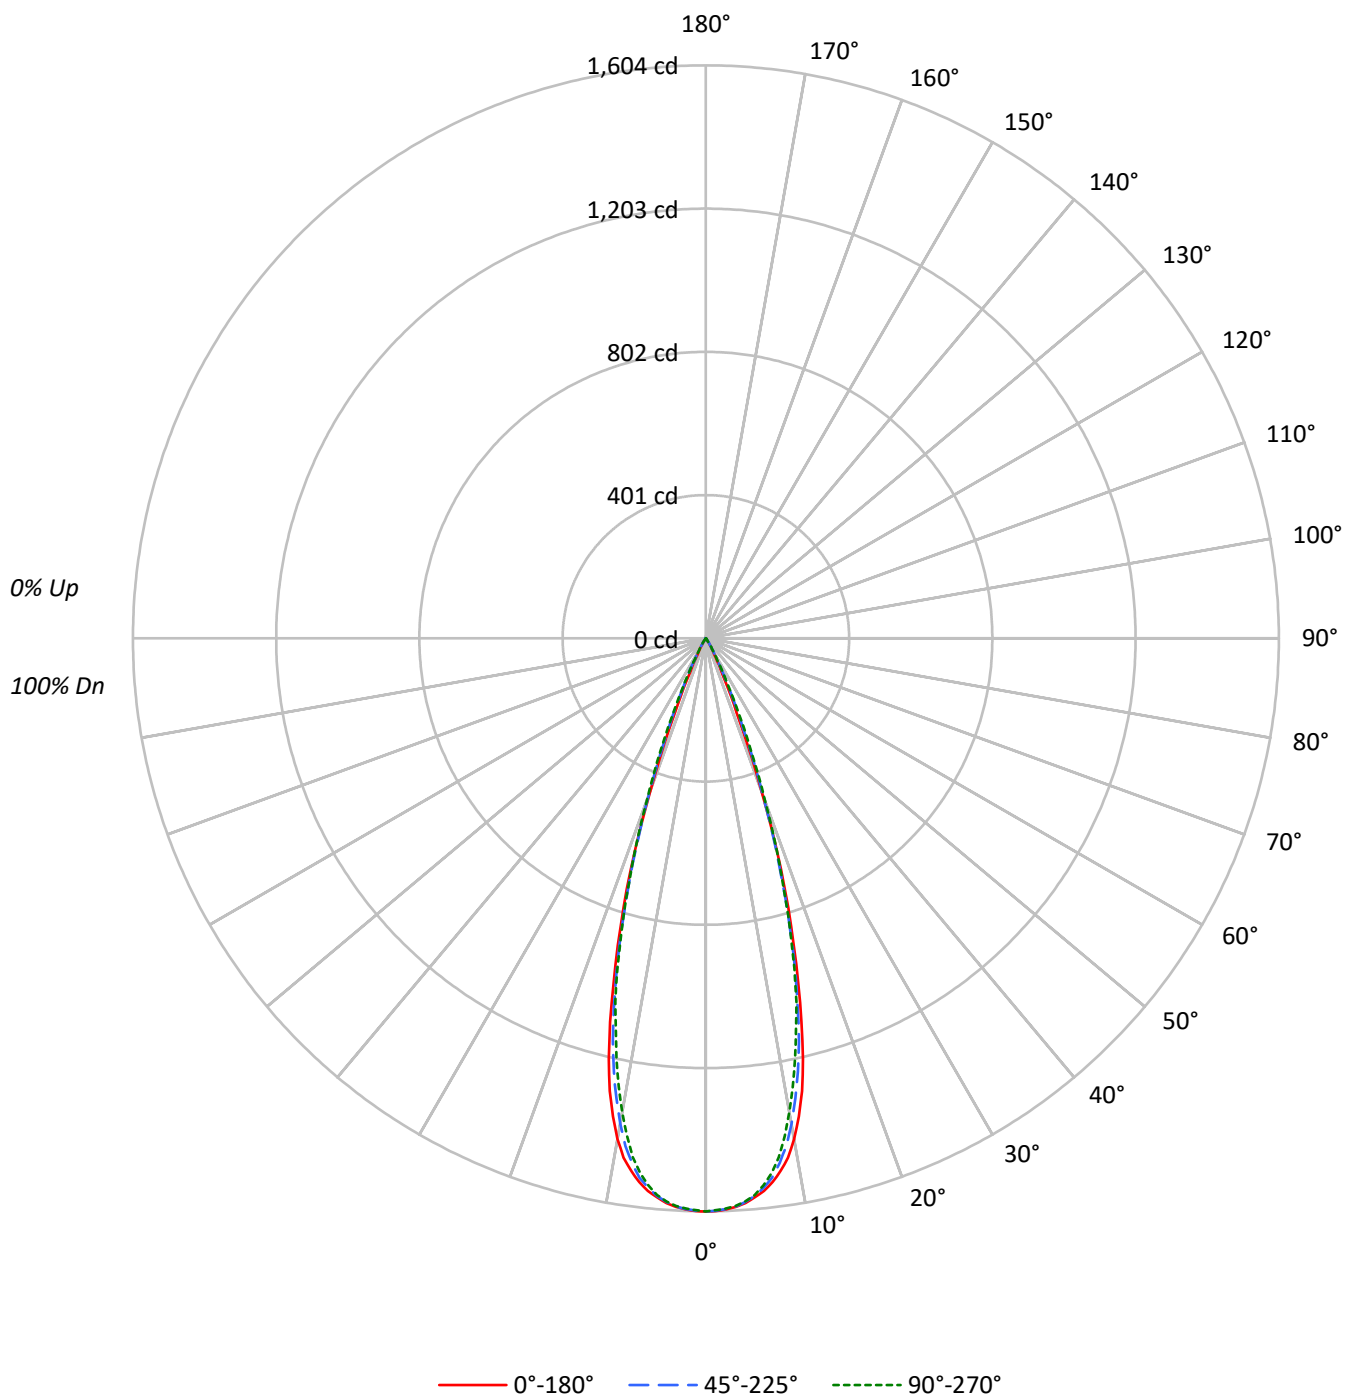

TEST NUMBER: P1261938

CATALOG NUMBER: P3AS05R359727DE010 E3PH1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	98
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	96	95
2	111	108	105	102	109	106	103	101	103	101	99	100	98	97	97	96	95	93	92	91
3	108	103	100	97	106	102	99	96	99	97	94	97	95	93	95	93	92	90	89	87
4	104	99	95	92	103	98	94	92	96	93	91	94	92	90	93	90	89	87	85	82
5	101	95	91	88	100	95	91	88	93	90	87	92	89	87	90	88	86	85	83	81
6	98	92	88	85	97	91	88	85	90	87	84	89	86	84	88	85	83	82	80	77
7	96	89	85	82	94	89	85	82	87	84	81	86	83	81	85	83	81	79	77	75
8	93	86	82	79	92	86	82	79	85	81	79	84	81	79	83	80	78	76	74	73
9	90	84	80	77	89	83	79	77	82	79	76	82	79	76	81	78	76	74	72	70
10	88	81	77	75	87	81	77	74	80	77	74	80	76	74	79	76	74	72	70	68

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	351836	351836	351836
5°	345784	345057	344309
10°	316917	307387	299905
15°	226925	219683	217027
20°	105219	108859	112663
25°	24969	35518	37042
30°	7318	8381	9444
35°	1686	2704	2463
40°	372	716	487
45°	124	124	124
50°	136	0	136
55°	0	0	0
60°	0	0	0
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 52.5°

Luminance: 144 cd/sqm

TEST NUMBER: P1261938

CATALOG NUMBER: P3AS05R359727DE010 E3PH1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	144.0	29.6
10°-20°	257.5	52.9
20°-30°	77.5	15.9
30°-40°	7.4	1.5
40°-50°	0.5	0.1
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	479.0	98.4
0°-40°	486.5	99.9
0°-60°	487.0	100.0
0°-90°	487.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	487.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1604	1604	1604	1604	1604	
5°	1571	1570	1568	1566	1564	146
15°	1000	992	968	964	956	264
25°	103	114	147	153	153	66
35°	6	8	10	11	9	6
45°	0	0	0	0	0	0
55°	0	0	0	0	0	0
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	

TEST NUMBER: P1261938

CATALOG NUMBER: P3AS05R359727DE010 E3PH1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1604.5	1604.5	1604.5	1604.5	1604.5
1°	1603.7	1603.7	1602.8	1602.8	1601.1
2°	1599.9	1600.3	1598.6	1598.2	1596.9
3°	1594.0	1592.8	1592.8	1591.9	1591.1
4°	1584.8	1582.3	1581.4	1581.8	1580.2
5°	1570.9	1570.5	1567.6	1565.5	1564.2
6°	1555.8	1552.9	1546.6	1541.2	1539.9
7°	1533.2	1526.9	1521.4	1510.1	1508.4
8°	1505.5	1495.4	1483.7	1467.7	1466.9
9°	1471.5	1455.2	1438.8	1417.4	1409.9
10°	1423.3	1408.2	1380.5	1361.6	1346.9
11°	1363.3	1344.4	1312.1	1289.5	1277.3
12°	1295.3	1277.7	1240.0	1219.4	1202.2
13°	1208.1	1193.4	1158.2	1135.5	1122.1
14°	1107.0	1096.1	1062.5	1052.5	1047.9
15°	999.6	992.1	967.7	963.5	956.0
17.5°	735.8	723.2	709.3	711.9	714.4
20°	450.9	468.6	466.5	475.7	482.8
22.5°	224.8	247.5	273.9	289.9	297.8
25°	103.2	113.7	146.8	153.1	153.1
27.5°	52.0	54.5	69.2	70.5	73.8
30°	28.9	31.0	33.1	36.9	37.3
32.5°	14.7	17.2	18.0	20.1	19.3
35°	6.3	8.4	10.1	10.9	9.2
37.5°	2.9	3.8	5.5	5.0	3.8
40°	1.3	1.7	2.5	2.1	1.7
42.5°	0.8	0.8	1.3	0.8	0.8
45°	0.4	0.4	0.4	0.4	0.4
47.5°	0.4	0.4	0.0	0.4	0.4
50°	0.4	0.0	0.0	0.0	0.4
52.5°	0.4	0.0	0.0	0.0	0.4
55°	0.0	0.0	0.0	0.0	0.0
57.5°	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0
62.5°	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0
67.5°	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0
72.5°	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0



TEST NUMBER: P1261938

CATALOG NUMBER: P3AS05R359727DE010 E3PH1MW

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)