

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1262061

Luminaire Tested: P3AS05R609727DE010 E3D1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1262061
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-40)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R609727DE010 E3D1MW
Description: 3in Adjustable LED luminaire with, R60 optic, 2700K CCT AND, 97CRI , E3D1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 542.0 lumens
Efficiency: N/A
Efficacy: 75.3 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.91
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1262061
CATALOG NUMBER: P3AS05R609727DE010 E3D1MW

Luminous Intensity Polar Plot

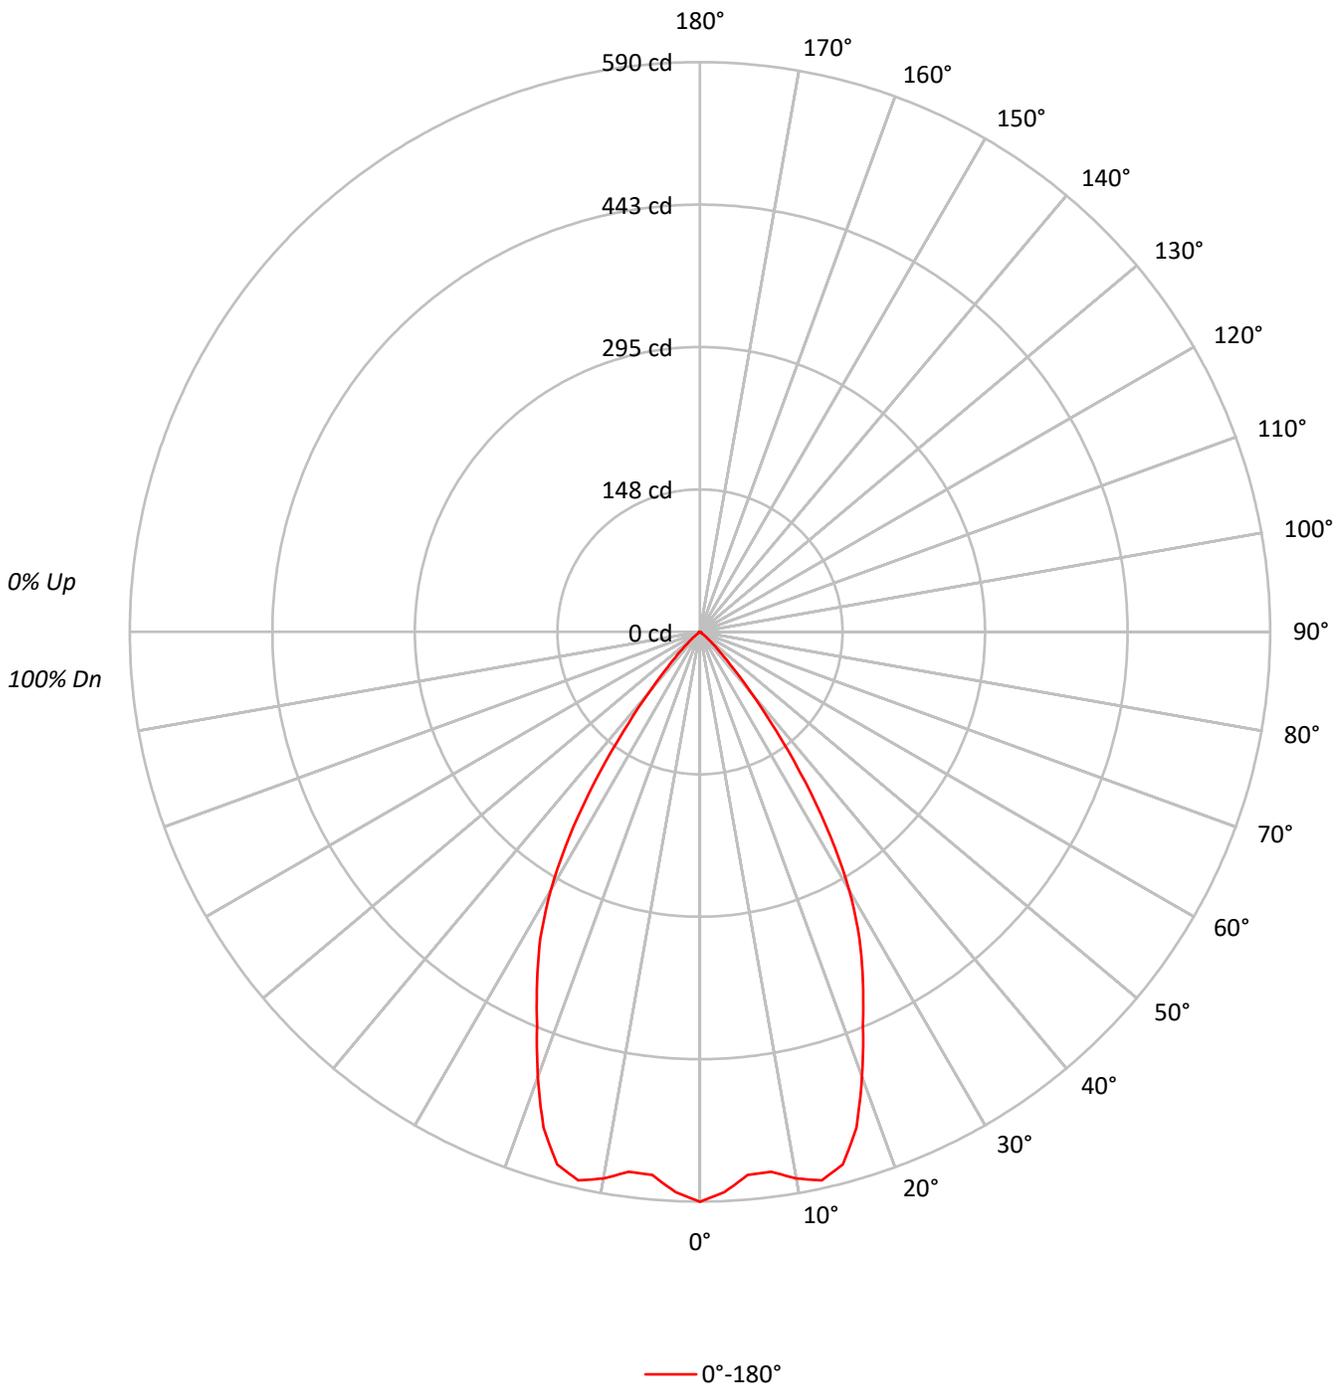



TEST NUMBER: P1262061
 CATALOG NUMBER: P3AS05R609727DE010 E3D1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94	94	94	94
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87	87	87	87
3	103	96	91	88	101	95	90	87	92	89	85	90	87	84	88	85	83	81	81	81	81
4	98	90	85	81	96	89	84	80	87	83	79	85	81	78	83	80	77	76	76	76	76
5	93	84	79	74	91	84	78	74	82	77	73	80	76	73	79	75	72	71	71	71	71
6	88	79	73	69	87	79	73	69	77	72	68	76	71	68	74	70	68	66	66	66	66
7	84	75	69	64	82	74	68	64	73	68	64	71	67	64	70	66	63	62	62	62	62
8	80	70	64	60	79	70	64	60	69	64	60	68	63	60	67	63	59	58	58	58	58
9	76	66	61	57	75	66	60	56	65	60	56	64	59	56	63	59	56	55	55	55	55
10	72	63	57	53	71	62	57	53	62	56	53	61	56	53	60	56	53	51	51	51	51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	129419
5°	124301
10°	127965
15°	129603
20°	114460
25°	96465
30°	78215
35°	50942
40°	23387
45°	8962
50°	3002
55°	803
60°	746
65°	675
70°	513
75°	678
80°	505
85°	1006

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 8962 cd/sqm



TEST NUMBER: P1262061
 CATALOG NUMBER: P3AS05R609727DE010 E3D1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	54.3	10.0
10°-20°	156.4	28.8
20°-30°	182.4	33.7
30°-40°	117.7	21.7
40°-50°	26.4	4.9
50°-60°	2.6	0.5
60°-70°	1.3	0.2
70°-80°	0.7	0.1
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	393.1	72.5
0°-40°	510.7	94.2
0°-60°	539.7	99.6
0°-90°	542.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	542.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	590	
5°	565	54
15°	571	156
25°	399	182
35°	190	118
45°	29	26
55°	2	3
65°	1	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1262061
CATALOG NUMBER: P3AS05R609727DE010 E3D1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	590.2
2.5°	580.6
5°	564.7
7.5°	563.8
10°	574.7
12.5°	581.8
15°	570.9
17.5°	538.3
20°	490.5
22.5°	440.6
25°	398.7
27.5°	357.6
30°	308.9
32.5°	251.9
35°	190.3
37.5°	130.0
40°	81.7
42.5°	49.0
45°	28.9
47.5°	16.8
50°	8.8
52.5°	2.9
55°	2.1
57.5°	1.7
60°	1.7
62.5°	1.3
65°	1.3
67.5°	1.3
70°	0.8
72.5°	0.8
75°	0.8
77.5°	0.4
80°	0.4
82.5°	0.4
85°	0.4
87.5°	0.0
90°	0.0

(END OF REPORT)