

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1262099

Luminaire Tested: P3AS05R659727DE010 E3DLD1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1262099
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-42)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R659727DE010 E3DLD1GPH
Description: 3in Adjustable LED luminaire with, R65 optic, 2700K CCT AND, 97CRI , E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 162.0 lumens
Efficiency: N/A
Efficacy: 22.5 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1262099

CATALOG NUMBER: P3AS05R659727DE010 E3DLD1GPH

Luminous Intensity Polar Plot

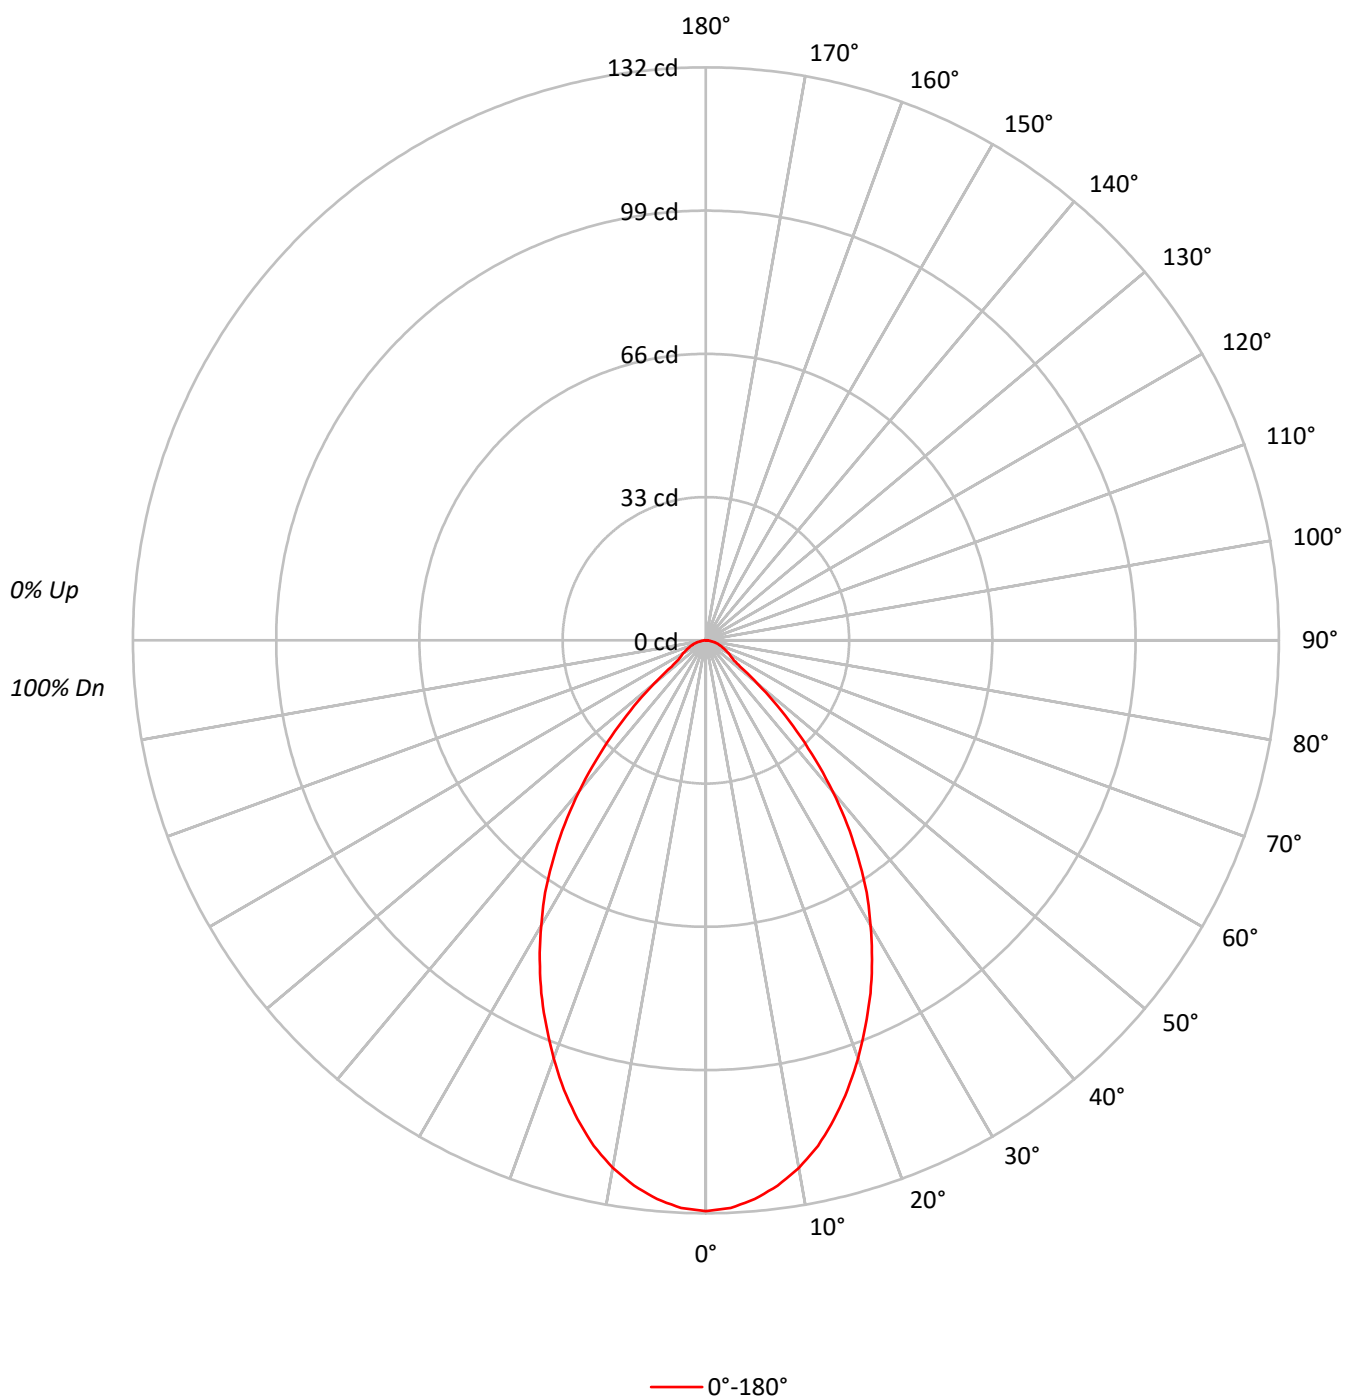

TEST NUMBER: P1262099

CATALOG NUMBER: P3AS05R659727DE010 E3DLD1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	103	110	107	104	101	102	100	98		99	97	95		95
2	105	99	94	90	103	97	93	89	94	90	87		91	88	85		88
3	99	91	85	80	96	89	84	79	87	82	78		84	80	77		82
4	92	83	77	72	90	82	76	71	80	75	70		78	73	70		76
5	87	77	70	65	85	76	69	65	74	68	64		72	67	63		71
6	82	71	64	59	80	70	64	59	69	63	58		67	62	58		66
7	77	66	59	54	75	65	59	54	64	58	54		63	57	53		61
8	72	61	55	50	71	61	54	50	60	54	49		59	53	49		58
9	68	57	51	46	67	57	50	46	56	50	46		55	49	46		54
10	65	54	47	43	64	53	47	43	52	47	43		52	46	42		51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	28835
5°	28439
10°	27477
15°	25925
20°	23919
25°	21703
30°	19218
35°	16356
40°	13024
45°	9179
50°	5322
55°	2906
60°	2719
65°	2439
70°	2244
75°	2118
80°	1768
85°	1510

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 9179 cd/sqm

TEST NUMBER: P1262099

CATALOG NUMBER: P3AS05R659727DE010 E3DLD1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	12.1	7.5
10°-20°	31.9	19.7
20°-30°	41.1	25.3
30°-40°	38.0	23.4
40°-50°	22.9	14.1
50°-60°	7.8	4.8
60°-70°	4.7	2.9
70°-80°	2.7	1.7
80°-90°	0.7	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	85.1	52.6
0°-40°	123.1	76.0
0°-60°	153.9	95.0
0°-90°	162.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	162.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	132	
5°	129	12
15°	114	32
25°	90	41
35°	61	38
45°	30	23
55°	8	8
65°	5	5
75°	2	3
85°	1	1
90°	0	

TEST NUMBER: P1262099

CATALOG NUMBER: P3AS05R659727DE010 E3DLD1GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	131.5
2.5°	130.9
5°	129.2
7.5°	126.7
10°	123.4
12.5°	119.3
15°	114.2
17.5°	108.6
20°	102.5
22.5°	96.1
25°	89.7
27.5°	82.9
30°	75.9
32.5°	68.9
35°	61.1
37.5°	53.5
40°	45.5
42.5°	37.4
45°	29.6
47.5°	22.4
50°	15.6
52.5°	9.9
55°	7.6
57.5°	6.8
60°	6.2
62.5°	5.3
65°	4.7
67.5°	4.1
70°	3.5
72.5°	3.1
75°	2.5
77.5°	2.1
80°	1.4
82.5°	1.0
85°	0.6
87.5°	0.4
90°	0.0

(END OF REPORT)