

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1262171

Luminaire Tested: P3AS09R159727DE010 E3CB1MW

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1262171  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-4)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R159727DE010 E3CB1MW  
Description: 3in Adjustable LED luminaire with, R15 optic, 2700K CCT AND, 97CRI , E3CB1MW TRIM  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 774.9 lumens  
Efficiency: N/A  
Efficacy: 69.8 lumens/watt  
Spacing Criteria (0/90/45): 0.3 / 0.3 / 0.29  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 11.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1262171  
CATALOG NUMBER: P3AS09R159727DE010 E3CB1MW

### Luminous Intensity Polar Plot

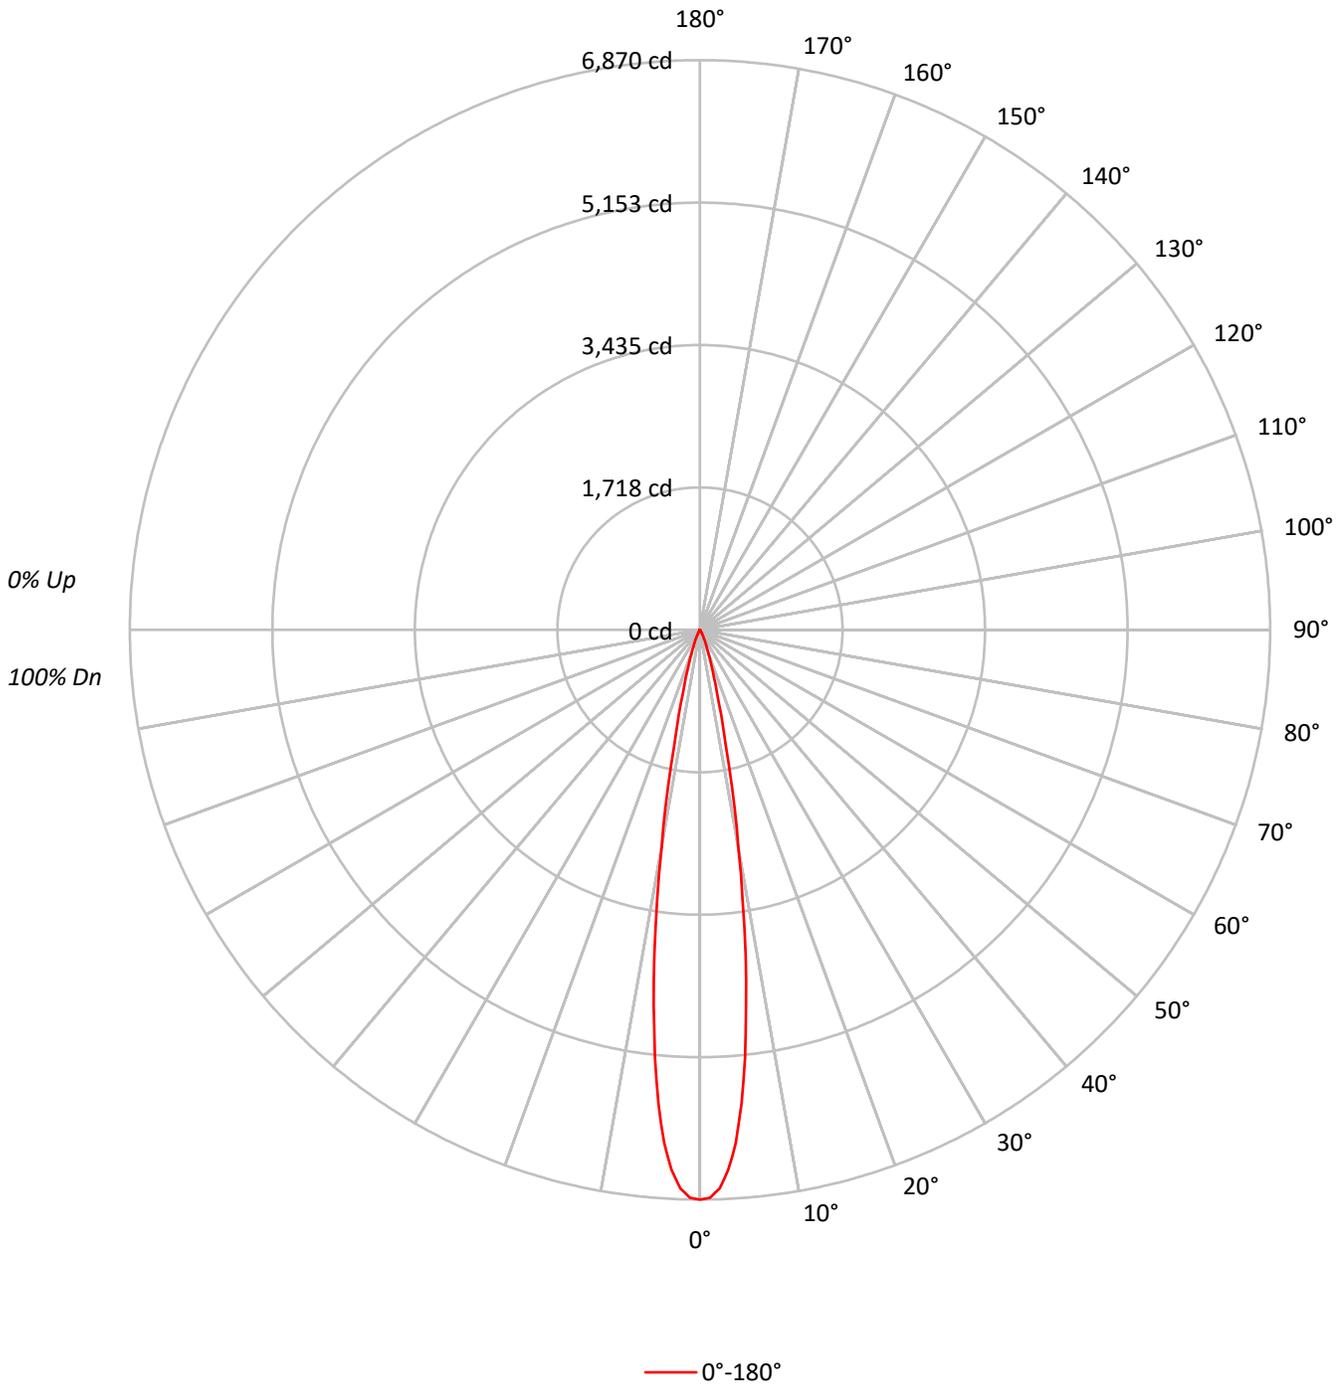



TEST NUMBER: P1262171  
 CATALOG NUMBER: P3AS09R159727DE010 E3CB1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98	98	98	98
2	113	110	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	96	96	96	96
3	110	106	103	101	108	105	102	100	102	100	98	100	98	97	98	97	95	94	94	94	94
4	107	103	100	97	106	102	99	97	100	97	95	98	96	94	97	95	93	92	92	92	92
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	92	91	91	91	91
6	103	98	94	92	102	97	94	92	96	93	91	95	92	91	94	92	90	89	89	89	89
7	101	96	92	90	100	95	92	90	94	91	89	93	91	89	92	90	89	88	88	88	88
8	99	94	90	88	98	93	90	88	93	90	88	92	89	87	91	89	87	86	86	86	86
9	97	92	89	87	97	92	89	87	91	88	86	90	88	86	90	87	86	85	85	85	85
10	96	90	87	85	95	90	87	85	89	87	85	89	86	85	88	86	85	84	84	84	84

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1506414
5°	1262532
10°	594690
15°	179297
20°	66342
25°	25792
30°	9622
35°	2945
40°	1059
45°	558
50°	409
55°	459
60°	526
65°	311
70°	385
75°	508
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 558 cd/sqm



TEST NUMBER: P1262171  
 CATALOG NUMBER: P3AS09R159727DE010 E3CB1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	443.4	57.2
10°-20°	263.6	34.0
20°-30°	55.4	7.1
30°-40°	8.9	1.2
40°-50°	1.5	0.2
50°-60°	1.1	0.1
60°-70°	0.7	0.1
70°-80°	0.4	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	762.4	98.4
0°-40°	771.3	99.5
0°-60°	773.9	99.9
0°-90°	774.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	774.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6870	
5°	5736	443
15°	790	264
25°	107	55
35°	11	9
45°	2	2
55°	1	1
65°	1	1
75°	1	0
85°	0	0
90°	0	



TEST NUMBER: P1262171  
CATALOG NUMBER: P3AS09R159727DE010 E3CB1MW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	6869.8
1°	6848.4
2°	6739.3
3°	6521.2
4°	6201.3
5°	5735.7
6°	5188.5
7°	4562.9
8°	3965.5
9°	3289.1
10°	2670.8
12.5°	1441.1
15°	789.8
17.5°	462.6
20°	284.3
22.5°	174.0
25°	106.6
27.5°	64.3
30°	38.0
32.5°	21.4
35°	11.0
37.5°	6.1
40°	3.7
42.5°	2.5
45°	1.8
47.5°	1.2
50°	1.2
52.5°	1.2
55°	1.2
57.5°	1.2
60°	1.2
62.5°	0.6
65°	0.6
67.5°	0.6
70°	0.6
72.5°	0.6
75°	0.6
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)