

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1262227

Luminaire Tested: P3AS09R259727DE010 E3CB1MB

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1262227
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R259727DE010 E3CB1MB
Description: 3in Adjustable LED luminaire with, R25 optic, 2700K CCT AND, 97CRI , E3CB1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 779.9 lumens
Efficiency: N/A
Efficacy: 70.3 lumens/watt
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.41
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1262227

CATALOG NUMBER: P3AS09R259727DE010 E3CB1MB

Luminous Intensity Polar Plot

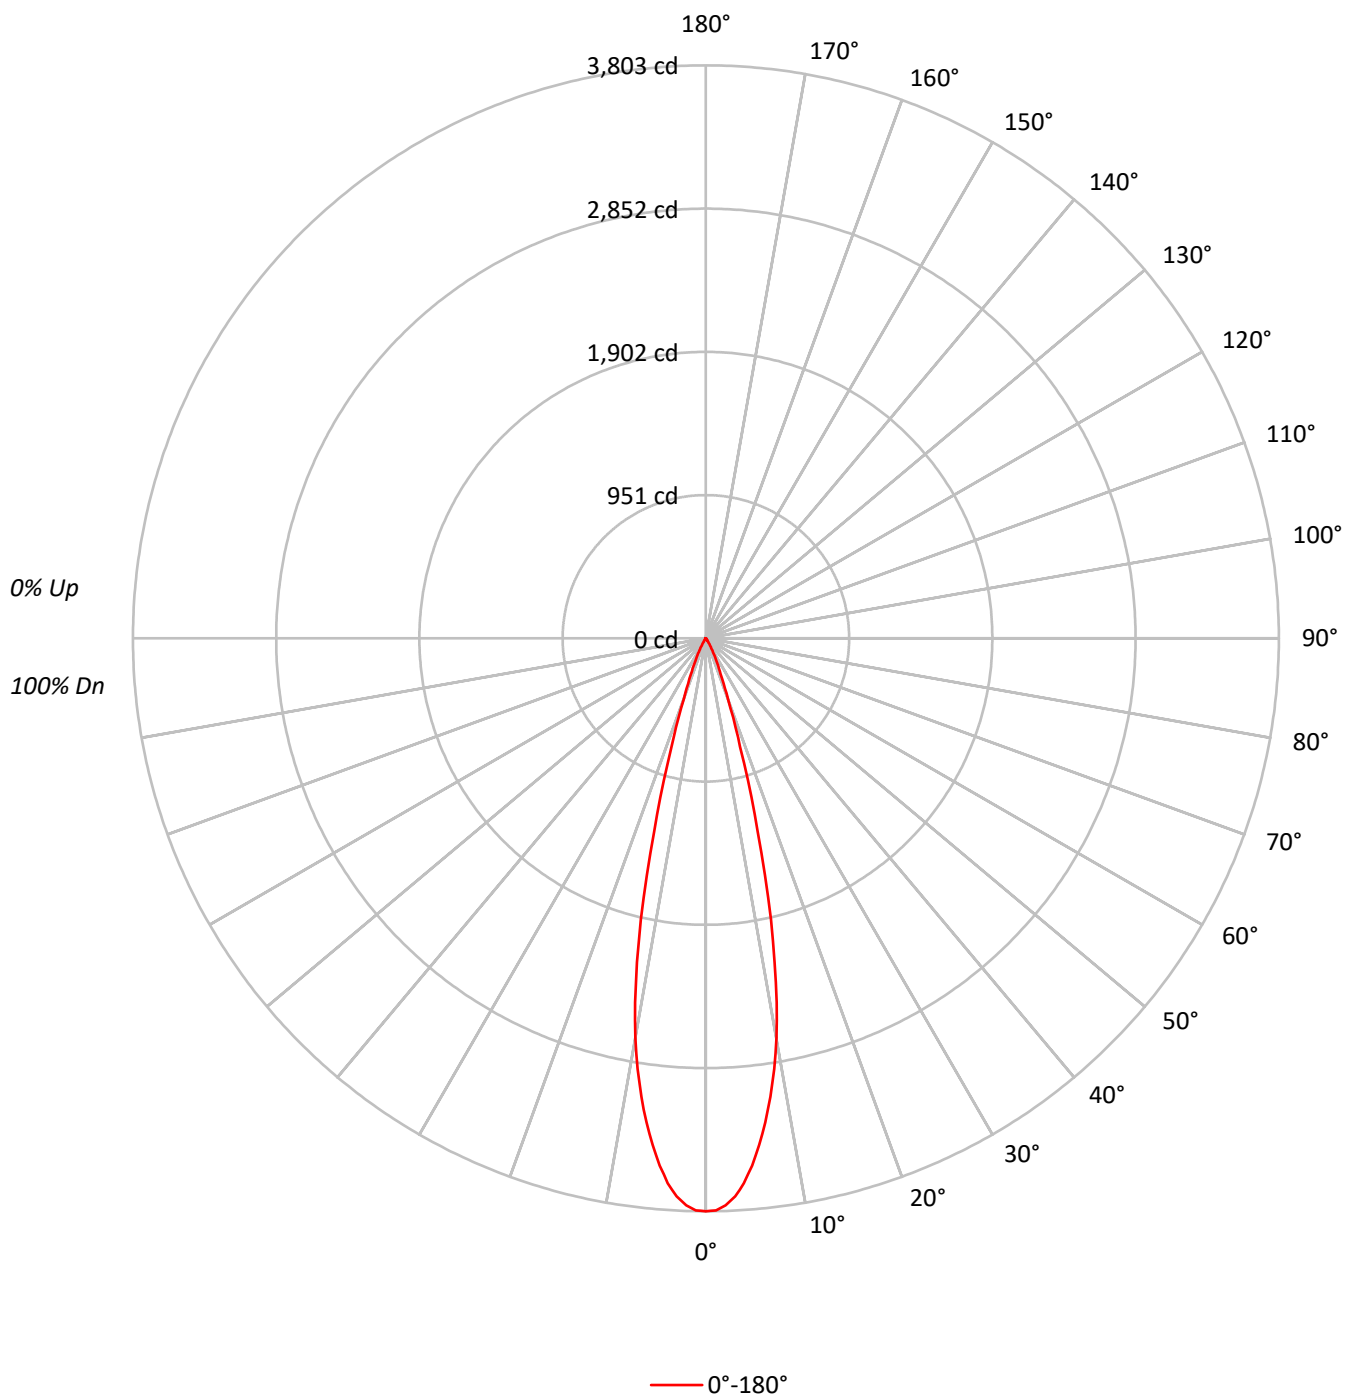

TEST NUMBER: P1262227

CATALOG NUMBER: P3AS09R259727DE010 E3CB1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	99
1	115	113	111	110	113	111	109	108	107	106	105	103	103	102	100	99	99	97	96	96
2	112	108	105	103	110	107	104	102	104	102	100	101	99	98	98	97	96	94	93	93
3	108	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92	91	91
4	105	100	97	94	104	99	96	93	97	95	92	96	93	91	94	92	90	89	88	88
5	103	97	93	90	101	96	93	90	95	92	89	93	91	89	92	90	88	87	86	86
6	100	94	90	87	99	93	90	87	92	89	87	91	88	86	90	87	86	85	84	84
7	97	91	88	85	96	91	87	85	90	87	84	89	86	84	88	85	83	83	82	82
8	95	89	85	83	94	89	85	82	88	84	82	87	84	82	86	83	81	81	80	80
9	93	87	83	80	92	86	83	80	86	82	80	85	82	80	84	82	80	79	78	78
10	91	85	81	78	90	84	81	78	84	80	78	83	80	78	82	80	78	77	76	76

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	833924
5°	773452
10°	599833
15°	300774
20°	98802
25°	39293
30°	14736
35°	4256
40°	1918
45°	775
50°	614
55°	459
60°	526
65°	623
70°	385
75°	508
80°	758
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 775 cd/sqm

TEST NUMBER: P1262227

CATALOG NUMBER: P3AS09R259727DE010 E3CB1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	309.1	39.6
10°-20°	368.7	47.3
20°-30°	83.1	10.7
30°-40°	13.5	1.7
40°-50°	2.4	0.3
50°-60°	1.3	0.2
60°-70°	1.1	0.1
70°-80°	0.6	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	760.9	97.6
0°-40°	774.4	99.3
0°-60°	778.1	99.8
0°-90°	779.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	779.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3803	
5°	3514	309
15°	1325	369
25°	162	83
35°	16	13
45°	2	2
55°	1	1
65°	1	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1262227

CATALOG NUMBER: P3AS09R259727DE010 E3CB1MB

CANDELA DISTRIBUTION (FULL):

0°	
0°	3803.0
1°	3796.9
2°	3766.3
3°	3709.9
4°	3624.7
5°	3513.8
6°	3381.4
7°	3238.0
8°	3073.8
9°	2894.3
10°	2693.9
11°	2462.8
12°	2196.9
13°	1918.7
14°	1620.2
15°	1324.9
17.5°	755.0
20°	423.4
22.5°	255.5
25°	162.4
27.5°	99.9
30°	58.2
32.5°	30.6
35°	15.9
37.5°	10.4
40°	6.7
42.5°	4.3
45°	2.5
47.5°	1.8
50°	1.8
52.5°	1.8
55°	1.2
57.5°	1.2
60°	1.2
62.5°	1.2
65°	1.2
67.5°	1.2
70°	0.6
72.5°	0.6
75°	0.6
77.5°	0.6
80°	0.6
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1262227

CATALOG NUMBER: P3AS09R259727DE010 E3CB1MB

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)