

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1262432

Luminaire Tested: P3AS09R609727DE010 E3CB1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1262432
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-40)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R609727DE010 E3CB1MMS
Description: 3in Adjustable LED luminaire with, R60 optic, 2700K CCT AND, 97CRI , E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 792.0 lumens
Efficiency: N/A
Efficacy: 71.3 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.91
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1262432

CATALOG NUMBER: P3AS09R609727DE010 E3CB1MMS

Luminous Intensity Polar Plot

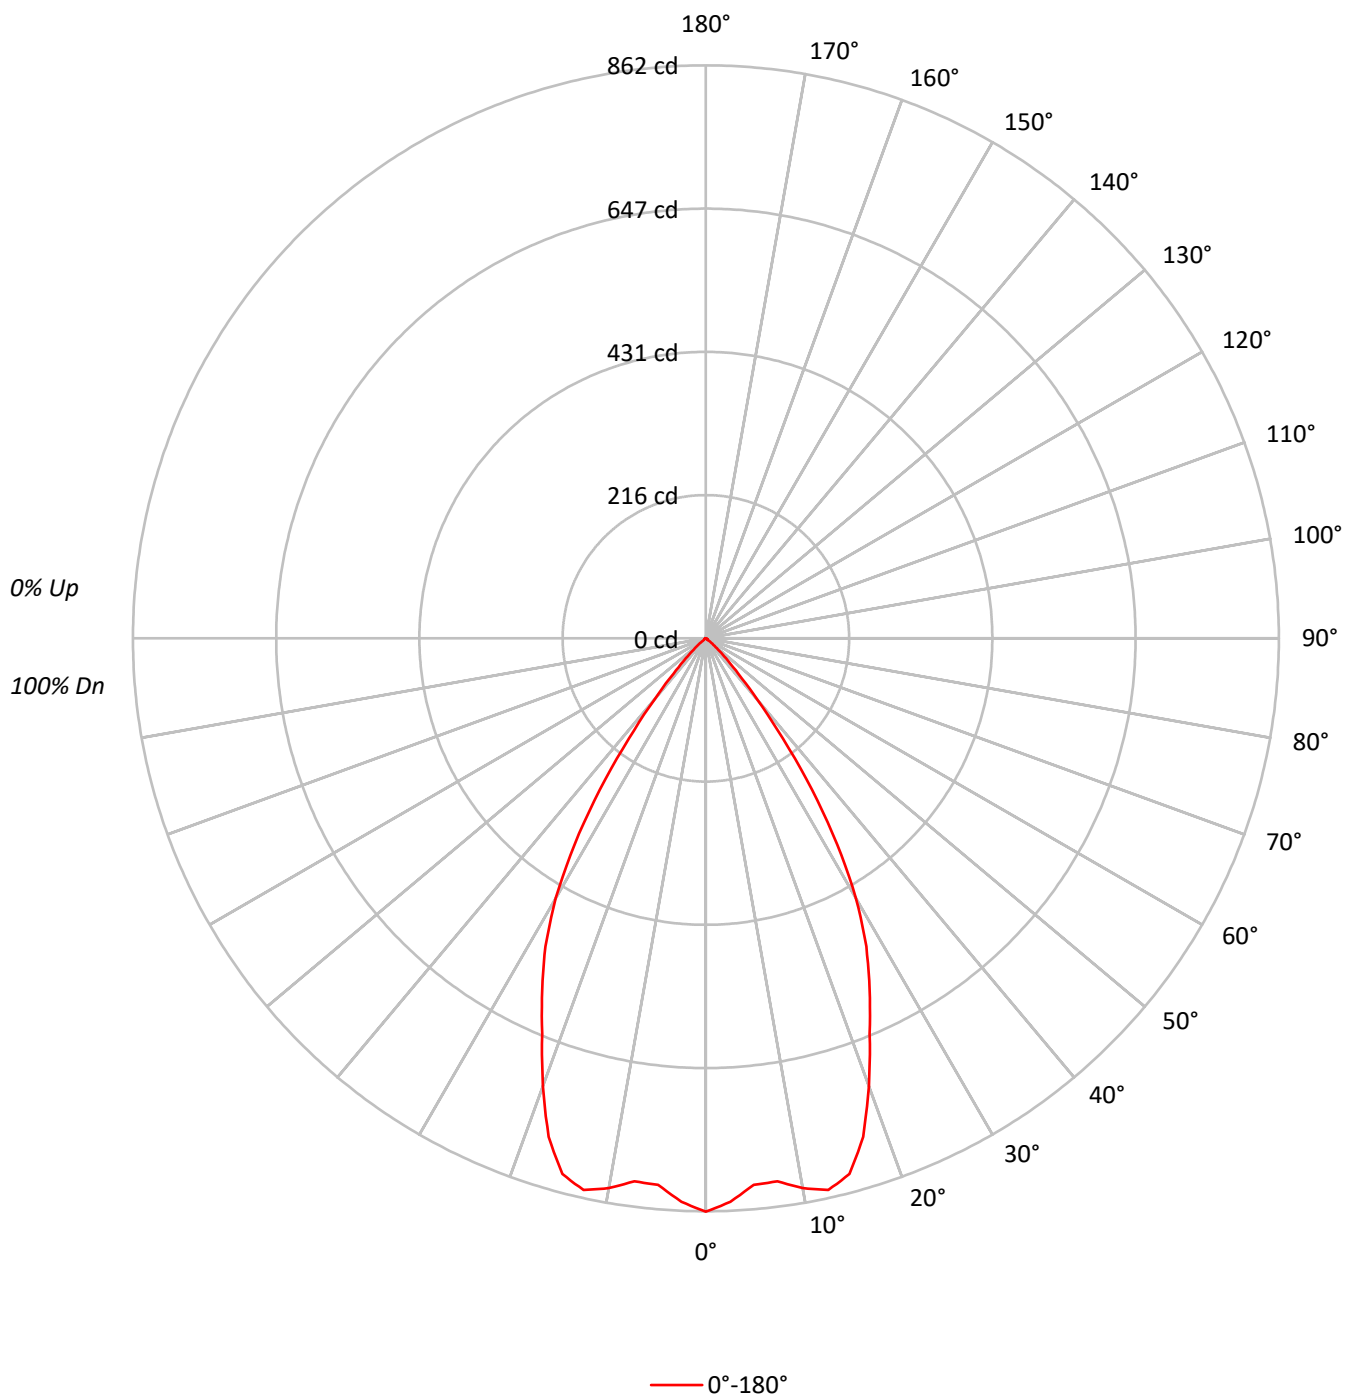

TEST NUMBER: P1262432

CATALOG NUMBER: P3AS09R609727DE010 E3CB1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	108	106	111	109	106	104	105	103	101		101	100	98		97
2	108	103	99	96	106	102	98	95	98	95	93		95	93	91		93
3	103	96	91	88	101	95	90	87	92	89	85		90	87	84		88
4	98	90	85	81	96	89	84	80	87	83	79		85	81	78		83
5	93	84	79	74	91	84	78	74	82	77	73		80	76	73		79
6	88	79	73	69	87	79	73	69	77	72	68		76	71	68		74
7	84	75	69	64	82	74	68	64	73	68	64		71	67	64		70
8	80	70	64	60	78	70	64	60	69	64	60		68	63	60		67
9	76	66	61	57	75	66	60	56	65	60	56		64	59	56		63
10	72	63	57	53	71	62	57	53	62	56	53		61	56	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	189130
5°	181620
10°	186993
15°	189400
20°	167245
25°	140936
30°	114321
35°	74445
40°	34178
45°	13118
50°	4401
55°	1185
60°	1096
65°	934
70°	769
75°	1017
80°	758
85°	1510

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 13118 cd/sqm

TEST NUMBER: P1262432

CATALOG NUMBER: P3AS09R609727DE010 E3CB1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.4	10.0
10°-20°	228.5	28.8
20°-30°	266.5	33.6
30°-40°	172.0	21.7
40°-50°	38.5	4.9
50°-60°	3.9	0.5
60°-70°	1.8	0.2
70°-80°	1.0	0.1
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	574.4	72.5
0°-40°	746.3	94.2
0°-60°	788.7	99.6
0°-90°	792.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	792.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	862	
5°	825	79
15°	834	228
25°	582	266
35°	278	172
45°	42	39
55°	3	4
65°	2	2
75°	1	1
85°	1	0
90°	0	

TEST NUMBER: P1262432

CATALOG NUMBER: P3AS09R609727DE010 E3CB1MMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	862.5
2.5°	848.4
5°	825.1
7.5°	823.9
10°	839.8
12.5°	850.2
15°	834.3
17.5°	786.5
20°	716.7
22.5°	643.8
25°	582.5
27.5°	522.5
30°	451.5
32.5°	368.1
35°	278.1
37.5°	189.9
40°	119.4
42.5°	71.7
45°	42.3
47.5°	24.5
50°	12.9
52.5°	4.3
55°	3.1
57.5°	2.5
60°	2.5
62.5°	1.8
65°	1.8
67.5°	1.8
70°	1.2
72.5°	1.2
75°	1.2
77.5°	0.6
80°	0.6
82.5°	0.6
85°	0.6
87.5°	0.0
90°	0.0

(END OF REPORT)