

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1262586

Luminaire Tested: P3AS13R159727DE010 E3D1H

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1262586
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-7)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R159727DE010 E3D1H
Description: 3in Adjustable LED luminaire with, R15 optic, 2700K CCT AND, 97CRI , E3D1H TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1052.0 lumens
Efficiency: N/A
Efficacy: 72.1 lumens/watt
Spacing Criteria (0/90/45): 0.3 / 0.3 / 0.29
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1262586
CATALOG NUMBER: P3AS13R159727DE010 E3D1H

Luminous Intensity Polar Plot

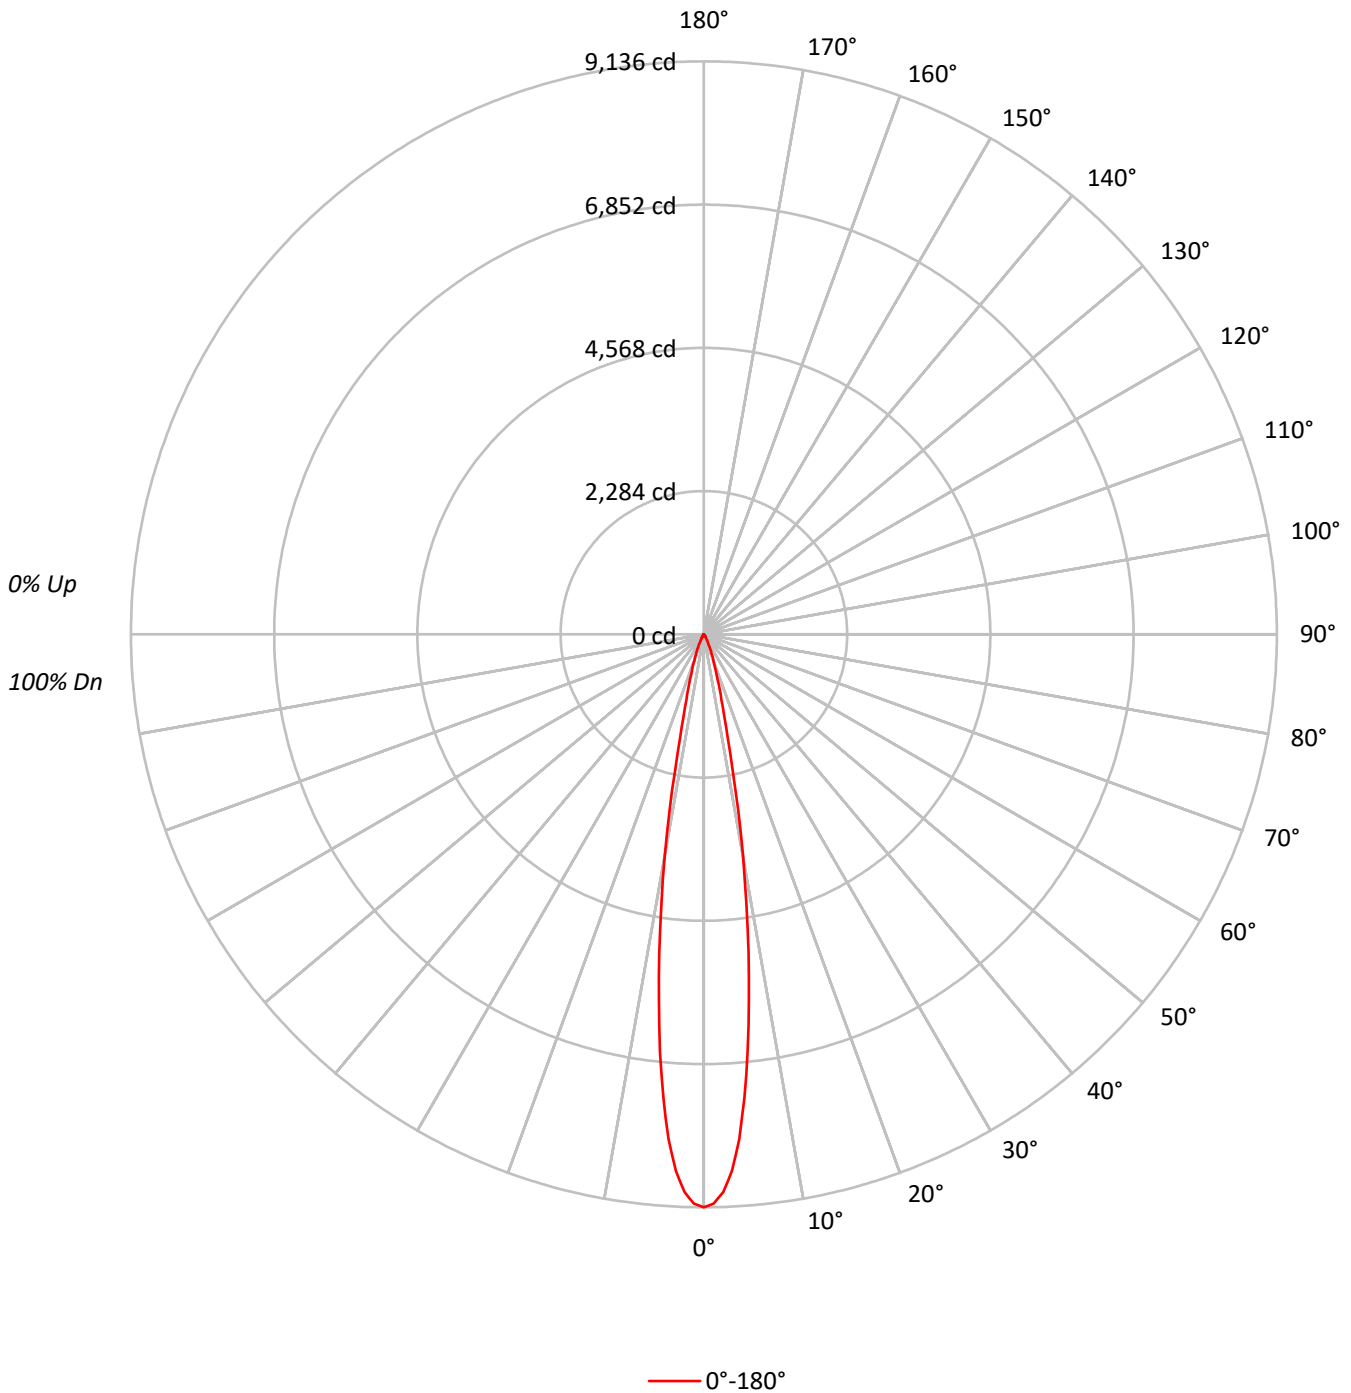



TEST NUMBER: P1262586
 CATALOG NUMBER: P3AS13R159727DE010 E3D1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	116	114	112	111	113	112	110	109	108	107	105	104	103	102	101	100	99	98	98	98	98
2	112	109	107	105	110	108	105	103	105	103	101	102	100	99	99	98	97	96	96	96	96
3	110	106	102	100	108	104	102	99	102	100	98	100	98	96	98	96	95	94	94	94	94
4	107	102	99	96	105	101	98	96	99	97	95	98	96	94	96	94	93	92	92	92	92
5	105	100	96	94	103	99	96	93	97	94	92	96	93	92	94	93	91	90	90	90	90
6	102	97	94	91	101	96	93	91	95	92	90	94	92	90	93	91	89	88	88	88	88
7	100	95	91	89	99	94	91	89	93	90	88	92	90	88	91	89	88	87	87	87	87
8	98	93	89	87	97	92	89	87	91	89	87	91	88	86	90	88	86	85	85	85	85
9	96	91	88	85	96	91	87	85	90	87	85	89	87	85	88	86	85	84	84	84	84
10	95	89	86	84	94	89	86	84	88	85	83	88	85	83	87	85	83	82	82	82	82

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2003282
5°	1633542
10°	800007
15°	244860
20°	103702
25°	46914
30°	18281
35°	8432
40°	2634
45°	992
50°	409
55°	153
60°	175
65°	208
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 992 cd/sqm



TEST NUMBER: P1262586
 CATALOG NUMBER: P3AS13R159727DE010 E3D1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	577.7	54.9
10°-20°	354.5	33.7
20°-30°	95.2	9.1
30°-40°	21.0	2.0
40°-50°	2.9	0.3
50°-60°	0.5	0.1
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1027.3	97.7
0°-40°	1048.3	99.6
0°-60°	1051.8	100.0
0°-90°	1052.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1052.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	9136	
5°	7421	578
15°	1079	354
25°	194	95
35°	32	21
45°	3	3
55°	0	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1262586
CATALOG NUMBER: P3AS13R159727DE010 E3D1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	9135.7
1°	9078.6
2°	8895.5
3°	8565.7
4°	8069.0
5°	7421.2
6°	6688.4
7°	5872.3
8°	5122.3
9°	4327.3
10°	3592.9
11°	2866.1
12°	2205.1
13°	1696.1
14°	1342.7
15°	1078.6
17.5°	668.6
20°	444.4
22.5°	299.2
25°	193.9
27.5°	114.9
30°	72.2
32.5°	48.7
35°	31.5
37.5°	17.6
40°	9.2
42.5°	5.2
45°	3.2
47.5°	2.0
50°	1.2
52.5°	0.8
55°	0.4
57.5°	0.4
60°	0.4
62.5°	0.4
65°	0.4
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1262586
CATALOG NUMBER: P3AS13R159727DE010 E3D1H

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)