

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1262671

Luminaire Tested: P3AS13R309727DE010 E3CB1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1262671
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-16)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R309727DE010 E3CB1MMS
Description: 3in Adjustable LED luminaire with, R30 optic, 2700K CCT AND, 97CRI , E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1035.9 lumens
Efficiency: N/A
Efficacy: 71.0 lumens/watt
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.47
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1262671

CATALOG NUMBER: P3AS13R309727DE010 E3CB1MMS

Luminous Intensity Polar Plot

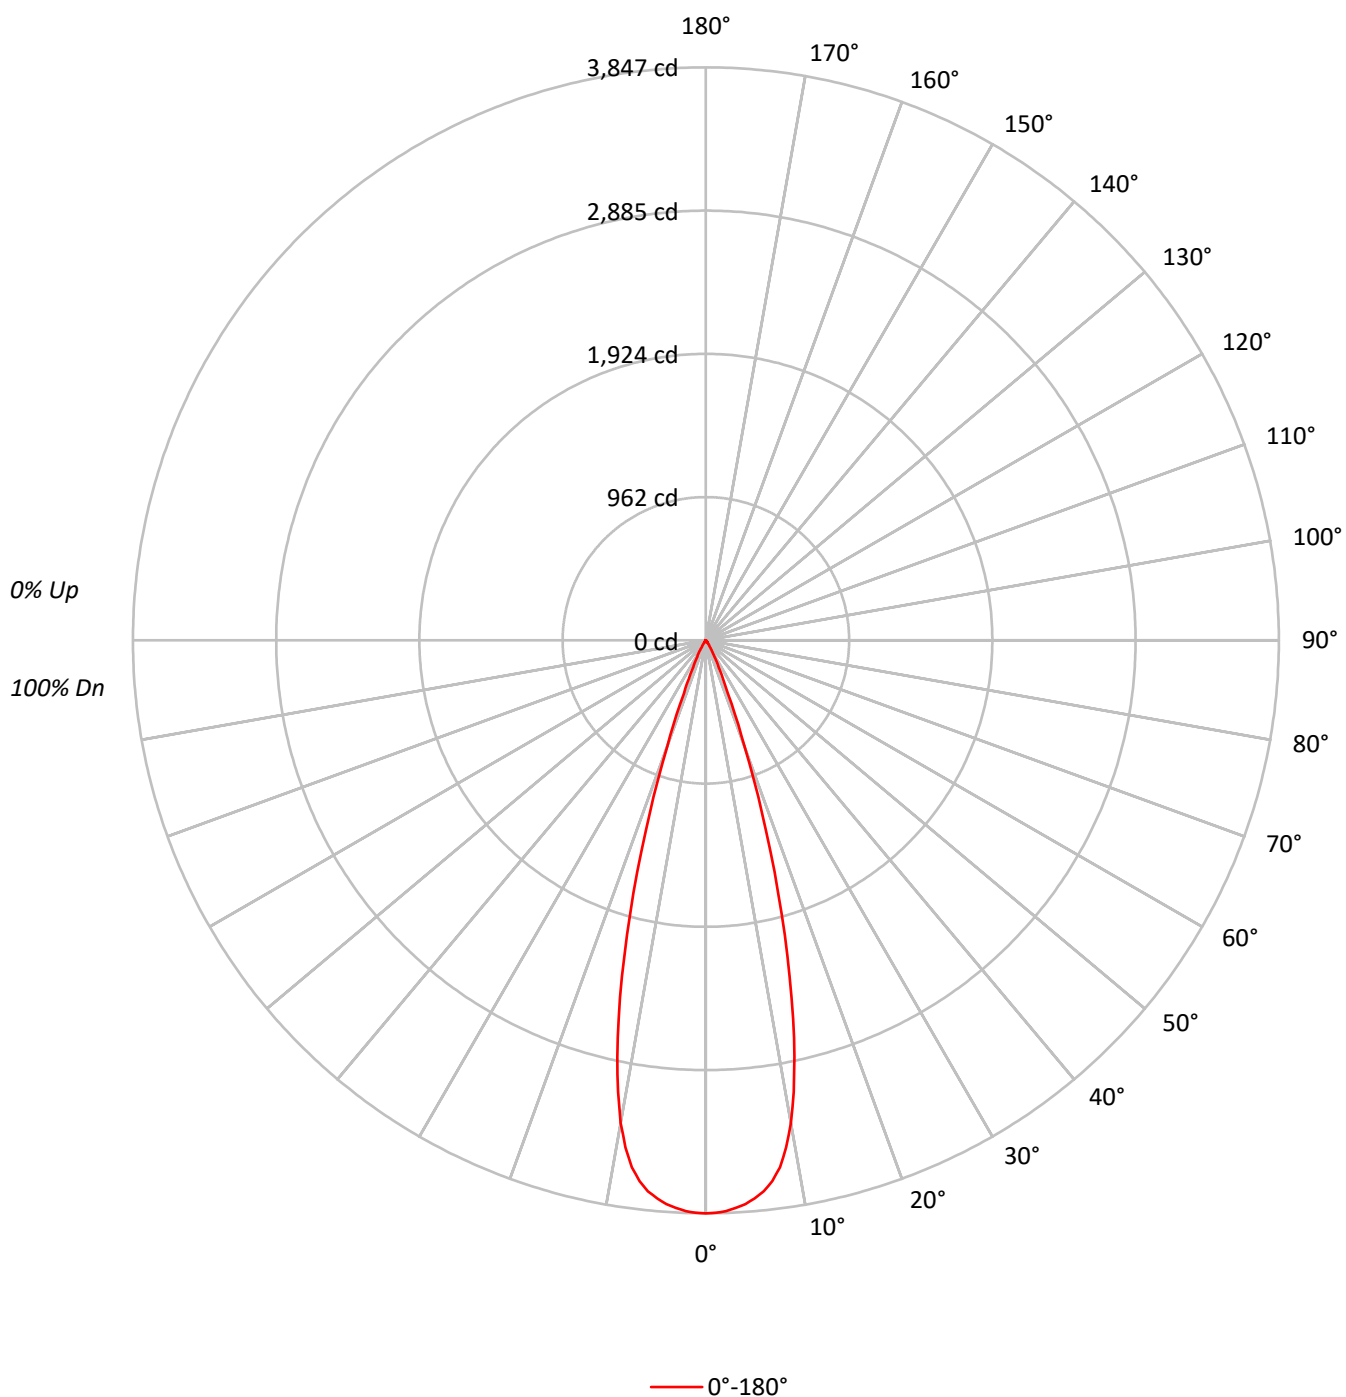

TEST NUMBER: P1262671

CATALOG NUMBER: P3AS13R309727DE010 E3CB1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	109	113	111	109	108	107	106	104		103	102	101		100
2	111	108	105	102	109	106	104	101	103	101	99		100	99	97		98
3	108	103	100	97	106	102	99	96	100	97	95		97	95	93		95
4	105	100	96	93	103	99	95	92	97	94	91		95	92	90		93
5	102	96	92	89	100	95	92	89	94	90	88		92	89	87		91
6	99	93	89	86	98	92	88	86	91	88	85		90	87	85		89
7	96	90	86	83	95	89	86	83	88	85	83		87	84	82		86
8	94	87	83	81	93	87	83	80	86	83	80		85	82	80		84
9	91	85	81	78	90	84	81	78	84	80	78		83	80	78		82
10	89	83	79	76	88	82	78	76	82	78	76		81	78	76		80

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	843660
5°	827711
10°	732741
15°	464225
20°	176229
25°	52164
30°	20611
35°	6318
40°	2805
45°	1023
50°	819
55°	612
60°	702
65°	830
70°	513
75°	678
80°	1010
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1023 cd/sqm

TEST NUMBER: P1262671

CATALOG NUMBER: P3AS13R309727DE010 E3CB1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	345.7	33.4
10°-20°	538.7	52.0
20°-30°	125.1	12.1
30°-40°	19.4	1.9
40°-50°	3.3	0.3
50°-60°	1.5	0.1
60°-70°	1.3	0.1
70°-80°	0.8	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1009.5	97.4
0°-40°	1028.9	99.3
0°-60°	1033.7	99.8
0°-90°	1035.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1035.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3847	
5°	3760	346
15°	2045	539
25°	216	125
35°	24	19
45°	3	3
55°	2	2
65°	2	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1262671

CATALOG NUMBER: P3AS13R309727DE010 E3CB1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	3847.4
1°	3844.9
2°	3834.3
3°	3816.4
4°	3793.7
5°	3760.3
6°	3718.8
7°	3657.0
8°	3572.3
9°	3447.8
10°	3290.8
11°	3088.1
12°	2859.5
13°	2605.6
14°	2326.5
15°	2044.9
17.5°	1337.8
20°	755.2
22.5°	385.7
25°	215.6
27.5°	132.6
30°	81.4
32.5°	43.9
35°	23.6
37.5°	15.5
40°	9.8
42.5°	5.7
45°	3.3
47.5°	2.4
50°	2.4
52.5°	1.6
55°	1.6
57.5°	1.6
60°	1.6
62.5°	1.6
65°	1.6
67.5°	0.8
70°	0.8
72.5°	0.8
75°	0.8
77.5°	0.8
80°	0.8
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1262671
CATALOG NUMBER: P3AS13R309727DE010 E3CB1MMS

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)