

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1262825

Luminaire Tested: P3AS13R559727DE010 E3DL1H

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1262825  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-35)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRIS  
Catalog Number: P3AS13R559727DE010 E3DL1H  
Description: 3in Adjustable LED luminaire with, R55 optic, 2700K CCT AND, 97CRI , E3DL1H TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 887.0 lumens  
Efficiency: N/A  
Efficacy: 60.8 lumens/watt  
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.81  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 14.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1262825  
CATALOG NUMBER: P3AS13R559727DE010 E3DL1H

### Luminous Intensity Polar Plot

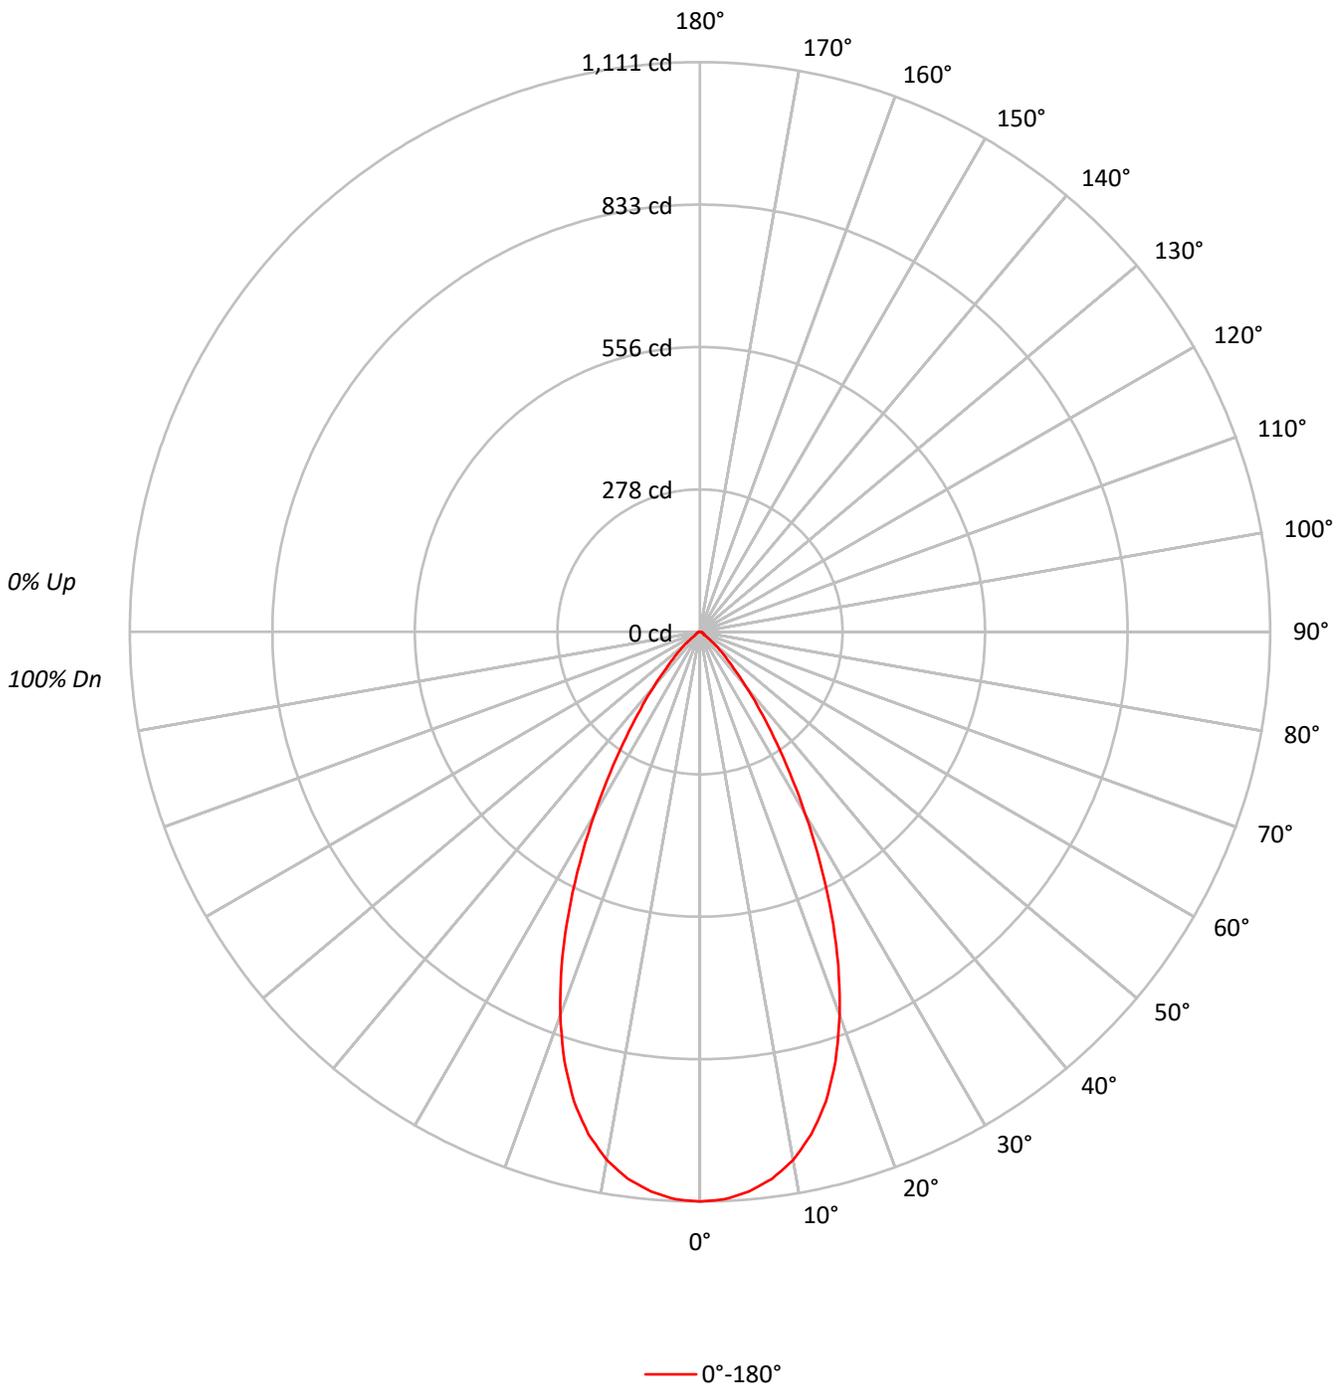



TEST NUMBER: P1262825  
 CATALOG NUMBER: P3AS13R559727DE010 E3DL1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	85	82	81			
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	82	79	77	75			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70			
6	88	79	73	69	86	78	73	68	77	72	68	75	71	68	74	70	67	66			
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62			
8	80	70	64	60	78	70	64	60	69	63	60	67	63	60	67	62	59	58			
9	76	66	61	57	75	66	60	56	65	60	56	64	59	56	63	59	56	55			
10	73	63	57	53	72	62	57	53	62	57	53	61	56	53	60	56	53	52			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	243555
5°	241096
10°	232817
15°	215211
20°	185703
25°	146670
30°	104041
35°	67084
40°	40304
45°	22700
50°	12213
55°	4358
60°	3947
65°	3788
70°	3654
75°	3474
80°	3031
85°	2013

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 22700 cd/sqm



TEST NUMBER: P1262825  
 CATALOG NUMBER: P3AS13R559727DE010 E3DL1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	103.0	11.6
10°-20°	262.1	29.6
20°-30°	274.7	31.0
30°-40°	160.3	18.1
40°-50°	60.0	6.8
50°-60°	14.1	1.6
60°-70°	7.2	0.8
70°-80°	4.3	0.5
80°-90°	1.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	639.9	72.1
0°-40°	800.1	90.2
0°-60°	874.2	98.6
0°-90°	887.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	887.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1111	
5°	1095	103
15°	948	262
25°	606	275
35°	251	160
45°	73	60
55°	11	14
65°	7	7
75°	4	4
85°	1	1
90°	0	

TEST NUMBER: P1262825  
CATALOG NUMBER: P3AS13R559727DE010 E3DL1H

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1110.7
2.5°	1107.5
5°	1095.3
7.5°	1075.7
10°	1045.6
12.5°	1003.3
15°	948.0
17.5°	878.0
20°	795.8
22.5°	703.9
25°	606.2
27.5°	506.1
30°	410.9
32.5°	324.7
35°	250.6
37.5°	190.4
40°	140.8
42.5°	100.9
45°	73.2
47.5°	52.9
50°	35.8
52.5°	20.3
55°	11.4
57.5°	9.8
60°	9.0
62.5°	8.1
65°	7.3
67.5°	6.5
70°	5.7
72.5°	4.9
75°	4.1
77.5°	3.3
80°	2.4
82.5°	1.6
85°	0.8
87.5°	0.8
90°	0.0

(END OF REPORT)