

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1262840

Luminaire Tested: P3AS13R559727DE010 E3DLP1WH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1262840
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-35)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R559727DE010 E3DLP1WH
Description: 3in Adjustable LED luminaire with, R55 optic, 2700K CCT AND, 97CRI , E3DLP1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 887.0 lumens
Efficiency: N/A
Efficacy: 60.8 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.81
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1262840

CATALOG NUMBER: P3AS13R559727DE010 E3DLP1WH

Luminous Intensity Polar Plot

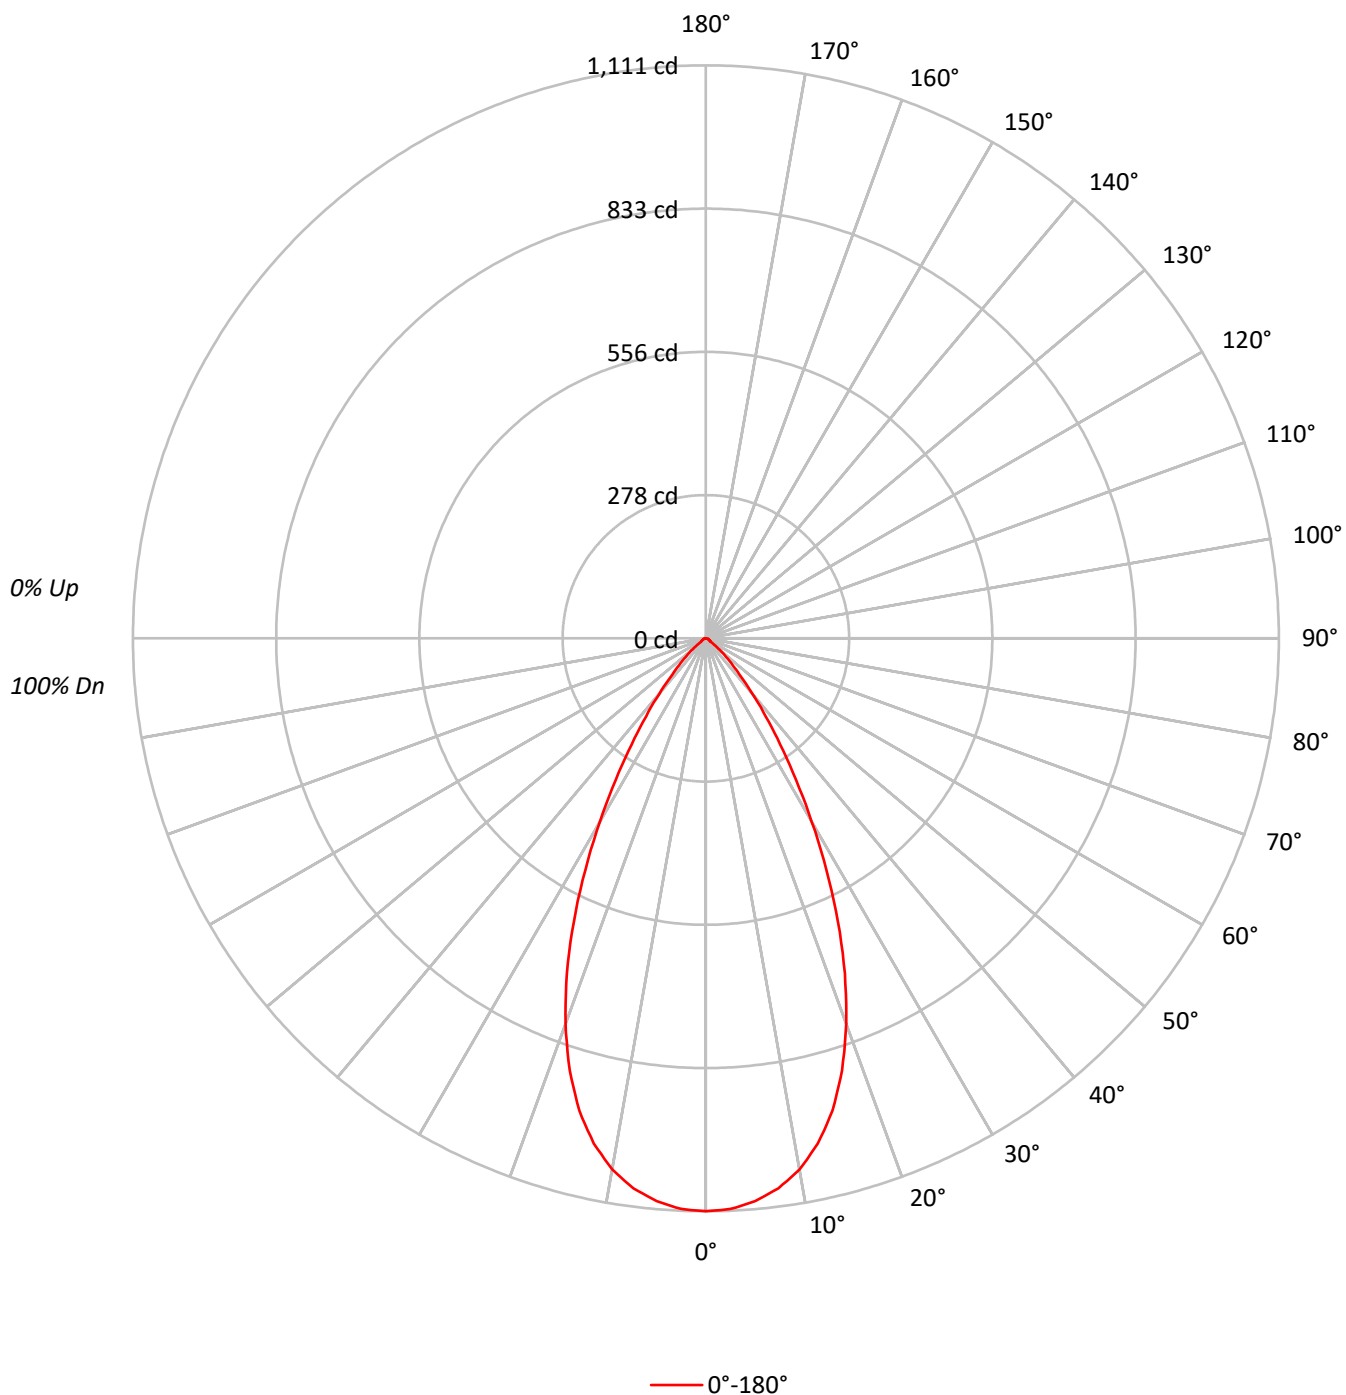

TEST NUMBER: P1262840

CATALOG NUMBER: P3AS13R559727DE010 E3DLP1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	111	108	106	111	108	106	104	104	103	101		101	99	98		97
2	108	103	99	95	106	101	97	94	98	95	92		95	92	90		92
3	102	96	91	87	100	94	90	86	92	88	85		89	86	83		87
4	97	90	84	80	95	89	83	79	86	82	78		84	81	78		82
5	92	84	78	74	91	83	78	74	81	77	73		80	76	72		78
6	88	79	73	69	86	78	73	68	77	72	68		75	71	68		74
7	84	74	68	64	82	74	68	64	72	67	64		71	67	63		70
8	80	70	64	60	78	70	64	60	69	63	60		67	63	60		67
9	76	66	61	57	75	66	60	56	65	60	56		64	59	56		63
10	73	63	57	53	72	62	57	53	62	57	53		61	56	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	243555
5°	241096
10°	232817
15°	215211
20°	185703
25°	146670
30°	104041
35°	67084
40°	40304
45°	22700
50°	12213
55°	4358
60°	3947
65°	3788
70°	3654
75°	3474
80°	3031
85°	2013

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 22700 cd/sqm

TEST NUMBER: P1262840

CATALOG NUMBER: P3AS13R559727DE010 E3DLP1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	103.0	11.6
10°-20°	262.1	29.6
20°-30°	274.7	31.0
30°-40°	160.3	18.1
40°-50°	60.0	6.8
50°-60°	14.1	1.6
60°-70°	7.2	0.8
70°-80°	4.3	0.5
80°-90°	1.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	639.9	72.1
0°-40°	800.1	90.2
0°-60°	874.2	98.6
0°-90°	887.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	887.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1111	
5°	1095	103
15°	948	262
25°	606	275
35°	251	160
45°	73	60
55°	11	14
65°	7	7
75°	4	4
85°	1	1
90°	0	

TEST NUMBER: P1262840

CATALOG NUMBER: P3AS13R559727DE010 E3DLP1WH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1110.7
2.5°	1107.5
5°	1095.3
7.5°	1075.7
10°	1045.6
12.5°	1003.3
15°	948.0
17.5°	878.0
20°	795.8
22.5°	703.9
25°	606.2
27.5°	506.1
30°	410.9
32.5°	324.7
35°	250.6
37.5°	190.4
40°	140.8
42.5°	100.9
45°	73.2
47.5°	52.9
50°	35.8
52.5°	20.3
55°	11.4
57.5°	9.8
60°	9.0
62.5°	8.1
65°	7.3
67.5°	6.5
70°	5.7
72.5°	4.9
75°	4.1
77.5°	3.3
80°	2.4
82.5°	1.6
85°	0.8
87.5°	0.8
90°	0.0

(END OF REPORT)