

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1262841

Luminaire Tested: P3AS13R559727DE010 E3DLP1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1262841
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-33)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R559727DE010 E3DLP1WMH
Description: 3in Adjustable LED luminaire with, R55 optic, 2700K CCT AND, 97CRI , E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 592.0 lumens
Efficiency: N/A
Efficacy: 40.5 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.8
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1262841

CATALOG NUMBER: P3AS13R559727DE010 E3DLP1WMH

Luminous Intensity Polar Plot

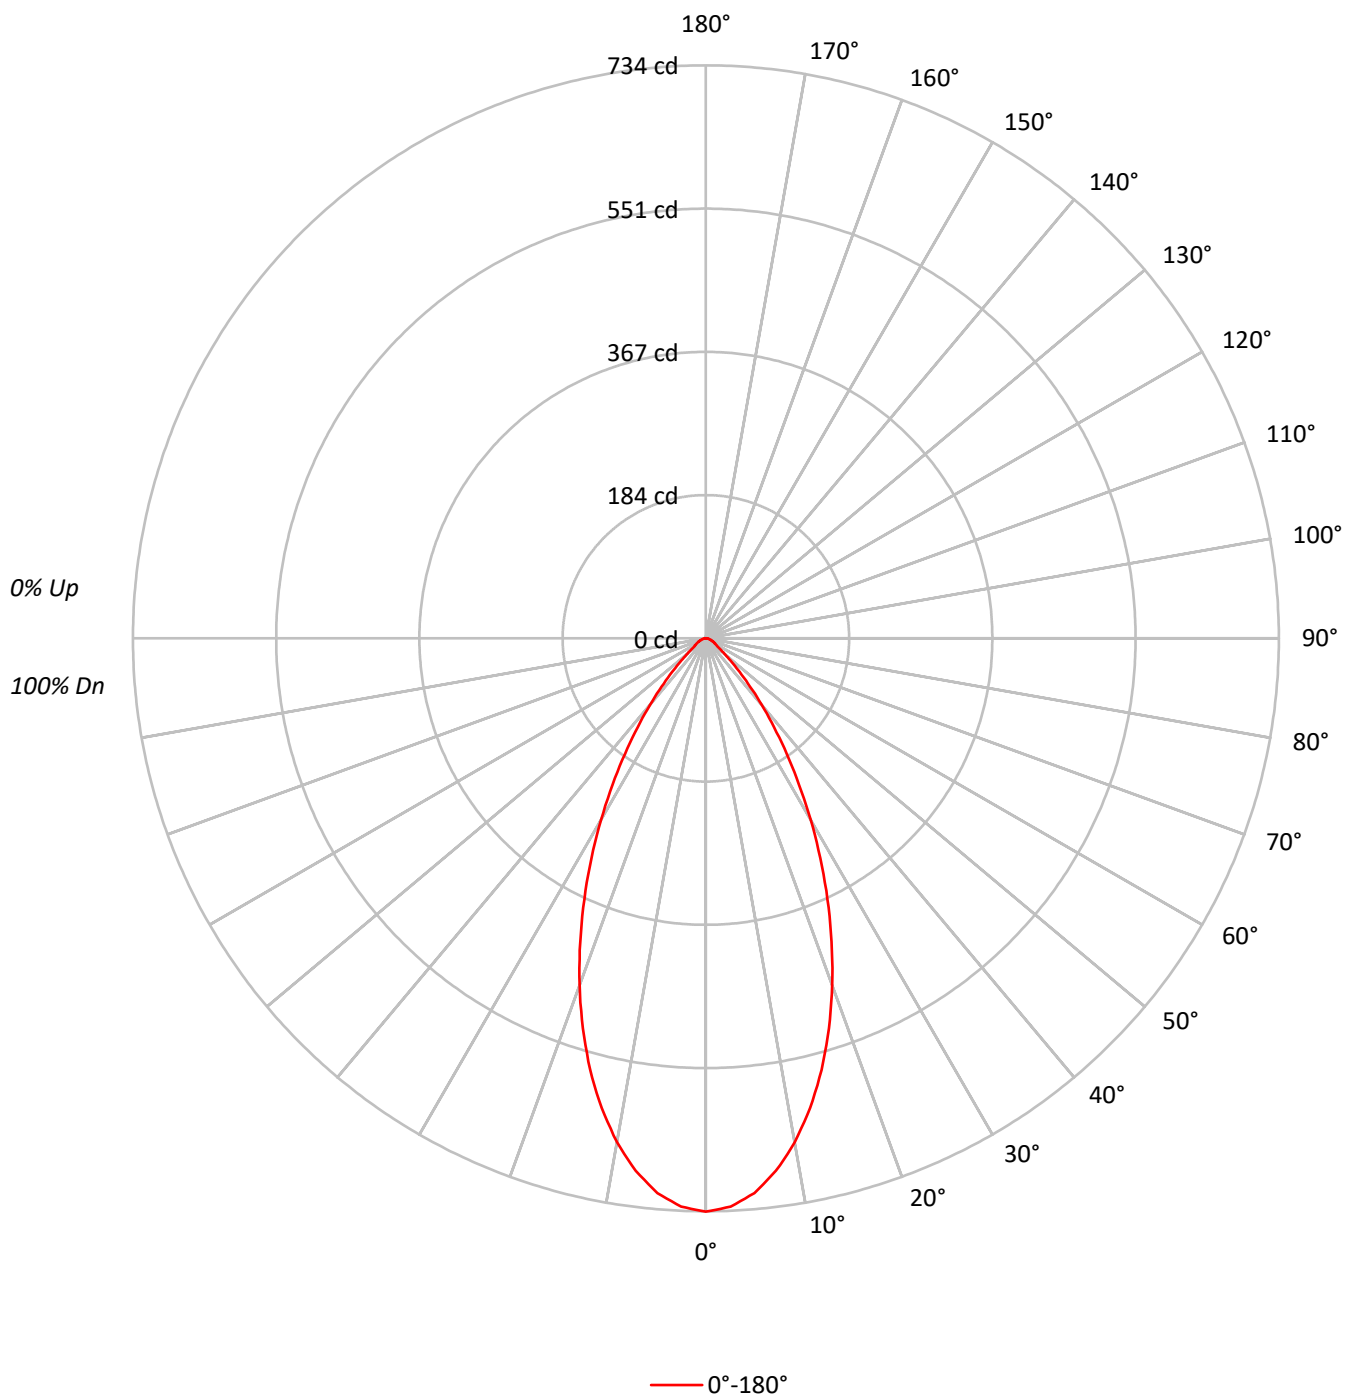

TEST NUMBER: P1262841

CATALOG NUMBER: P3AS13R559727DE010 E3DLP1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	110	108	105	103	104	102	100		100	98	97		97
2	107	102	97	94	105	100	96	93	97	93	91		94	91	89		91
3	101	94	89	85	99	93	88	84	90	86	83		88	84	81		85
4	96	88	82	77	94	87	81	77	84	80	76		82	78	75		80
5	91	82	76	71	89	81	75	71	79	74	70		77	73	70		76
6	86	77	70	66	84	76	70	66	74	69	65		73	68	65		72
7	82	72	66	61	80	71	65	61	70	65	61		69	64	60		68
8	78	68	62	57	76	67	61	57	66	61	57		65	60	57		64
9	74	64	58	54	73	63	58	54	62	57	53		62	57	53		61
10	70	60	55	51	69	60	54	50	59	54	50		58	54	50		58

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	161040
5°	157010
10°	145956
15°	129989
20°	110446
25°	89134
30°	67960
35°	48345
40°	31888
45°	18917
50°	11087
55°	6843
60°	6052
65°	5500
70°	4680
75°	4151
80°	4167
85°	4026

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 18917 cd/sqm

TEST NUMBER: P1262841

CATALOG NUMBER: P3AS13R559727DE010 E3DLP1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	66.2	11.2
10°-20°	158.7	26.8
20°-30°	168.1	28.4
30°-40°	113.6	19.2
40°-50°	49.8	8.4
50°-60°	17.8	3.0
60°-70°	10.4	1.8
70°-80°	5.5	0.9
80°-90°	1.8	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	393.1	66.4
0°-40°	506.7	85.6
0°-60°	574.3	97.0
0°-90°	592.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	592.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	734	
5°	713	66
15°	573	159
25°	368	168
35°	181	114
45°	61	50
55°	18	18
65°	11	10
75°	5	5
85°	2	2
90°	0	

TEST NUMBER: P1262841

CATALOG NUMBER: P3AS13R559727DE010 E3DLP1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	734.4
2.5°	728.7
5°	713.3
7.5°	688.1
10°	655.5
12.5°	616.5
15°	572.6
17.5°	523.8
20°	473.3
22.5°	420.5
25°	368.4
27.5°	317.2
30°	268.4
32.5°	222.0
35°	180.6
37.5°	143.1
40°	111.4
42.5°	83.8
45°	61.0
47.5°	44.7
50°	32.5
52.5°	22.8
55°	17.9
57.5°	16.3
60°	13.8
62.5°	12.2
65°	10.6
67.5°	8.9
70°	7.3
72.5°	6.5
75°	4.9
77.5°	4.1
80°	3.3
82.5°	2.4
85°	1.6
87.5°	0.8
90°	0.0

(END OF REPORT)