

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1262854

Luminaire Tested: P3AS13R609727DE010 E3DL1H

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1262854  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-39)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R609727DE010 E3DL1H  
Description: 3in Adjustable LED luminaire with, R60 optic, 2700K CCT AND, 97CRI , E3DL1H TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 856.0 lumens  
Efficiency: N/A  
Efficacy: 58.6 lumens/watt  
Spacing Criteria (0/90/45): 0.87 / 0.87 / 0.87  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 14.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1262854  
CATALOG NUMBER: P3AS13R609727DE010 E3DL1H

### Luminous Intensity Polar Plot

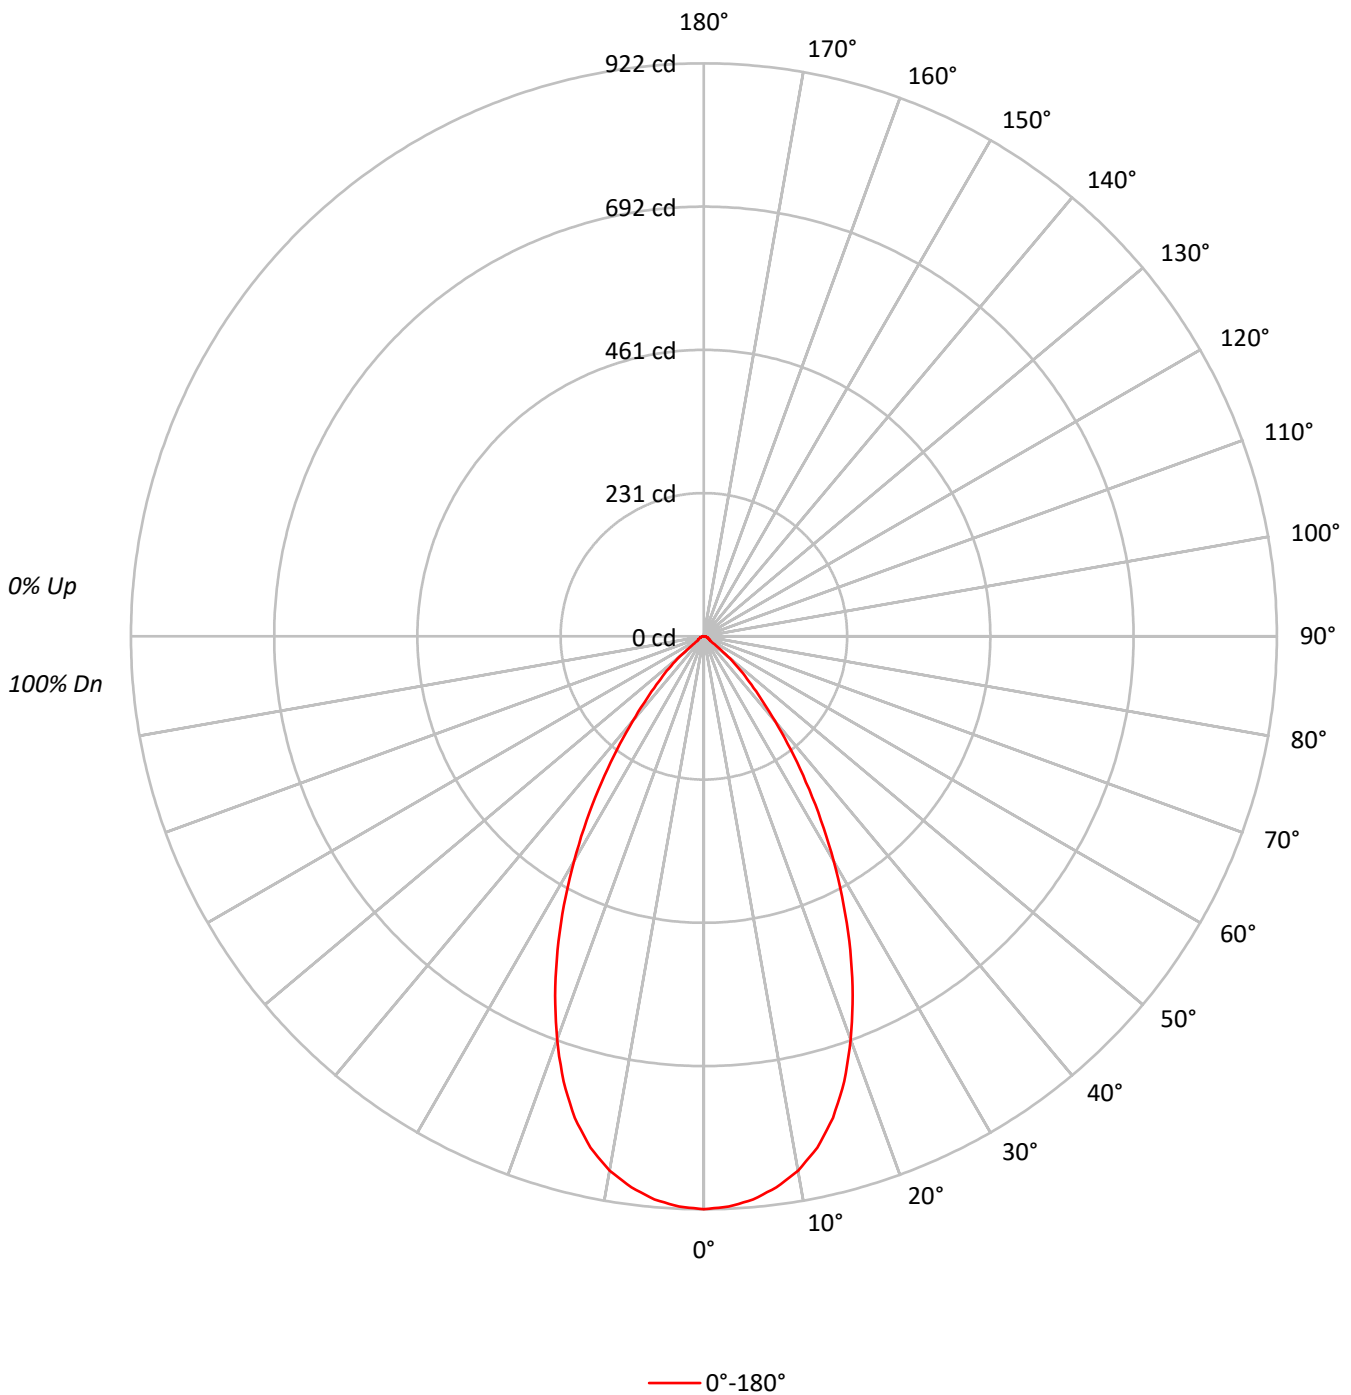



TEST NUMBER: P1262854  
 CATALOG NUMBER: P3AS13R609727DE010 E3DL1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	108	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93				93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85				85
3	101	95	89	85	99	93	88	84	91	86	83	88	85	82	86	83	80	79				79
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	75	73				73
5	91	82	76	71	89	81	75	71	79	74	70	78	73	70	76	72	69	68				68
6	86	77	70	66	84	76	70	66	74	69	65	73	68	65	72	68	64	63				63
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	68	63	60	59				59
8	77	68	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55				55
9	74	64	57	53	72	63	57	53	62	57	53	61	56	53	60	56	53	51				51
10	70	60	54	50	69	60	54	50	59	53	50	58	53	50	57	53	49	48				48

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	202133
5°	200220
10°	194385
15°	182112
20°	161177
25°	134838
30°	105687
35°	76667
40°	51010
45°	31786
50°	17193
55°	4970
60°	4649
65°	4203
70°	4167
75°	4151
80°	4167
85°	4026

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 31786 cd/sqm



TEST NUMBER: P1262854  
 CATALOG NUMBER: P3AS13R609727DE010 E3DL1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	85.7	10.0
10°-20°	222.6	26.0
20°-30°	253.7	29.6
30°-40°	179.9	21.0
40°-50°	81.6	9.5
50°-60°	17.3	2.0
60°-70°	8.3	1.0
70°-80°	5.2	0.6
80°-90°	1.8	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	561.9	65.6
0°-40°	741.8	86.7
0°-60°	840.7	98.2
0°-90°	856.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	856.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	922	
5°	910	86
15°	802	223
25°	557	254
35°	286	180
45°	102	82
55°	13	17
65°	8	8
75°	5	5
85°	2	2
90°	0	



TEST NUMBER: P1262854  
CATALOG NUMBER: P3AS13R609727DE010 E3DL1H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	921.8
2.5°	918.5
5°	909.6
7.5°	894.1
10°	873.0
12.5°	842.9
15°	802.2
17.5°	750.9
20°	690.7
22.5°	625.6
25°	557.3
27.5°	487.3
30°	417.4
32.5°	350.7
35°	286.4
37.5°	229.4
40°	178.2
42.5°	135.1
45°	102.5
47.5°	76.5
50°	50.4
52.5°	23.6
55°	13.0
57.5°	11.4
60°	10.6
62.5°	9.8
65°	8.1
67.5°	7.3
70°	6.5
72.5°	5.7
75°	4.9
77.5°	4.1
80°	3.3
82.5°	2.4
85°	1.6
87.5°	0.8
90°	0.0

(END OF REPORT)