

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1263050

Luminaire Tested: P3AS17R359727DE010 E3CD1MB

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1263050
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-20)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R359727DE010 E3CD1MB
Description: 3in Adjustable LED luminaire with, R35 optic, 2700K CCT AND, 97CRI , E3CD1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1369.1 lumens
Efficiency: N/A
Efficacy: 64.6 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.52
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1263050

CATALOG NUMBER: P3AS17R359727DE010 E3CD1MB

Luminous Intensity Polar Plot

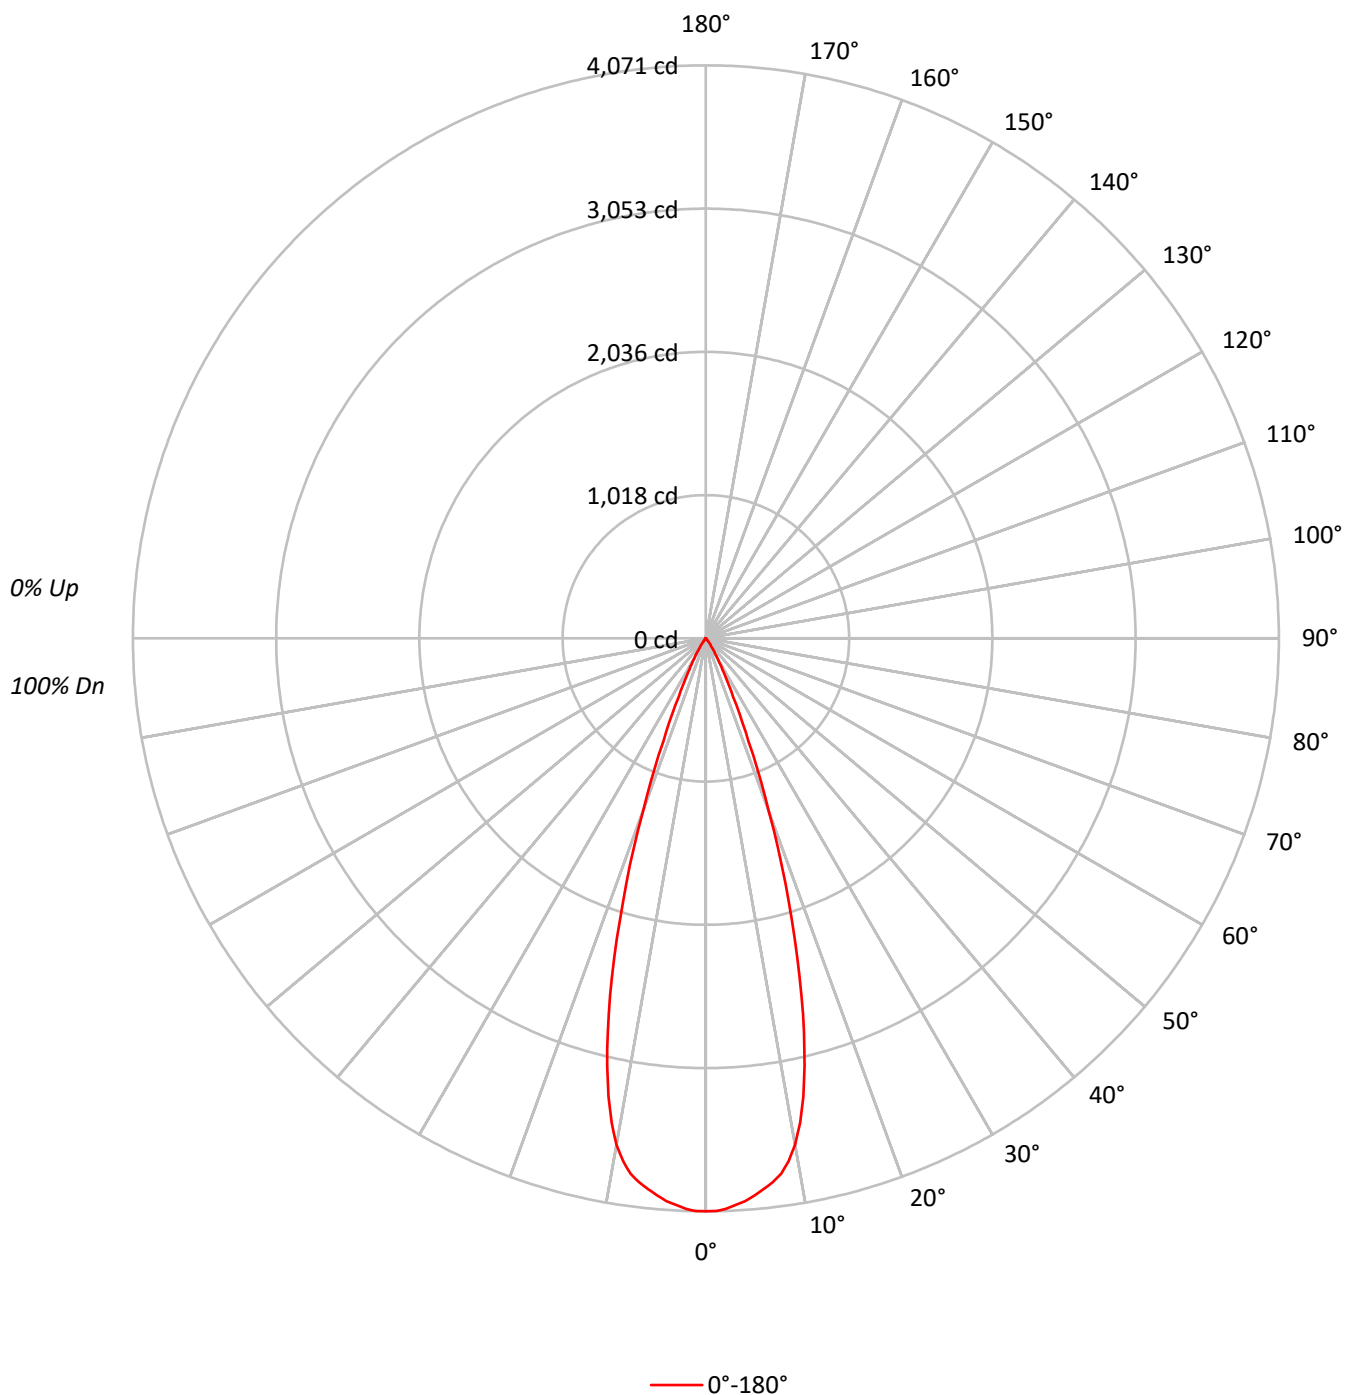

TEST NUMBER: P1263050

CATALOG NUMBER: P3AS17R359727DE010 E3CD1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	115	113	111	109		112	110	109	107		106	105	104		103	102	101		99	99	98
2	111	107	104	101		109	105	103	100		102	100	98		99	98	96		97	95	94
3	107	102	98	95		105	101	97	95		98	96	93		96	94	92		94	92	90
4	104	98	94	91		102	97	93	90		95	92	89		93	90	88		91	89	87
5	100	94	90	87		99	93	89	86		92	88	86		90	87	85		89	86	84
6	97	91	86	83		96	90	86	83		89	85	82		87	84	82		86	83	81
7	94	87	83	80		93	87	83	80		86	82	79		85	81	79		84	81	79
8	91	84	80	77		90	84	80	77		83	79	77		82	79	76		81	78	76
9	89	82	77	74		88	81	77	74		80	77	74		80	76	74		79	76	74
10	86	79	75	72		85	79	75	72		78	74	72		77	74	72		77	74	71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	892670
5°	874486
10°	813545
15°	596462
20°	305413
25°	110087
30°	42867
35°	15018
40°	6183
45°	1675
50°	1467
55°	1644
60°	1403
65°	1141
70°	1410
75°	1864
80°	1389
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 75°
Luminance: 1864 cd/sqm

TEST NUMBER: P1263050

CATALOG NUMBER: P3AS17R359727DE010 E3CD1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	370.4	27.1
10°-20°	694.9	50.8
20°-30°	246.0	18.0
30°-40°	43.1	3.1
40°-50°	6.3	0.5
50°-60°	3.5	0.3
60°-70°	2.5	0.2
70°-80°	1.9	0.1
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1311.3	95.8
0°-40°	1354.4	98.9
0°-60°	1364.2	99.6
0°-90°	1369.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1369.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4071	
5°	3973	370
15°	2627	695
25°	455	246
35°	56	43
45°	5	6
55°	4	3
65°	2	3
75°	2	2
85°	0	0
90°	0	

TEST NUMBER: P1263050

CATALOG NUMBER: P3AS17R359727DE010 E3CD1MB

CANDELA DISTRIBUTION (FULL):


0°	
0°	4070.9
1°	4069.9
2°	4056.9
3°	4032.1
4°	4009.5
5°	3972.8
6°	3935.1
7°	3893.1
8°	3841.3
9°	3760.4
10°	3653.7
11°	3506.0
12°	3328.1
13°	3116.8
14°	2883.9
15°	2627.4
17.5°	1956.8
20°	1308.8
22.5°	789.2
25°	455.0
27.5°	271.7
30°	169.3
32.5°	98.1
35°	56.1
37.5°	35.6
40°	21.6
42.5°	10.8
45°	5.4
47.5°	4.3
50°	4.3
52.5°	4.3
55°	4.3
57.5°	3.2
60°	3.2
62.5°	3.2
65°	2.2
67.5°	2.2
70°	2.2
72.5°	2.2
75°	2.2
77.5°	1.1
80°	1.1
82.5°	1.1
85°	0.0
87.5°	0.0



TEST NUMBER: P1263050

CATALOG NUMBER: P3AS17R359727DE010 E3CD1MB

CANDELA DISTRIBUTION (continued):



(END OF REPORT)