

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1263147

Luminaire Tested: P3AS17R509727DE010 E3DLD1H

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1263147
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-30)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R509727DE010 E3DLD1H
Description: 3in Adjustable LED luminaire with, R50 optic, 2700K CCT AND, 97CRI , E3DLD1H TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 944.0 lumens
Efficiency: N/A
Efficacy: 44.5 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.93
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1263147
CATALOG NUMBER: P3AS17R509727DE010 E3DLD1H

Luminous Intensity Polar Plot

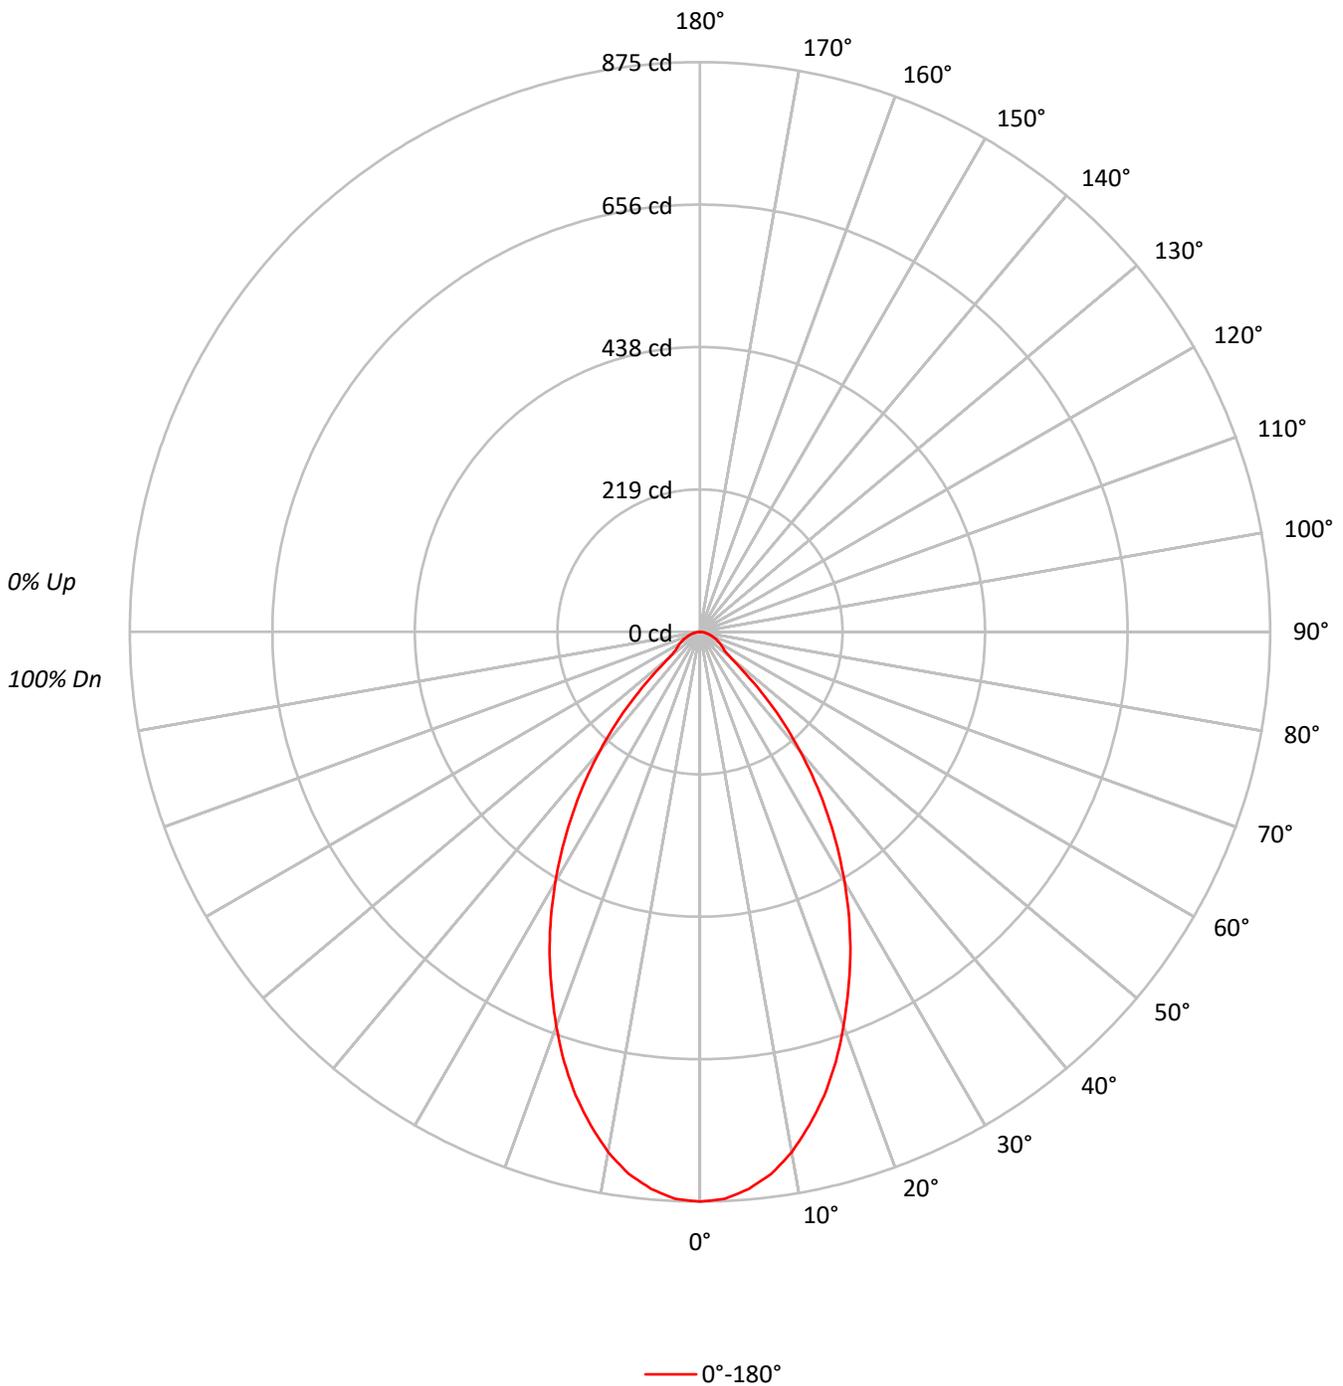



TEST NUMBER: P1263147
 CATALOG NUMBER: P3AS17R509727DE010 E3DLD1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	80.5	8.5
10°-20°	205.5	21.8
20°-30°	249.6	26.4
30°-40°	211.7	22.4
40°-50°	110.0	11.6
50°-60°	39.7	4.2
60°-70°	27.4	2.9
70°-80°	14.9	1.6
80°-90°	4.7	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	535.6	56.7
0°-40°	747.3	79.2
0°-60°	897.0	95.0
0°-90°	944.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	944.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	875	
5°	859	80
15°	737	205
25°	546	250
35°	340	212
45°	142	110
55°	43	40
65°	28	27
75°	14	15
85°	4	5
90°	0	



TEST NUMBER: P1263147
CATALOG NUMBER: P3AS17R509727DE010 E3DLD1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	874.9
2.5°	871.6
5°	858.7
7.5°	839.3
10°	811.3
12.5°	775.7
15°	736.9
17.5°	692.8
20°	644.3
22.5°	594.7
25°	546.2
27.5°	495.6
30°	443.9
32.5°	392.2
35°	340.5
37.5°	289.8
40°	239.2
42.5°	190.7
45°	142.2
47.5°	94.8
50°	61.4
52.5°	47.4
55°	43.1
57.5°	38.8
60°	35.6
62.5°	31.2
65°	28.0
67.5°	23.7
70°	20.5
72.5°	17.2
75°	14.0
77.5°	10.8
80°	8.6
82.5°	6.5
85°	4.3
87.5°	2.2
90°	0.0

(END OF REPORT)