

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1263371

Luminaire Tested: P3AS20R259727D010 E3D1WMH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1263371
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-9)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R259727D010 E3D1WMH
Description: 3in Adjustable LED luminaire with, R25 optic, 2700K CCT AND, 97CRI , E3D1WMH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1913.0 lumens
Efficiency: N/A
Efficacy: 66.4 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.4
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1263371
CATALOG NUMBER: P3AS20R259727D010 E3D1WMH

Luminous Intensity Polar Plot

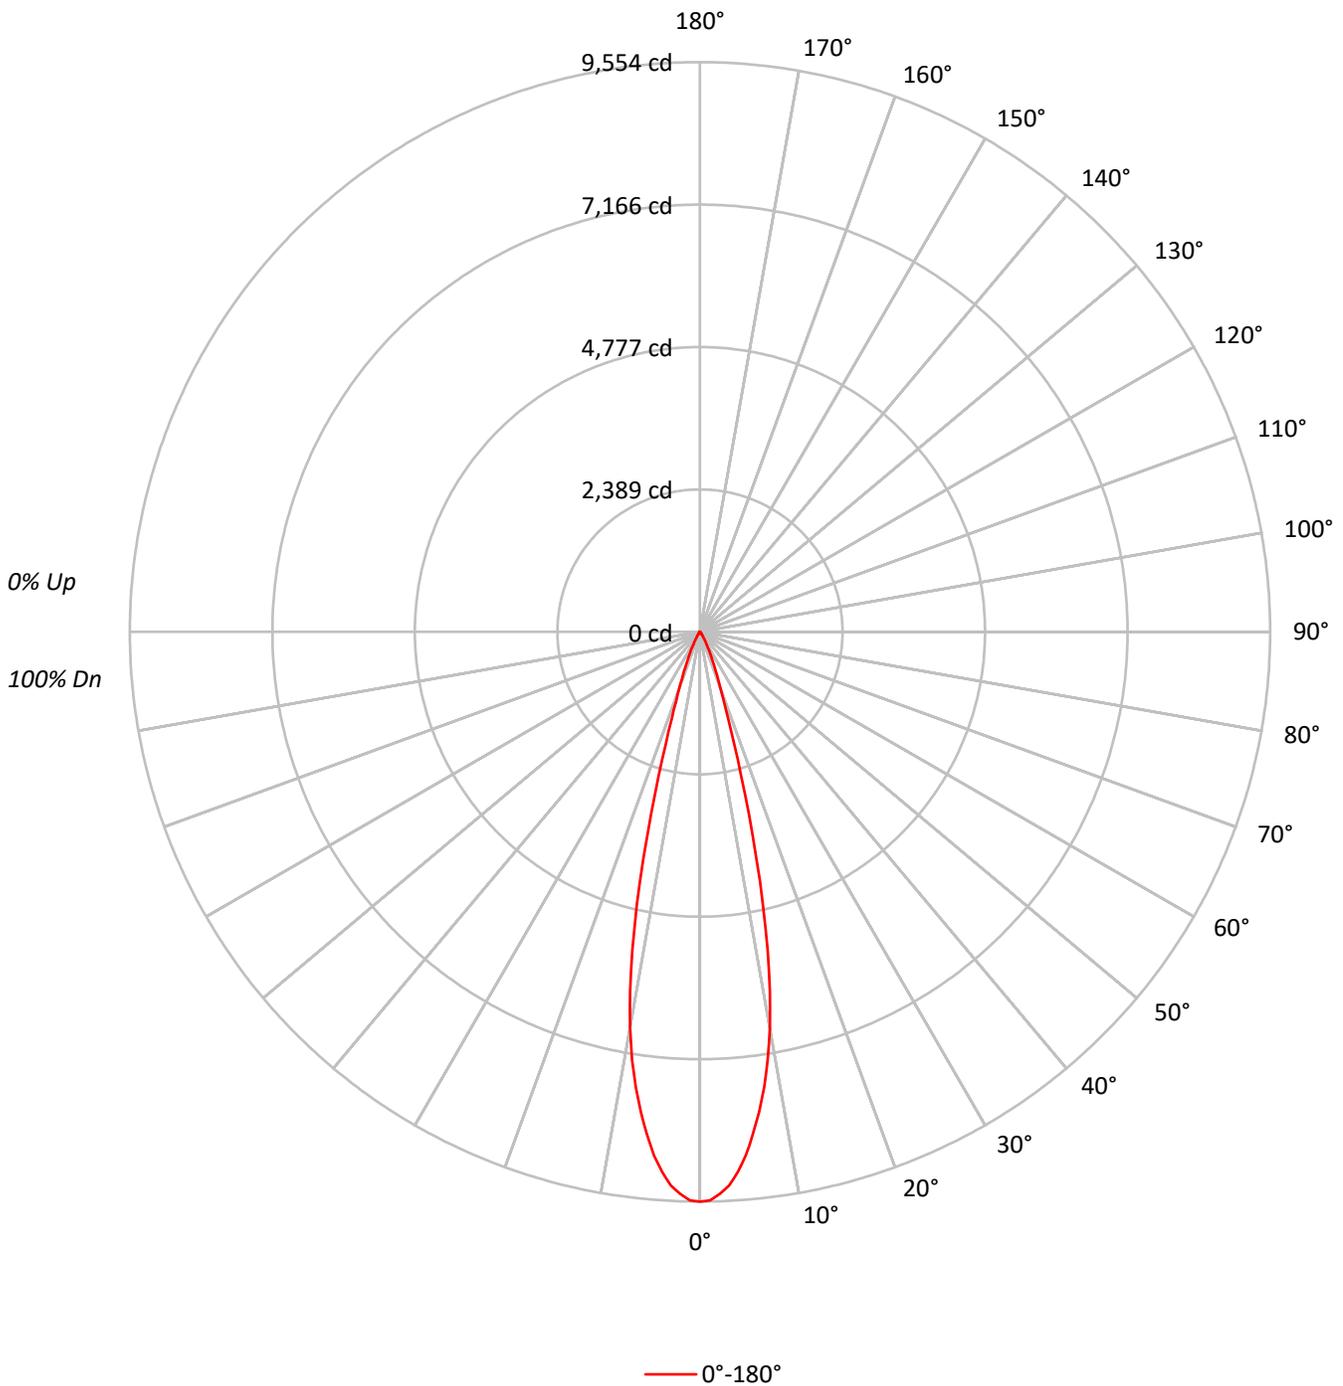



TEST NUMBER: P1263371
 CATALOG NUMBER: P3AS20R259727D010 E3D1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	99	100
1	115	113	111	110	113	111	110	108	107	106	105	104	103	102	100	99	99	97	97	97	97
2	112	108	106	103	110	107	104	102	104	102	100	101	99	98	98	97	96	96	96	96	94
3	109	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	96	94	93	92
4	106	101	97	94	104	100	96	94	98	95	92	96	93	91	94	92	90	94	92	90	89
5	103	97	93	91	101	96	93	90	95	92	90	93	91	89	92	90	88	92	90	88	87
6	100	94	90	88	99	94	90	87	92	89	87	91	88	86	90	88	86	90	88	86	85
7	98	92	88	85	97	91	87	85	90	87	84	89	86	84	88	86	84	88	86	84	83
8	95	89	85	83	94	89	85	83	88	85	82	87	84	82	86	84	82	86	84	82	81
9	93	87	83	81	92	86	83	80	86	83	80	85	82	80	84	82	80	84	82	80	79
10	91	85	81	79	90	84	81	79	84	81	78	83	80	78	83	80	78	83	80	78	77

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2095095
5°	1940805
10°	1501620
15°	717235
20°	236481
25°	99683
30°	38639
35°	16704
40°	5553
45°	2574
50°	955
55°	535
60°	307
65°	363
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2574 cd/sqm



TEST NUMBER: P1263371
 CATALOG NUMBER: P3AS20R259727D010 E3D1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	775.0	40.5
10°-20°	881.5	46.1
20°-30°	204.8	10.7
30°-40°	43.0	2.2
40°-50°	7.0	0.4
50°-60°	1.2	0.1
60°-70°	0.6	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1861.3	97.3
0°-40°	1904.3	99.5
0°-60°	1912.4	100.0
0°-90°	1913.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1913.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	9554	
5°	8817	775
15°	3159	881
25°	412	205
35°	62	43
45°	8	7
55°	1	1
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1263371
CATALOG NUMBER: P3AS20R259727D010 E3D1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	9554.4
1°	9535.0
2°	9435.8
3°	9296.4
4°	9083.4
5°	8817.1
6°	8475.1
7°	8117.2
8°	7715.6
9°	7262.7
10°	6743.9
11°	6142.6
12°	5452.4
13°	4696.4
14°	3905.7
15°	3159.4
16°	2499.1
17°	1946.9
18°	1531.5
19°	1224.9
20°	1013.4
21°	846.9
22°	710.9
23°	593.7
24°	496.6
25°	412.0
27.5°	244.1
30°	152.6
32.5°	97.8
35°	62.4
37.5°	37.5
40°	19.4
42.5°	12.5
45°	8.3
47.5°	4.9
50°	2.8
52.5°	1.4
55°	1.4
57.5°	0.7
60°	0.7
62.5°	0.7
65°	0.7
67.5°	0.7
70°	0.0
72.5°	0.0



TEST NUMBER: P1263371
CATALOG NUMBER: P3AS20R259727D010 E3D1WMH

CANDELA DISTRIBUTION (continued):

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)