

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1263407

Luminaire Tested: P3AS20R309727D010 E3DL1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1263407
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R309727D010 E3DL1MW
Description: 3in Adjustable LED luminaire with, R30 optic, 2700K CCT AND, 97CRI , E3DL1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1498.0 lumens
Efficiency: N/A
Efficacy: 52.0 lumens/watt
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1263407

CATALOG NUMBER: P3AS20R309727D010 E3DL1MW

Luminous Intensity Polar Plot

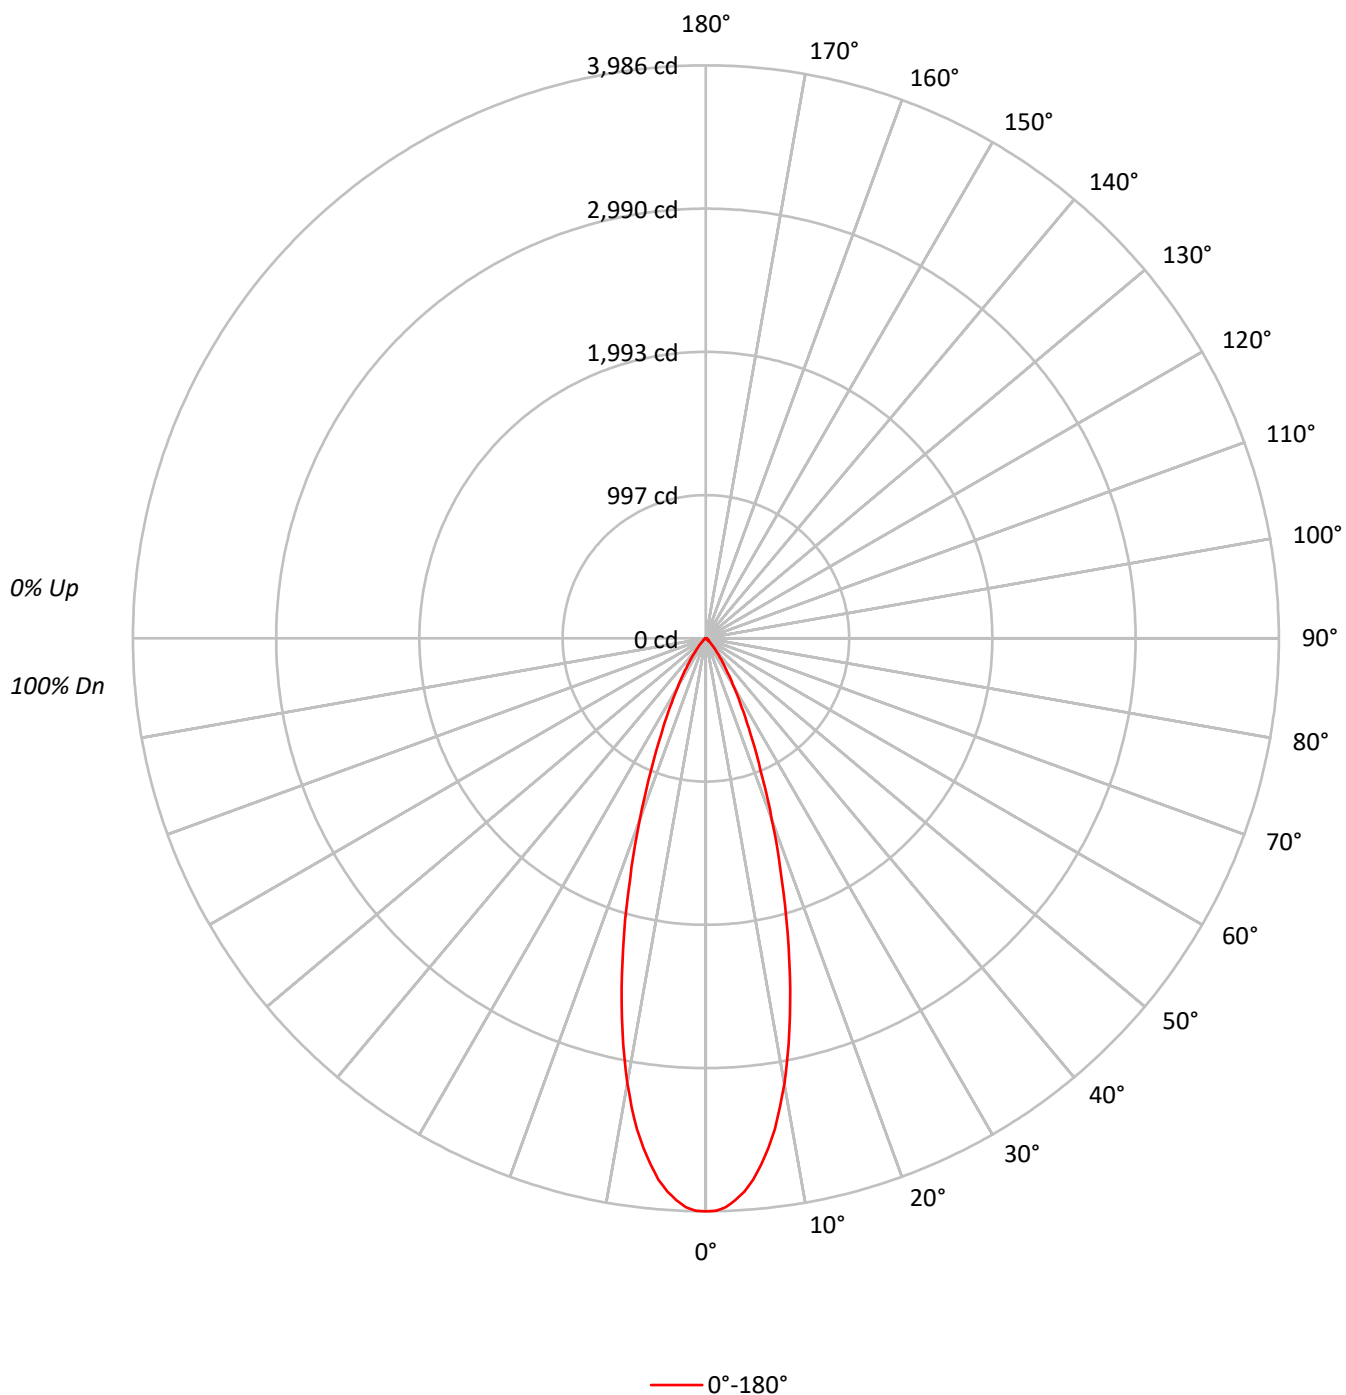

TEST NUMBER: P1263407

CATALOG NUMBER: P3AS20R309727D010 E3DL1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99
2	110	105	102	99	107	104	101	98	101	98	96		98	96	94		95
3	105	100	96	92	103	98	95	91	96	93	90		94	91	89		91
4	101	95	90	87	99	94	89	86	92	88	85		90	87	84		88
5	97	90	85	82	96	89	85	81	88	84	81		86	83	80		85
6	94	86	81	78	92	85	81	77	84	80	77		83	79	76		81
7	90	82	77	74	89	82	77	74	81	76	73		80	76	73		79
8	87	79	74	71	86	79	74	71	78	73	70		77	73	70		76
9	84	76	71	68	83	75	71	68	75	70	67		74	70	67		73
10	81	73	68	65	80	73	68	65	72	68	65		71	67	65		71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	874119
5°	831981
10°	699809
15°	504679
20°	313044
25°	178051
30°	98901
35°	53779
40°	28367
45°	15350
50°	8221
55°	5429
60°	4956
65°	5137
70°	4552
75°	3558
80°	3536
85°	3522

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 15350 cd/sqm

TEST NUMBER: P1263407

CATALOG NUMBER: P3AS20R309727D010 E3DL1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	340.3	22.7
10°-20°	605.0	40.4
20°-30°	349.7	23.3
30°-40°	132.7	8.9
40°-50°	40.7	2.7
50°-60°	13.7	0.9
60°-70°	9.3	0.6
70°-80°	5.0	0.3
80°-90°	1.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1295.0	86.4
0°-40°	1427.7	95.3
0°-60°	1482.1	98.9
0°-90°	1498.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1498.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3986	
5°	3780	340
15°	2223	605
25°	736	350
35°	201	133
45°	50	41
55°	14	14
65°	10	9
75°	4	5
85°	1	2
90°	0	

TEST NUMBER: P1263407

CATALOG NUMBER: P3AS20R309727D010 E3DL1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	3986.3
1°	3983.5
2°	3959.5
3°	3914.2
4°	3857.6
5°	3779.7
6°	3680.7
7°	3570.3
8°	3447.2
9°	3300.0
10°	3142.9
11°	2973.1
12°	2793.4
13°	2605.2
14°	2414.2
15°	2223.1
17.5°	1753.3
20°	1341.5
22.5°	994.8
25°	735.9
27.5°	534.9
30°	390.6
32.5°	281.6
35°	200.9
37.5°	140.1
40°	99.1
42.5°	69.3
45°	49.5
47.5°	34.0
50°	24.1
52.5°	17.0
55°	14.2
57.5°	12.7
60°	11.3
62.5°	9.9
65°	9.9
67.5°	8.5
70°	7.1
72.5°	5.7
75°	4.2
77.5°	4.2
80°	2.8
82.5°	2.8
85°	1.4
87.5°	0.0



TEST NUMBER: P1263407

CATALOG NUMBER: P3AS20R309727D010 E3DL1MW

CANDELA DISTRIBUTION (continued):



(END OF REPORT)