

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1263500

Luminaire Tested: P3AS20R459727D010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1263500
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-26)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R459727D010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R45 optic, 2700K CCT AND, 97CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1228.0 lumens
Efficiency: N/A
Efficacy: 42.6 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.92
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1263500

CATALOG NUMBER: P3AS20R459727D010 E3DLD1WMH

Luminous Intensity Polar Plot

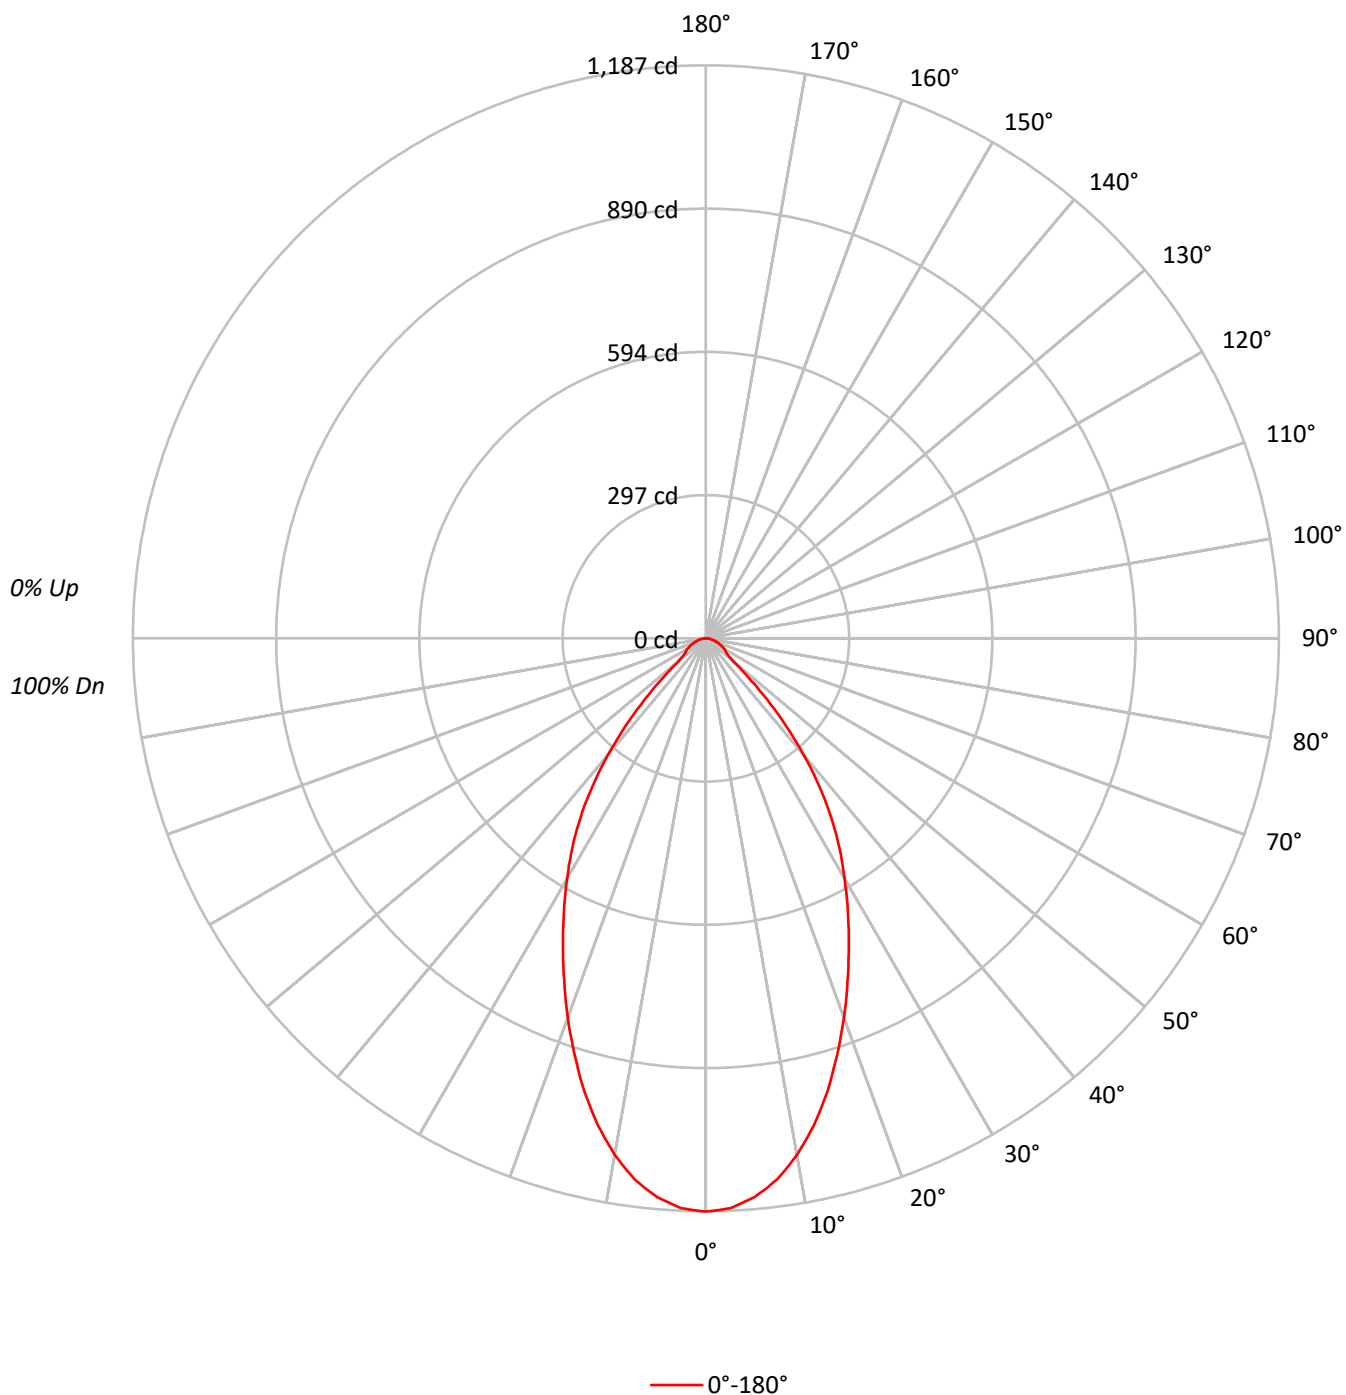

TEST NUMBER: P1263500

CATALOG NUMBER: P3AS20R459727D010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	97	96		96
2	106	100	95	91	103	98	94	90	95	91	88		92	89	86		89
3	99	92	86	82	97	90	85	81	88	83	80		85	81	78		83
4	94	85	78	74	92	84	78	73	81	76	72		79	75	71		77
5	88	79	72	67	86	78	71	67	76	70	66		74	69	65		72
6	83	73	66	61	81	72	66	61	71	65	61		69	64	60		68
7	78	68	61	57	77	67	61	56	66	60	56		65	60	56		64
8	74	64	57	52	73	63	57	52	62	56	52		61	56	52		60
9	70	60	53	49	69	59	53	49	58	52	48		57	52	48		56
10	67	56	50	45	66	56	49	45	55	49	45		54	49	45		53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	260374
5°	255755
10°	242013
15°	220705
20°	195177
25°	169486
30°	145491
35°	121238
40°	90341
45°	55293
50°	25586
55°	20033
60°	19253
65°	17641
70°	16349
75°	15589
80°	14269
85°	10567

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 55293 cd/sqm

TEST NUMBER: P1263500

CATALOG NUMBER: P3AS20R459727D010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	108.5	8.8
10°-20°	270.7	22.0
20°-30°	321.6	26.2
30°-40°	279.4	22.8
40°-50°	140.1	11.4
50°-60°	48.7	4.0
60°-70°	34.1	2.8
70°-80°	19.0	1.6
80°-90°	5.8	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	700.8	57.1
0°-40°	980.3	79.8
0°-60°	1169.1	95.2
0°-90°	1228.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1228.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1187	
5°	1162	109
15°	972	271
25°	700	322
35°	453	279
45°	178	140
55°	52	49
65°	34	34
75°	18	19
85°	4	6
90°	0	



TEST NUMBER: P1263500

CATALOG NUMBER: P3AS20R459727D010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1187.4
2.5°	1181.7
5°	1161.9
7.5°	1130.7
10°	1086.9
12.5°	1033.1
15°	972.2
17.5°	904.3
20°	836.4
22.5°	767.0
25°	700.5
27.5°	636.8
30°	574.6
32.5°	515.1
35°	452.9
37.5°	386.3
40°	315.6
42.5°	246.2
45°	178.3
47.5°	117.5
50°	75.0
52.5°	58.0
55°	52.4
57.5°	48.1
60°	43.9
62.5°	39.6
65°	34.0
67.5°	29.7
70°	25.5
72.5°	21.2
75°	18.4
77.5°	14.2
80°	11.3
82.5°	8.5
85°	4.2
87.5°	2.8
90°	0.0

(END OF REPORT)