

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1263574

Luminaire Tested: P3AS20R609727D010 E3D1WH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1263574
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R609727D010 E3D1WH
Description: 3in Adjustable LED luminaire with, R60 optic, 2700K CCT AND, 97CRI , E3D1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1696.0 lumens
Efficiency: N/A
Efficacy: 58.9 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1263574

CATALOG NUMBER: P3AS20R609727D010 E3D1WH

Luminous Intensity Polar Plot

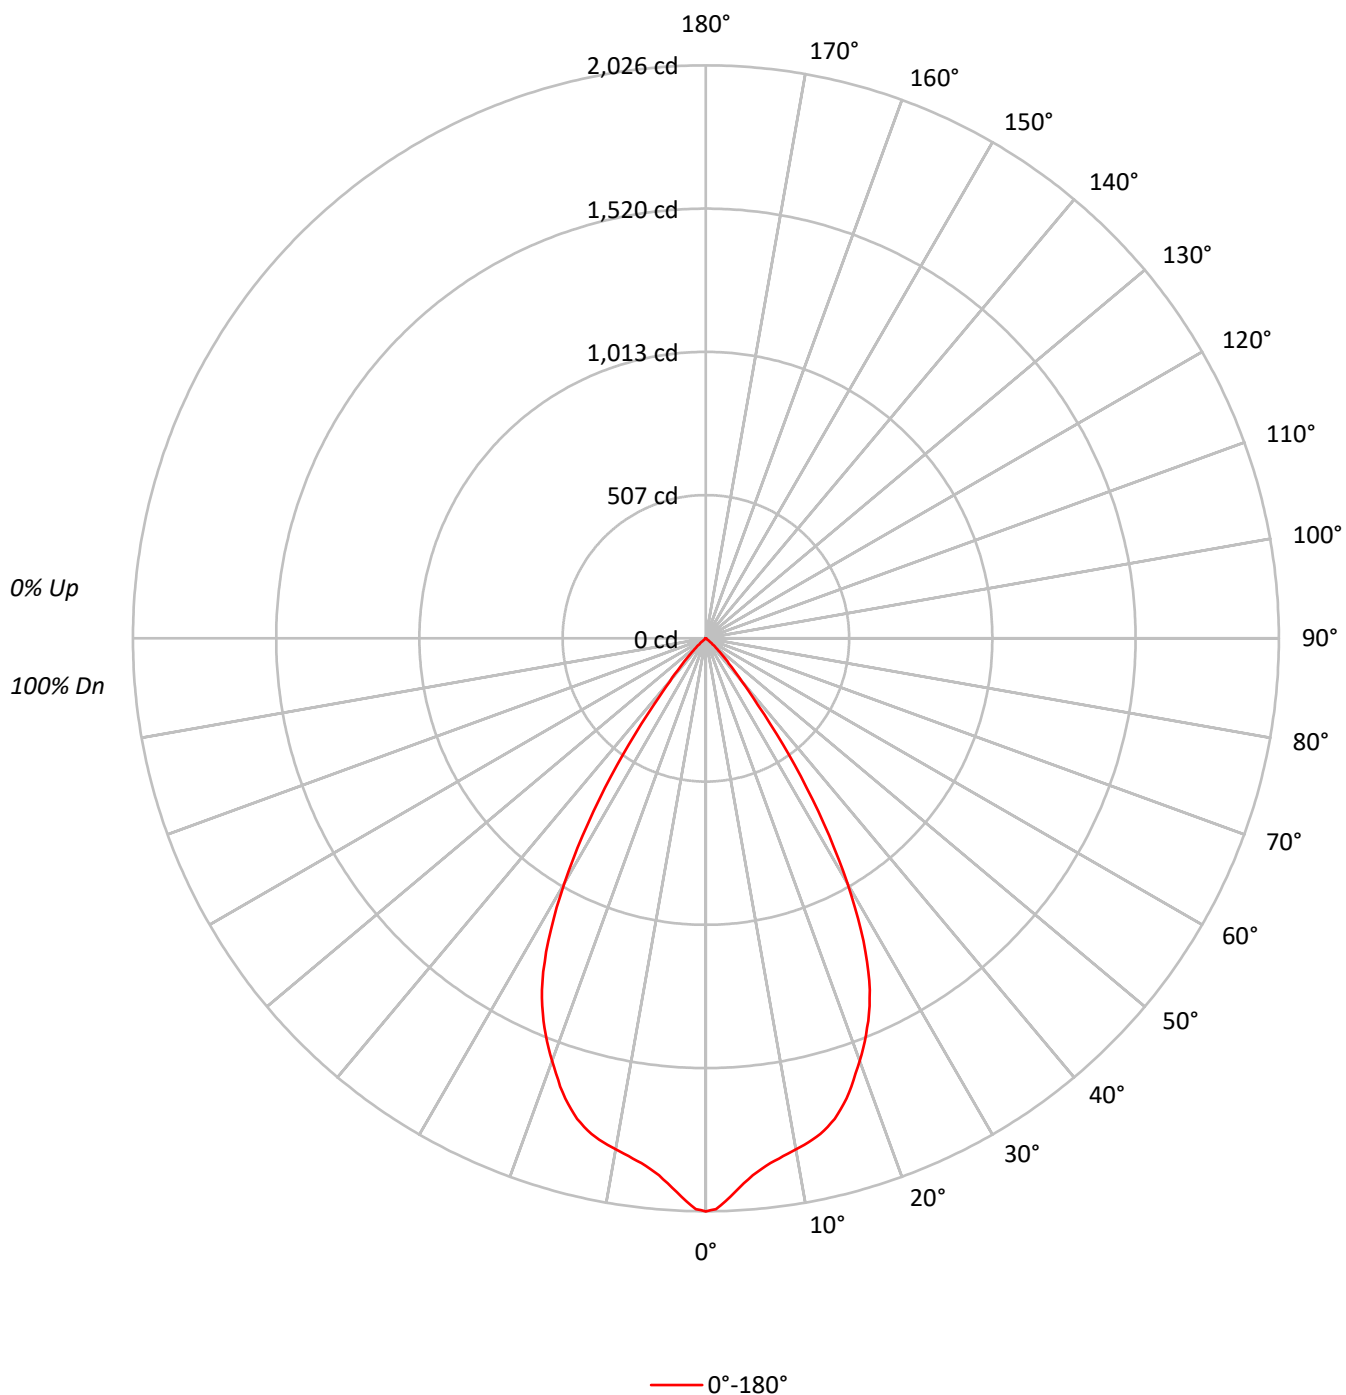

TEST NUMBER: P1263574

CATALOG NUMBER: P3AS20R609727D010 E3D1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	106	111	109	107	105	105	103	102		101	100	99		98
2	108	104	100	96	106	102	98	95	99	96	93		96	93	91		93
3	103	97	92	88	101	96	91	88	93	89	86		91	87	85		88
4	98	91	85	81	96	90	85	81	88	83	80		86	82	79		84
5	93	85	80	75	92	84	79	75	83	78	74		81	77	74		79
6	89	80	74	70	87	79	74	70	78	73	70		77	72	69		75
7	85	76	70	66	83	75	69	65	74	69	65		72	68	65		71
8	81	71	65	61	79	71	65	61	70	65	61		69	64	61		68
9	77	67	62	58	76	67	61	58	66	61	57		65	61	57		64
10	73	64	58	54	72	63	58	54	63	58	54		62	57	54		61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	444372
5°	419501
10°	408587
15°	399253
20°	371219
25°	331858
30°	253482
35°	146347
40°	56792
45°	23661
50°	5219
55°	803
60°	614
65°	363
70°	449
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 23661 cd/sqm

TEST NUMBER: P1263574

CATALOG NUMBER: P3AS20R609727D010 E3D1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	179.9	10.6
10°-20°	489.9	28.9
20°-30°	613.6	36.2
30°-40°	343.0	20.2
40°-50°	65.2	3.8
50°-60°	3.4	0.2
60°-70°	0.8	0.0
70°-80°	0.3	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1283.4	75.7
0°-40°	1626.4	95.9
0°-60°	1695.0	99.9
0°-90°	1696.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1696.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2026	
5°	1906	180
15°	1759	490
25°	1372	614
35°	547	343
45°	76	65
55°	2	3
65°	1	1
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1263574

CATALOG NUMBER: P3AS20R609727D010 E3D1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	2026.5
1°	2018.2
2°	1991.8
3°	1960.6
4°	1931.5
5°	1905.8
6°	1886.4
7°	1869.7
8°	1857.2
9°	1845.4
10°	1835.0
11°	1824.6
12°	1812.8
13°	1798.3
14°	1780.9
15°	1758.7
16°	1731.7
17°	1701.1
18°	1666.4
19°	1626.9
20°	1590.8
21°	1552.0
22°	1511.7
23°	1469.4
24°	1422.9
25°	1371.6
26°	1311.2
27°	1243.9
28°	1168.3
29°	1087.8
30°	1001.1
31°	913.7
32°	823.5
32.5°	774.3
33°	729.9
34°	637.6
35°	546.7
36°	464.8
37°	378.1
37.5°	338.6
38°	299.7
39°	241.4
40°	198.4
42.5°	120.7
45°	76.3

TEST NUMBER: P1263574

CATALOG NUMBER: P3AS20R609727D010 E3D1WH

CANDELA DISTRIBUTION (continued):

	0°
47.5°	42.3
50°	15.3
52.5°	3.5
55°	2.1
57.5°	1.4
60°	1.4
62.5°	0.7
65°	0.7
67.5°	0.7
70°	0.7
72.5°	0.7
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)