

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1263623

Luminaire Tested: P3AS20R709727D010 E3CB1MB

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1263623
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-48)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R709727D010 E3CB1MB
Description: 3in Adjustable LED luminaire with, R70 optic, 2700K CCT AND, 97CRI , E3CB1MB TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1770.0 lumens
Efficiency: N/A
Efficacy: 61.5 lumens/watt
Spacing Criteria (0/90/45): 1.01 / 1.01 / 1.03
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1263623
CATALOG NUMBER: P3AS20R709727D010 E3CB1MB

Luminous Intensity Polar Plot

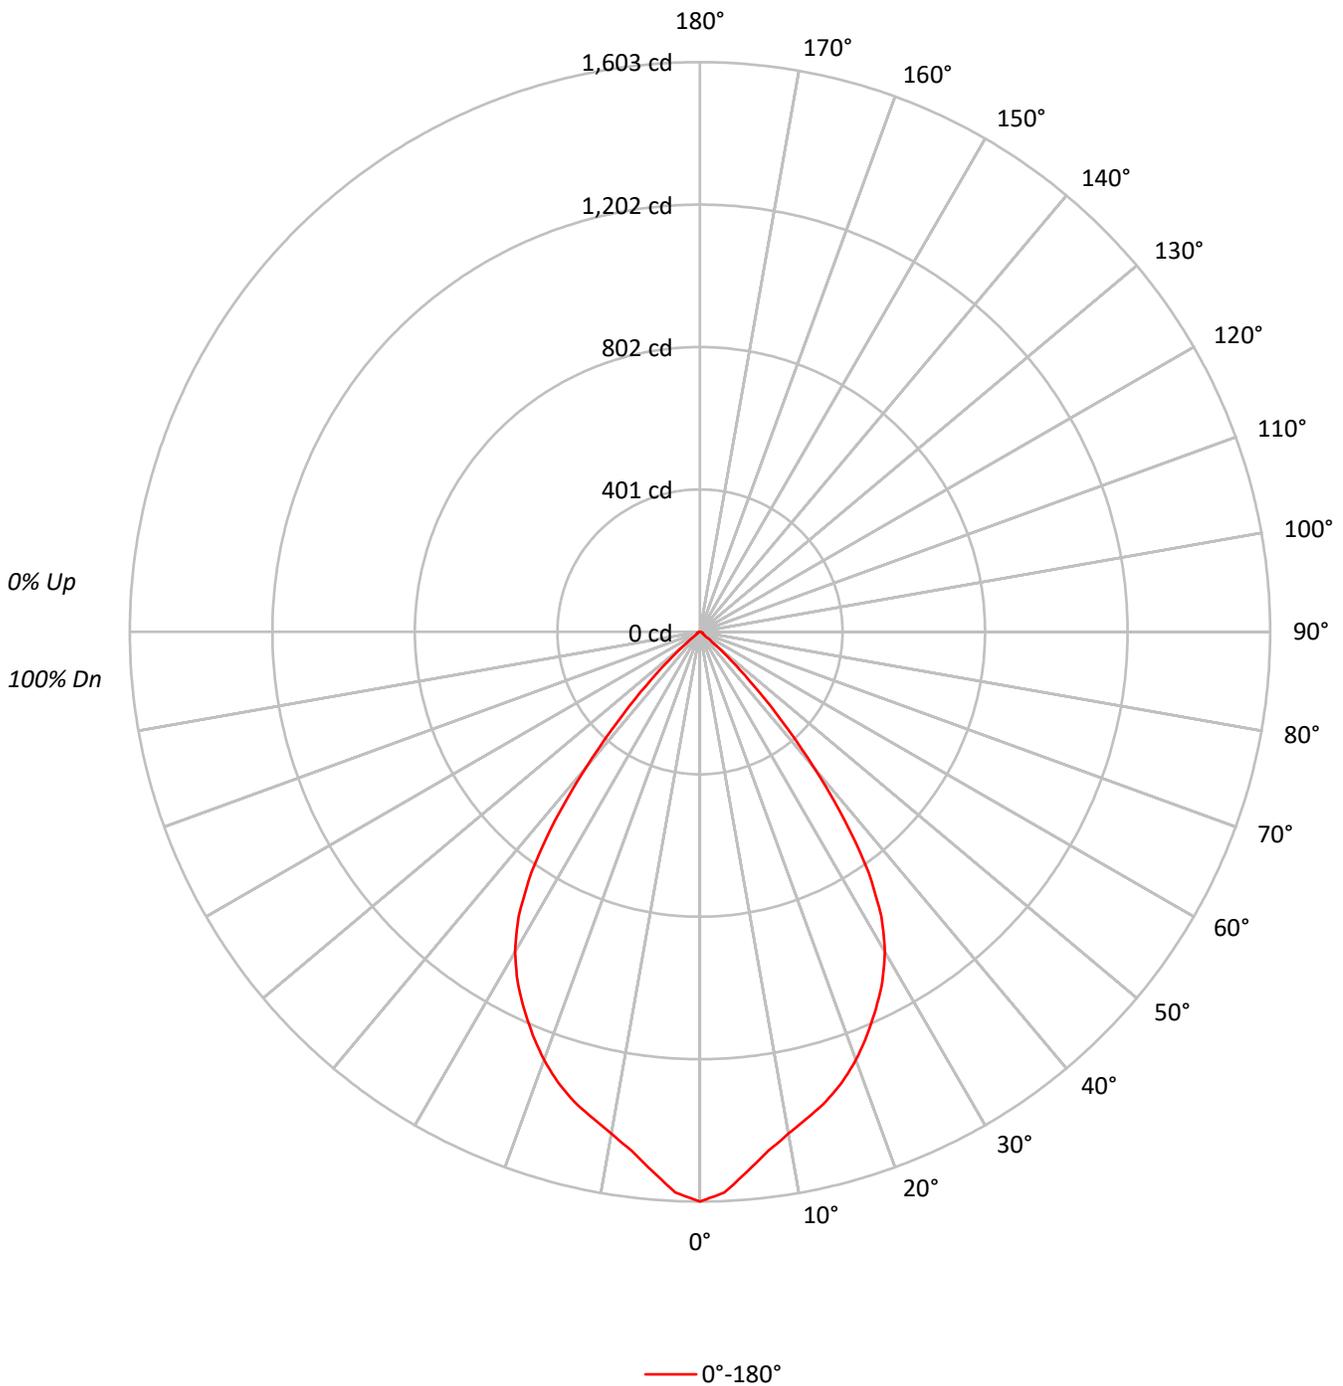



TEST NUMBER: P1263623
 CATALOG NUMBER: P3AS20R709727D010 E3CB1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93				93
2	107	102	97	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85				85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	81	85	82	80	78				78
4	95	87	81	77	94	86	81	76	84	79	75	82	78	75	80	77	74	72				72
5	90	81	75	70	88	80	74	70	78	73	69	77	72	69	75	71	68	66				66
6	85	75	69	64	83	75	69	64	73	68	64	72	67	63	70	66	63	61				61
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57				57
8	76	66	59	55	75	65	59	55	64	58	55	63	58	54	62	57	54	53				53
9	72	62	55	51	71	61	55	51	60	55	51	59	54	50	58	54	50	49				49
10	68	58	52	47	67	57	51	47	56	51	47	56	51	47	55	50	47	46				46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	351463
5°	335372
10°	319099
15°	310558
20°	299089
25°	283081
30°	263281
35°	221167
40°	142553
45°	66239
50°	17364
55°	4320
60°	4342
65°	3684
70°	3654
75°	3558
80°	3536
85°	3522

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 66239 cd/sqm



TEST NUMBER: P1263623
 CATALOG NUMBER: P3AS20R709727D010 E3CB1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	142.6	8.1
10°-20°	384.4	21.7
20°-30°	537.1	30.3
30°-40°	498.0	28.1
40°-50°	178.5	10.1
50°-60°	15.1	0.9
60°-70°	7.5	0.4
70°-80°	4.8	0.3
80°-90°	1.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1064.1	60.1
0°-40°	1562.1	88.3
0°-60°	1755.7	99.2
0°-90°	1770.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1770.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1603	
5°	1524	143
15°	1368	384
25°	1170	537
35°	826	498
45°	214	179
55°	11	15
65°	7	8
75°	4	5
85°	1	2
90°	0	



TEST NUMBER: P1263623
CATALOG NUMBER: P3AS20R709727D010 E3CB1MB

CANDELA DISTRIBUTION (FULL):

	0°
0°	1602.8
2.5°	1578.8
5°	1523.6
7.5°	1472.7
10°	1433.1
12.5°	1400.5
15°	1368.0
17.5°	1328.4
20°	1281.7
22.5°	1228.0
25°	1170.0
27.5°	1110.5
30°	1039.8
32.5°	949.3
35°	826.2
37.5°	669.2
40°	498.0
42.5°	339.5
45°	213.6
47.5°	118.8
50°	50.9
52.5°	17.0
55°	11.3
57.5°	9.9
60°	9.9
62.5°	8.5
65°	7.1
67.5°	7.1
70°	5.7
72.5°	5.7
75°	4.2
77.5°	4.2
80°	2.8
82.5°	2.8
85°	1.4
87.5°	1.4
90°	0.0

(END OF REPORT)