

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1263861

Luminaire Tested: P3AS02R309730DE010 E3DL1H

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1263861
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R309730DE010 E3DL1H
Description: 3in Adjustable LED luminaire with, R30 optic, 3000K CCT AND, 97CRI , E3DL1H TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 231.0 lumens
Efficiency: N/A
Efficacy: 64.2 lumens/watt
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1263861

CATALOG NUMBER: P3AS02R309730DE010 E3DL1H

Luminous Intensity Polar Plot

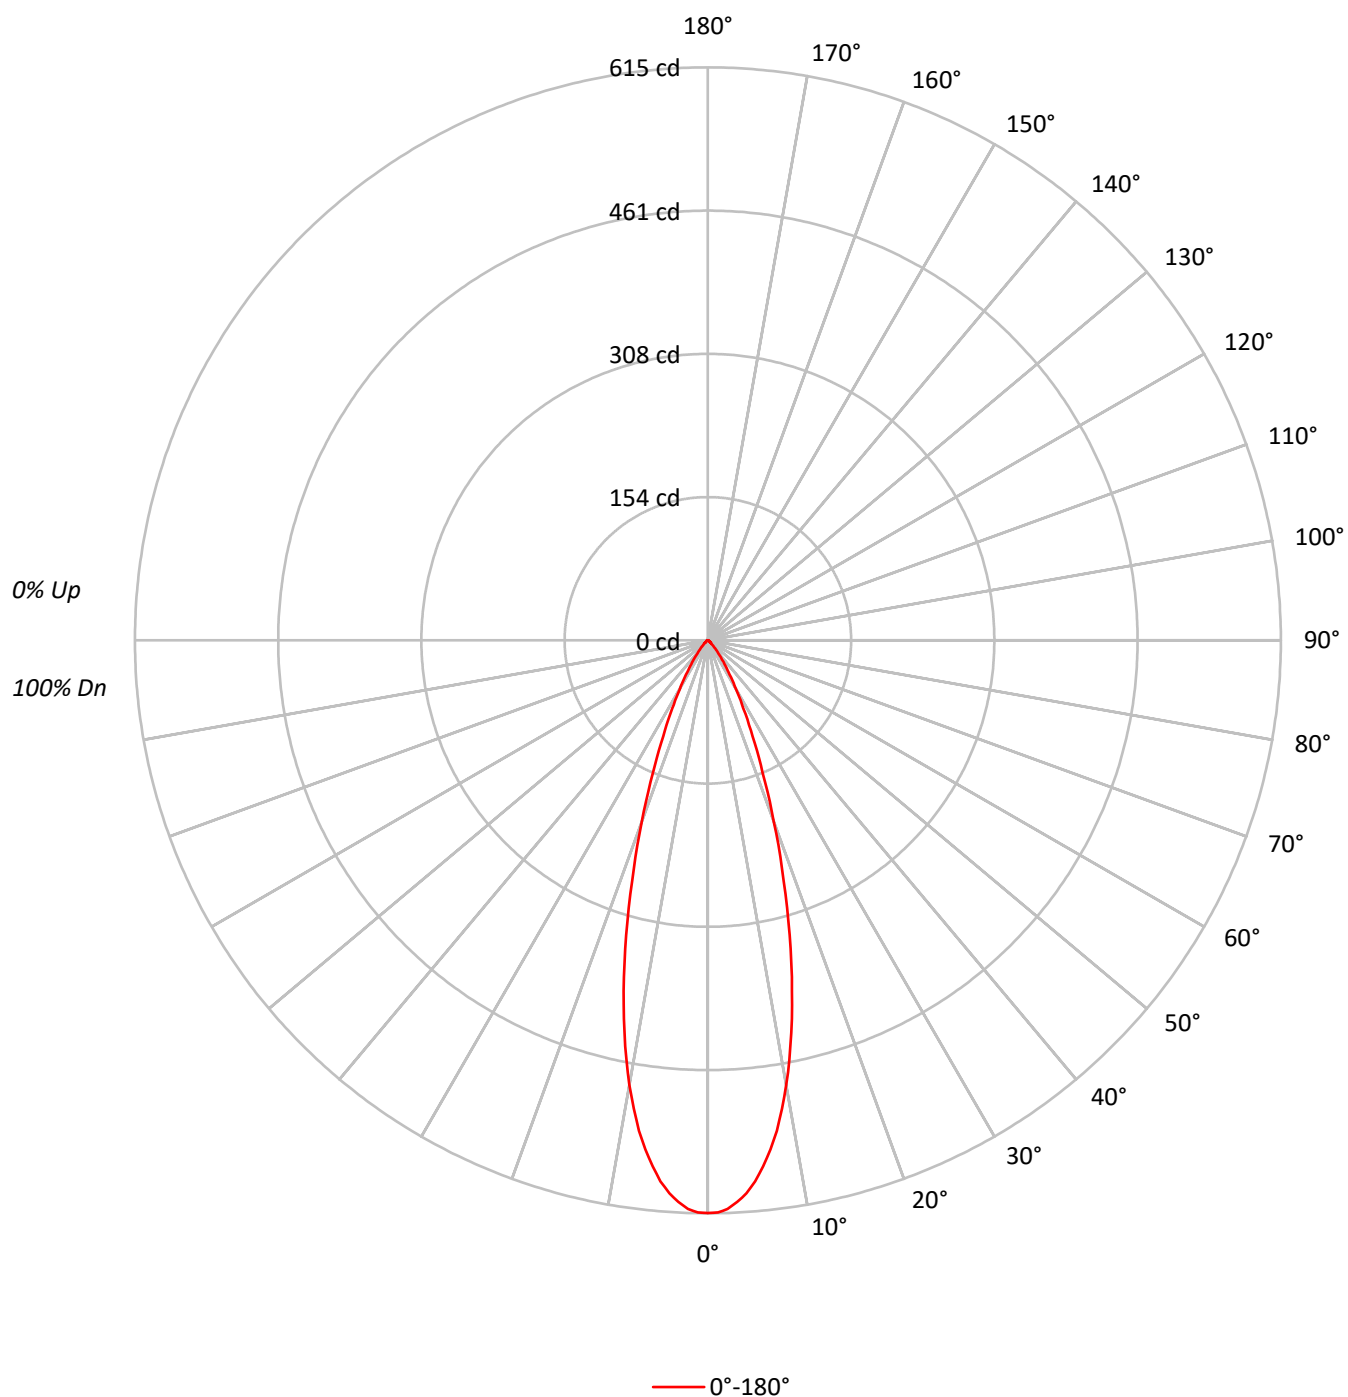

TEST NUMBER: P1263861

CATALOG NUMBER: P3AS02R309730DE010 E3DL1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	99
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	94	93
2	110	105	102	99	107	104	101	98	101	98	96	98	96	94	95	93	92	90	89	87
3	105	100	96	92	103	98	95	91	96	93	90	94	91	89	91	89	87	86	85	83
4	101	95	90	87	99	94	89	86	92	88	85	90	87	84	88	85	83	82	81	79
5	97	90	85	82	96	89	85	81	88	84	81	86	83	80	85	82	79	78	77	75
6	94	86	81	78	92	85	81	77	84	80	77	83	79	76	81	78	76	75	74	71
7	90	82	77	74	89	82	77	74	81	76	73	80	76	73	79	75	73	71	70	69
8	87	79	74	71	86	79	74	71	78	73	70	77	73	70	76	72	70	69	68	66
9	84	76	71	68	83	75	71	68	75	70	67	74	70	67	73	70	67	66	65	63
10	81	73	68	65	80	73	68	65	72	68	65	71	67	65	71	67	65	63	62	60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	134792
5°	128307
10°	107925
15°	77821
20°	48281
25°	27461
30°	15243
35°	8298
40°	4380
45°	2357
50°	1262
55°	841
60°	746
65°	778
70°	705
75°	593
80°	505
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2357 cd/sqm

TEST NUMBER: P1263861

CATALOG NUMBER: P3AS02R309730DE010 E3DL1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	52.5	22.7
10°-20°	93.3	40.4
20°-30°	53.9	23.3
30°-40°	20.5	8.9
40°-50°	6.3	2.7
50°-60°	2.1	0.9
60°-70°	1.4	0.6
70°-80°	0.8	0.3
80°-90°	0.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	199.7	86.5
0°-40°	220.2	95.3
0°-60°	228.6	98.9
0°-90°	231.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	231.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	615	
5°	583	52
15°	343	93
25°	114	54
35°	31	20
45°	8	6
55°	2	2
65°	2	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1263861

CATALOG NUMBER: P3AS02R309730DE010 E3DL1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	614.7
1°	614.3
2°	610.6
3°	603.6
4°	594.9
5°	582.9
6°	567.6
7°	550.6
8°	531.6
9°	508.9
10°	484.7
11°	458.5
12°	430.8
13°	401.7
14°	372.3
15°	342.8
17.5°	270.4
20°	206.9
22.5°	153.4
25°	113.5
27.5°	82.5
30°	60.2
32.5°	43.4
35°	31.0
37.5°	21.6
40°	15.3
42.5°	10.7
45°	7.6
47.5°	5.2
50°	3.7
52.5°	2.6
55°	2.2
57.5°	2.0
60°	1.7
62.5°	1.5
65°	1.5
67.5°	1.3
70°	1.1
72.5°	0.9
75°	0.7
77.5°	0.7
80°	0.4
82.5°	0.4
85°	0.2
87.5°	0.0



TEST NUMBER: P1263861
CATALOG NUMBER: P3AS02R309730DE010 E3DL1H

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)