

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1263889

Luminaire Tested: P3AS02R359730DE010 E3DL1H

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1263889
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-19)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R359730DE010 E3DL1H
Description: 3in Adjustable LED luminaire with, R35 optic, 3000K CCT AND, 97CRI , E3DL1H TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 230.0 lumens
Efficiency: N/A
Efficacy: 63.9 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.58
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1263889
CATALOG NUMBER: P3AS02R359730DE010 E3DL1H

Luminous Intensity Polar Plot

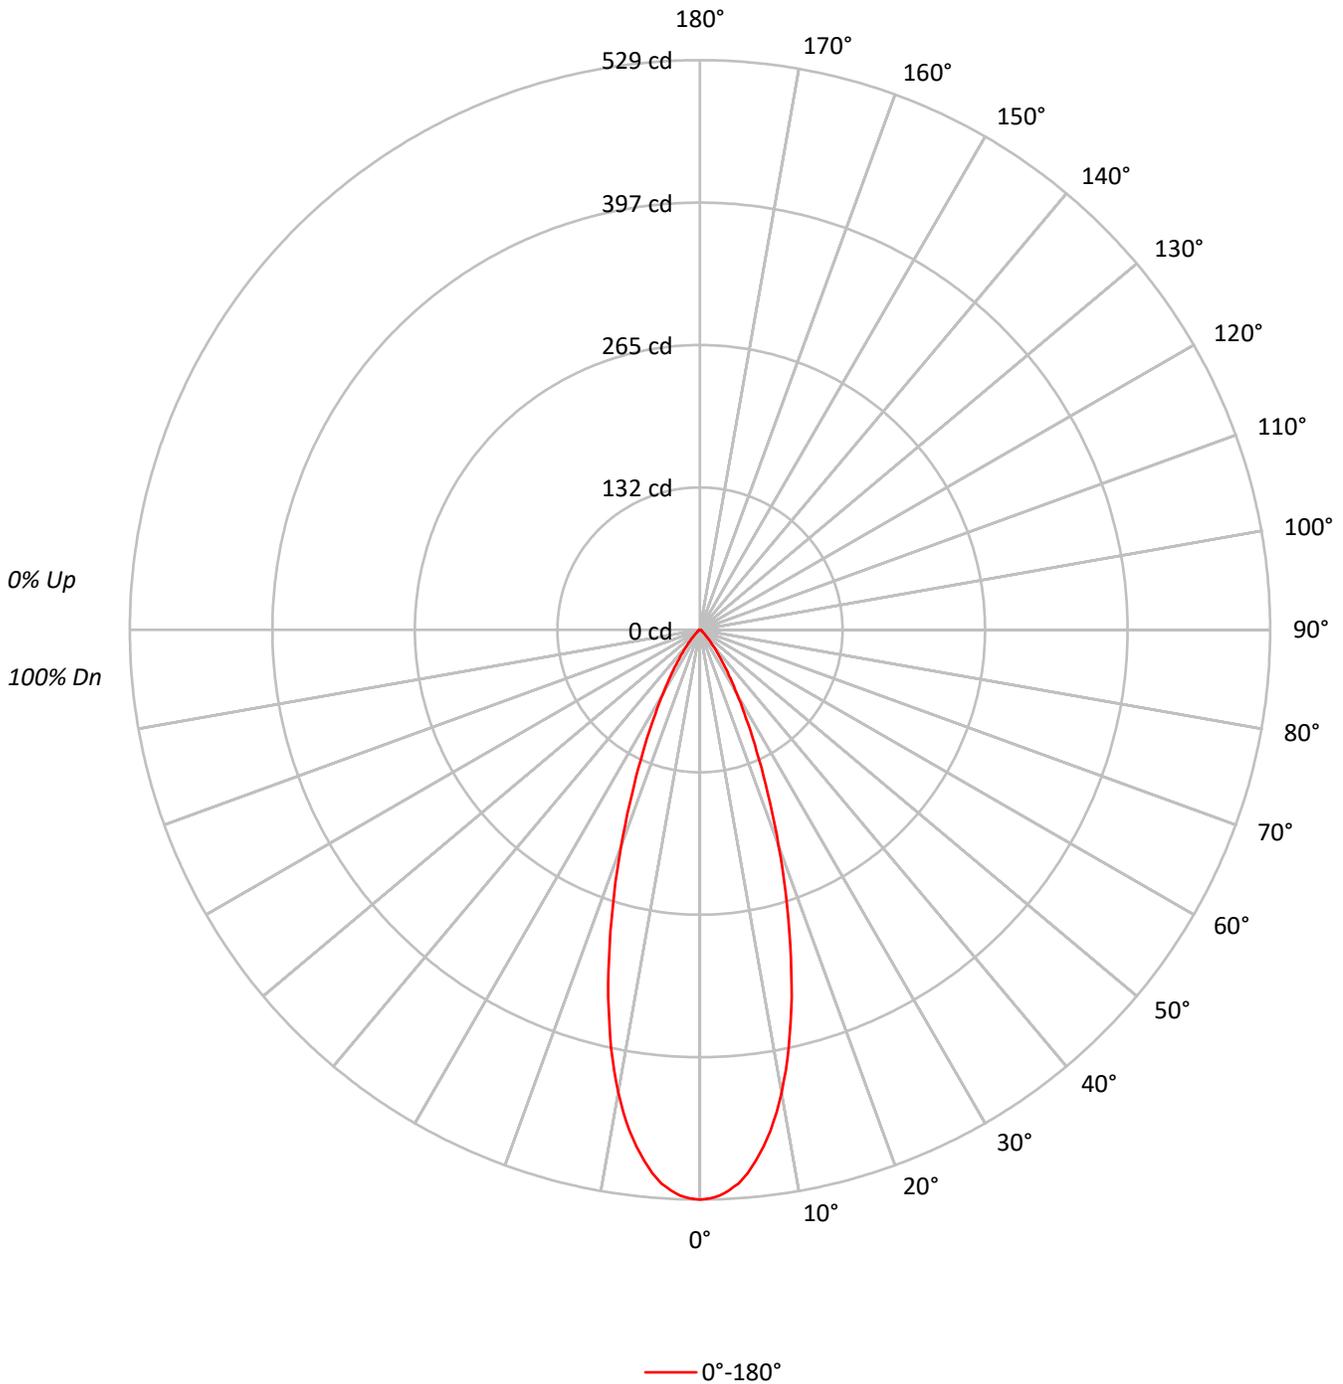



TEST NUMBER: P1263889
 CATALOG NUMBER: P3AS02R359730DE010 E3DL1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	109	107	112	109	107	106	105	104	102	102	100	99	98	97	96	95	95	95	95
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	93	91	90	90	90	90
3	105	99	95	91	103	98	94	90	95	92	89	93	90	88	91	88	86	85	85	85	85
4	100	94	89	85	99	93	88	85	91	87	84	89	85	83	87	84	82	80	80	80	80
5	96	89	84	80	95	88	83	80	86	82	79	85	81	78	83	80	78	76	76	76	76
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73	73	73	73
7	89	81	76	72	88	80	75	72	79	75	71	78	74	71	77	73	71	70	70	70	70
8	85	77	72	69	84	77	72	69	76	71	68	75	71	68	74	70	68	67	67	67	67
9	82	74	69	66	81	74	69	65	73	68	65	72	68	65	71	68	65	64	64	64	64
10	79	71	66	63	78	71	66	63	70	66	63	69	65	62	69	65	62	61	61	61	61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	115999
5°	111490
10°	97126
15°	74393
20°	49774
25°	30123
30°	17294
35°	9664
40°	5124
45°	2636
50°	1262
55°	994
60°	965
65°	778
70°	833
75°	763
80°	884
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2636 cd/sqm



TEST NUMBER: P1263889
 CATALOG NUMBER: P3AS02R359730DE010 E3DL1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	46.1	20.0
10°-20°	89.3	38.8
20°-30°	58.5	25.4
30°-40°	23.7	10.3
40°-50°	7.1	3.1
50°-60°	2.4	1.0
60°-70°	1.6	0.7
70°-80°	1.0	0.4
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	193.9	84.3
0°-40°	217.6	94.6
0°-60°	227.1	98.7
0°-90°	230.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	230.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	529	
5°	506	46
15°	328	89
25°	124	58
35°	36	24
45°	8	7
55°	3	2
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1263889
CATALOG NUMBER: P3AS02R359730DE010 E3DL1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	529.0
1°	528.1
2°	525.7
3°	520.9
4°	515.2
5°	506.5
6°	495.5
7°	483.3
8°	469.5
9°	453.8
10°	436.2
11°	416.8
12°	396.4
13°	373.7
14°	352.0
15°	327.7
17.5°	268.9
20°	213.3
22.5°	164.1
25°	124.5
27.5°	92.8
30°	68.3
32.5°	50.1
35°	36.1
37.5°	25.6
40°	17.9
42.5°	12.5
45°	8.5
47.5°	5.7
50°	3.7
52.5°	2.8
55°	2.6
57.5°	2.4
60°	2.2
62.5°	2.0
65°	1.5
67.5°	1.3
70°	1.3
72.5°	1.1
75°	0.9
77.5°	0.7
80°	0.7
82.5°	0.4
85°	0.2
87.5°	0.2



TEST NUMBER: P1263889
CATALOG NUMBER: P3AS02R359730DE010 E3DL1H

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)