

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1263900

Luminaire Tested: P3AS02R359730DE010 E3DLP1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1263900
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-17)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R359730DE010 E3DLP1GPH
Description: 3in Adjustable LED luminaire with, R35 optic, 3000K CCT AND, 97CRI , E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 68.9 lumens
Efficiency: N/A
Efficacy: 19.1 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.72
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1263900

CATALOG NUMBER: P3AS02R359730DE010 E3DLP1GPH

Luminous Intensity Polar Plot

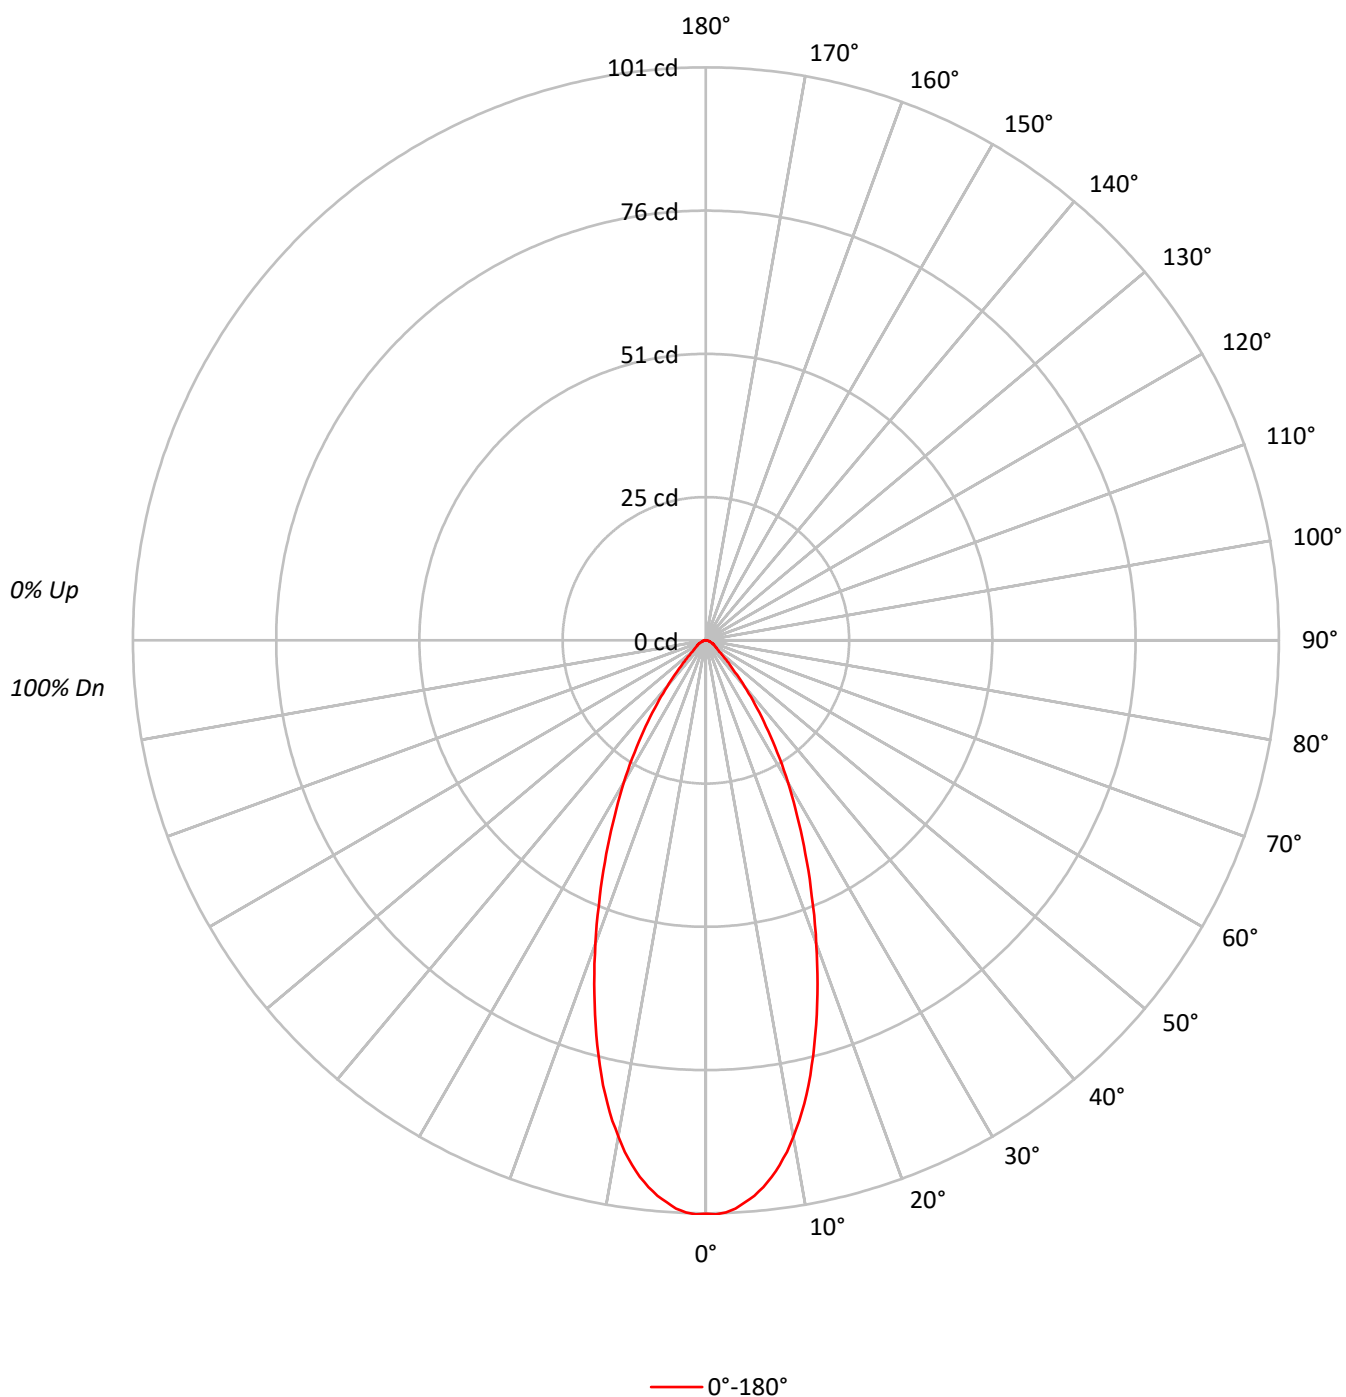

TEST NUMBER: P1263900

CATALOG NUMBER: P3AS02R359730DE010 E3DLP1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	94	105	101	97	93	97	94	91		94	92	89		91
3	102	95	90	86	100	94	89	85	91	87	84		89	85	83		86
4	97	89	83	79	95	88	82	78	86	81	77		84	80	77		82
5	92	83	77	73	90	82	77	73	81	76	72		79	75	71		77
6	87	78	72	68	86	78	72	68	76	71	67		75	70	67		73
7	83	74	68	64	82	73	67	63	72	67	63		71	66	63		70
8	79	70	64	60	78	69	63	60	68	63	59		67	62	59		66
9	76	66	60	56	75	66	60	56	65	60	56		64	59	56		63
10	72	63	57	53	71	62	57	53	62	56	53		61	56	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	22169
5°	21638
10°	19773
15°	16776
20°	13278
25°	10041
30°	7318
35°	4952
40°	3034
45°	1737
50°	1058
55°	841
60°	746
65°	675
70°	513
75°	508
80°	505
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1737 cd/sqm

TEST NUMBER: P1263900

CATALOG NUMBER: P3AS02R359730DE010 E3DLP1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	9.1	13.2
10°-20°	20.4	29.6
20°-30°	19.1	27.7
30°-40°	11.7	16.9
40°-50°	4.6	6.6
50°-60°	2.0	2.9
60°-70°	1.3	1.8
70°-80°	0.6	0.9
80°-90°	0.2	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	48.5	70.4
0°-40°	60.2	87.4
0°-60°	66.8	96.9
0°-90°	68.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	68.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	101	
5°	98	9
15°	74	20
25°	42	19
35°	18	12
45°	6	5
55°	2	2
65°	1	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1263900

CATALOG NUMBER: P3AS02R359730DE010 E3DLP1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	101.1
1°	101.2
2°	100.9
3°	100.3
4°	99.3
5°	98.3
6°	96.9
7°	95.3
8°	93.4
9°	91.3
10°	88.8
11°	86.3
12°	83.5
13°	80.5
14°	77.2
15°	73.9
17.5°	65.4
20°	56.9
22.5°	48.8
25°	41.5
27.5°	34.8
30°	28.9
32.5°	23.4
35°	18.5
37.5°	14.1
40°	10.6
42.5°	7.6
45°	5.6
47.5°	4.0
50°	3.1
52.5°	2.5
55°	2.2
57.5°	1.9
60°	1.7
62.5°	1.5
65°	1.3
67.5°	1.1
70°	0.8
72.5°	0.7
75°	0.6
77.5°	0.5
80°	0.4
82.5°	0.3
85°	0.2
87.5°	0.1



TEST NUMBER: P1263900
CATALOG NUMBER: P3AS02R359730DE010 E3DLP1GPH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)