

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1264031

Luminaire Tested: P3AS02R609730DE010 E3D1WMH

Issue Date: 1/29/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1264031  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-15)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS02R609730DE010 E3D1WMH  
Description: 3in Adjustable LED luminaire with, R60 optic, 3000K CCT AND, 97CRI , E3D1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 262.0 lumens  
Efficiency: N/A  
Efficacy: 72.8 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.88  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 3.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1264031

CATALOG NUMBER: P3AS02R609730DE010 E3D1WMH

### Luminous Intensity Polar Plot

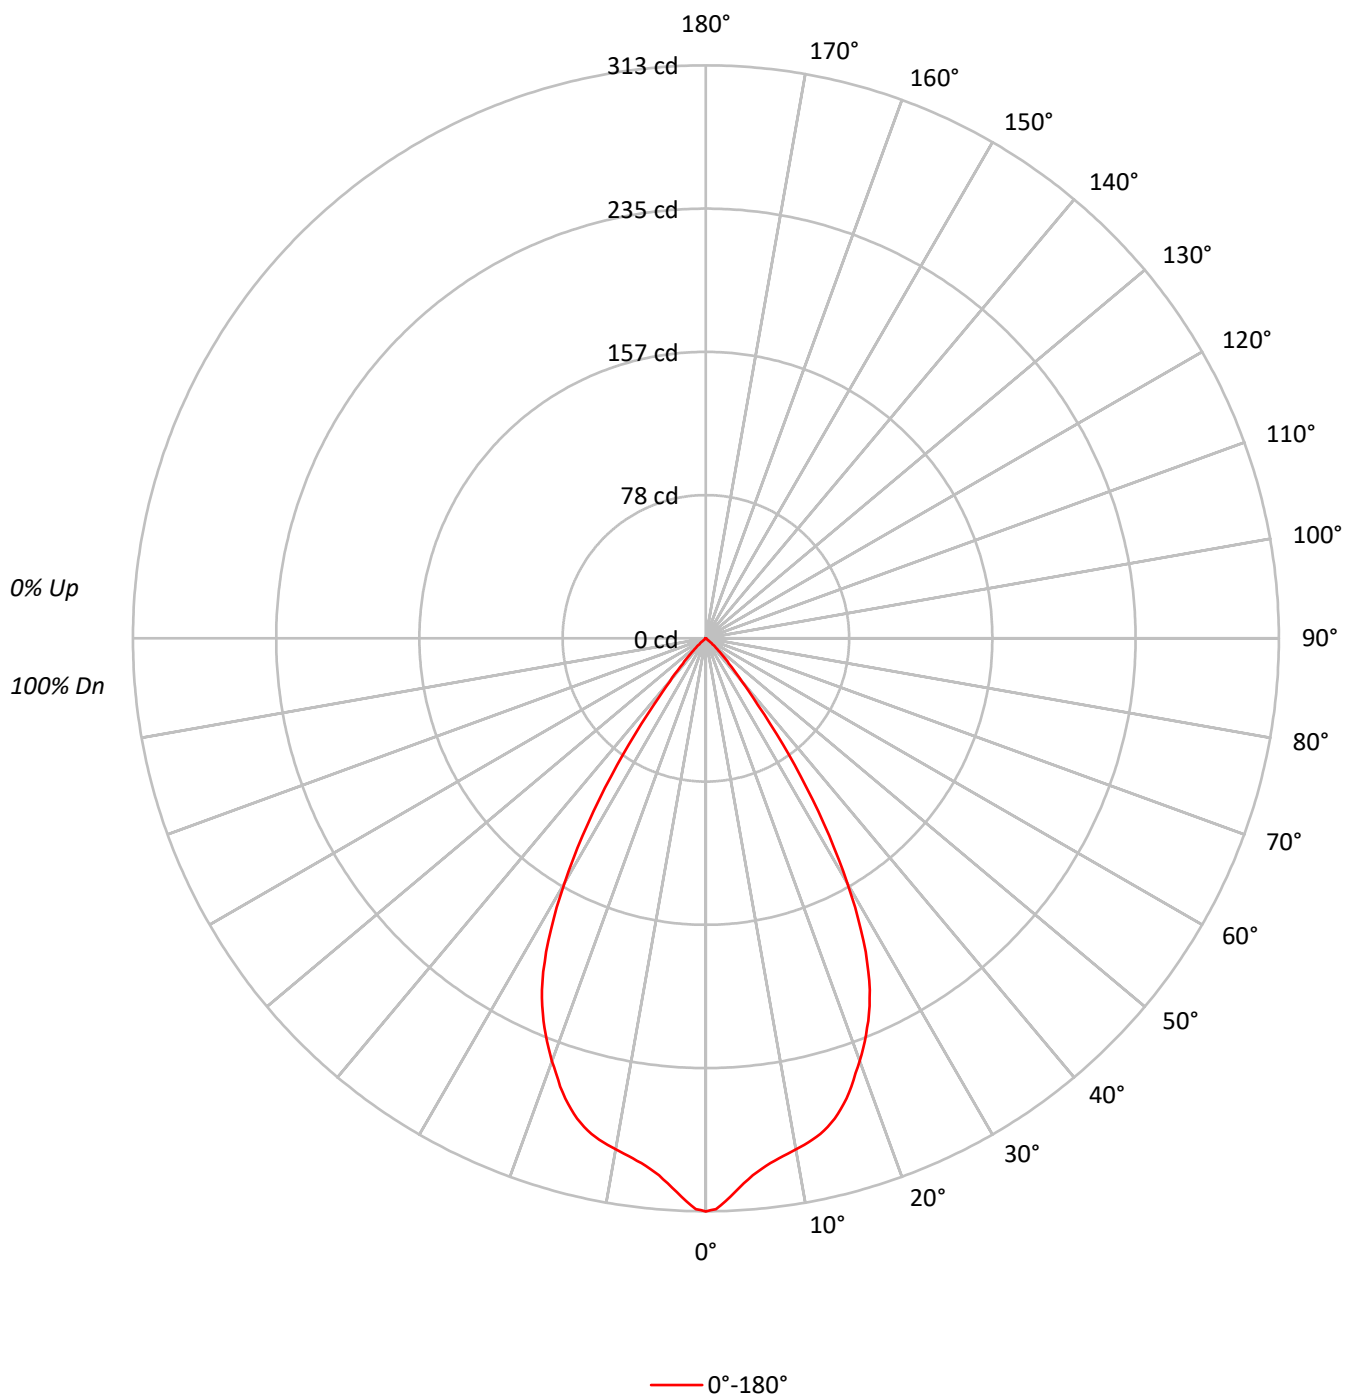

TEST NUMBER: P1264031

CATALOG NUMBER: P3AS02R609730DE010 E3D1WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |  |     |     |     |     |  |     |     |     |  |     |     |     |  |     |     |     |
|-----|-----|-----|-----|-----|--|-----|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|
| RF  | 20  |     |     |     |  | 20  |     |     |     |  | 20  |     |     |  |     | 20  |     |  |     |     | 20  |
| RC  | 80  |     |     |     |  | 70  |     |     |     |  | 30  |     |     |  |     | 10  |     |  |     |     | 0   |
| RW  | 70  | 50  | 30  | 10  |  | 70  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  |
| RCR |     |     |     |     |  |     |     |     |     |  |     |     |     |  |     |     |     |  |     |     |     |
| 0   | 119 | 119 | 119 | 119 |  | 116 | 116 | 116 | 116 |  | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 | 102 | 102 |
| 1   | 114 | 111 | 109 | 106 |  | 111 | 109 | 107 | 105 |  | 105 | 103 | 102 |  | 101 | 100 | 99  |  | 98  | 97  | 96  |
| 2   | 108 | 104 | 100 | 96  |  | 106 | 102 | 98  | 95  |  | 99  | 96  | 93  |  | 96  | 93  | 91  |  | 93  | 91  | 89  |
| 3   | 103 | 97  | 92  | 88  |  | 101 | 96  | 91  | 88  |  | 93  | 89  | 86  |  | 91  | 87  | 85  |  | 88  | 86  | 84  |
| 4   | 98  | 91  | 85  | 81  |  | 96  | 90  | 85  | 81  |  | 88  | 83  | 80  |  | 86  | 82  | 79  |  | 84  | 81  | 78  |
| 5   | 93  | 85  | 80  | 75  |  | 92  | 84  | 79  | 75  |  | 83  | 78  | 74  |  | 81  | 77  | 74  |  | 79  | 76  | 73  |
| 6   | 89  | 80  | 74  | 70  |  | 87  | 79  | 74  | 70  |  | 78  | 73  | 70  |  | 77  | 72  | 69  |  | 75  | 72  | 69  |
| 7   | 85  | 76  | 70  | 66  |  | 83  | 75  | 69  | 65  |  | 74  | 69  | 65  |  | 72  | 68  | 65  |  | 71  | 67  | 64  |
| 8   | 81  | 71  | 65  | 61  |  | 79  | 71  | 65  | 61  |  | 70  | 65  | 61  |  | 69  | 64  | 61  |  | 68  | 64  | 61  |
| 9   | 77  | 67  | 62  | 58  |  | 76  | 67  | 61  | 58  |  | 66  | 61  | 57  |  | 65  | 61  | 57  |  | 64  | 60  | 57  |
| 10  | 73  | 64  | 58  | 54  |  | 72  | 63  | 58  | 54  |  | 63  | 58  | 54  |  | 62  | 57  | 54  |  | 61  | 57  | 54  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |       |
|-----|-------|
|     | 0°    |
| 0°  | 68657 |
| 5°  | 64803 |
| 10° | 63125 |
| 15° | 61680 |
| 20° | 57358 |
| 25° | 51269 |
| 30° | 39171 |
| 35° | 22620 |
| 40° | 8788  |
| 45° | 3659  |
| 50° | 819   |
| 55° | 115   |
| 60° | 88    |
| 65° | 52    |
| 70° | 64    |
| 75° | 0     |
| 80° | 0     |
| 85° | 0     |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3659 cd/sqm

TEST NUMBER: P1264031

CATALOG NUMBER: P3AS02R609730DE010 E3D1WMH

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 27.8   | 10.6      |
| 10°-20°   | 75.7   | 28.9      |
| 20°-30°   | 94.8   | 36.2      |
| 30°-40°   | 53.0   | 20.2      |
| 40°-50°   | 10.1   | 3.8       |
| 50°-60°   | 0.5    | 0.2       |
| 60°-70°   | 0.1    | 0.0       |
| 70°-80°   | 0.0    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 198.3  | 75.7      |
| 0°-40°    | 251.3  | 95.9      |
| 0°-60°    | 261.8  | 99.9      |
| 0°-90°    | 262.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 262.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 313 |      |
| 5°  | 294 | 28   |
| 15° | 272 | 76   |
| 25° | 212 | 95   |
| 35° | 84  | 53   |
| 45° | 12  | 10   |
| 55° | 0   | 1    |
| 65° | 0   | 0    |
| 75° | 0   | 0    |
| 85° | 0   | 0    |
| 90° | 0   |      |

TEST NUMBER: P1264031

CATALOG NUMBER: P3AS02R609730DE010 E3D1WMH

**CANDELA DISTRIBUTION (FULL):**

| 0°    |       |
|-------|-------|
| 0°    | 313.1 |
| 1°    | 311.8 |
| 2°    | 307.7 |
| 3°    | 302.9 |
| 4°    | 298.4 |
| 5°    | 294.4 |
| 6°    | 291.4 |
| 7°    | 288.8 |
| 8°    | 286.9 |
| 9°    | 285.1 |
| 10°   | 283.5 |
| 11°   | 281.9 |
| 12°   | 280.0 |
| 13°   | 277.8 |
| 14°   | 275.1 |
| 15°   | 271.7 |
| 16°   | 267.5 |
| 17°   | 262.8 |
| 18°   | 257.4 |
| 19°   | 251.3 |
| 20°   | 245.8 |
| 21°   | 239.8 |
| 22°   | 233.5 |
| 23°   | 227.0 |
| 24°   | 219.8 |
| 25°   | 211.9 |
| 26°   | 202.6 |
| 27°   | 192.2 |
| 28°   | 180.5 |
| 29°   | 168.1 |
| 30°   | 154.7 |
| 31°   | 141.1 |
| 32°   | 127.2 |
| 32.5° | 119.6 |
| 33°   | 112.7 |
| 34°   | 98.5  |
| 35°   | 84.5  |
| 36°   | 71.8  |
| 37°   | 58.4  |
| 37.5° | 52.3  |
| 38°   | 46.3  |
| 39°   | 37.3  |
| 40°   | 30.7  |
| 42.5° | 18.6  |
| 45°   | 11.8  |



TEST NUMBER: P1264031

CATALOG NUMBER: P3AS02R609730DE010 E3D1WMH

**CANDELA DISTRIBUTION (continued):**

|       | 0°  |
|-------|-----|
| 47.5° | 6.5 |
| 50°   | 2.4 |
| 52.5° | 0.5 |
| 55°   | 0.3 |
| 57.5° | 0.2 |
| 60°   | 0.2 |
| 62.5° | 0.1 |
| 65°   | 0.1 |
| 67.5° | 0.1 |
| 70°   | 0.1 |
| 72.5° | 0.1 |
| 75°   | 0.0 |
| 77.5° | 0.0 |
| 80°   | 0.0 |
| 82.5° | 0.0 |
| 85°   | 0.0 |
| 87.5° | 0.0 |
| 90°   | 0.0 |

(END OF REPORT)