

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1264192

Luminaire Tested: P3AS05R159730DE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1264192
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-2)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R159730DE010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R15 optic, 3000K CCT AND, 97CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 353.9 lumens
Efficiency: N/A
Efficacy: 49.2 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1264192

CATALOG NUMBER: P3AS05R159730DE010 E3DLD1WMH

Luminous Intensity Polar Plot

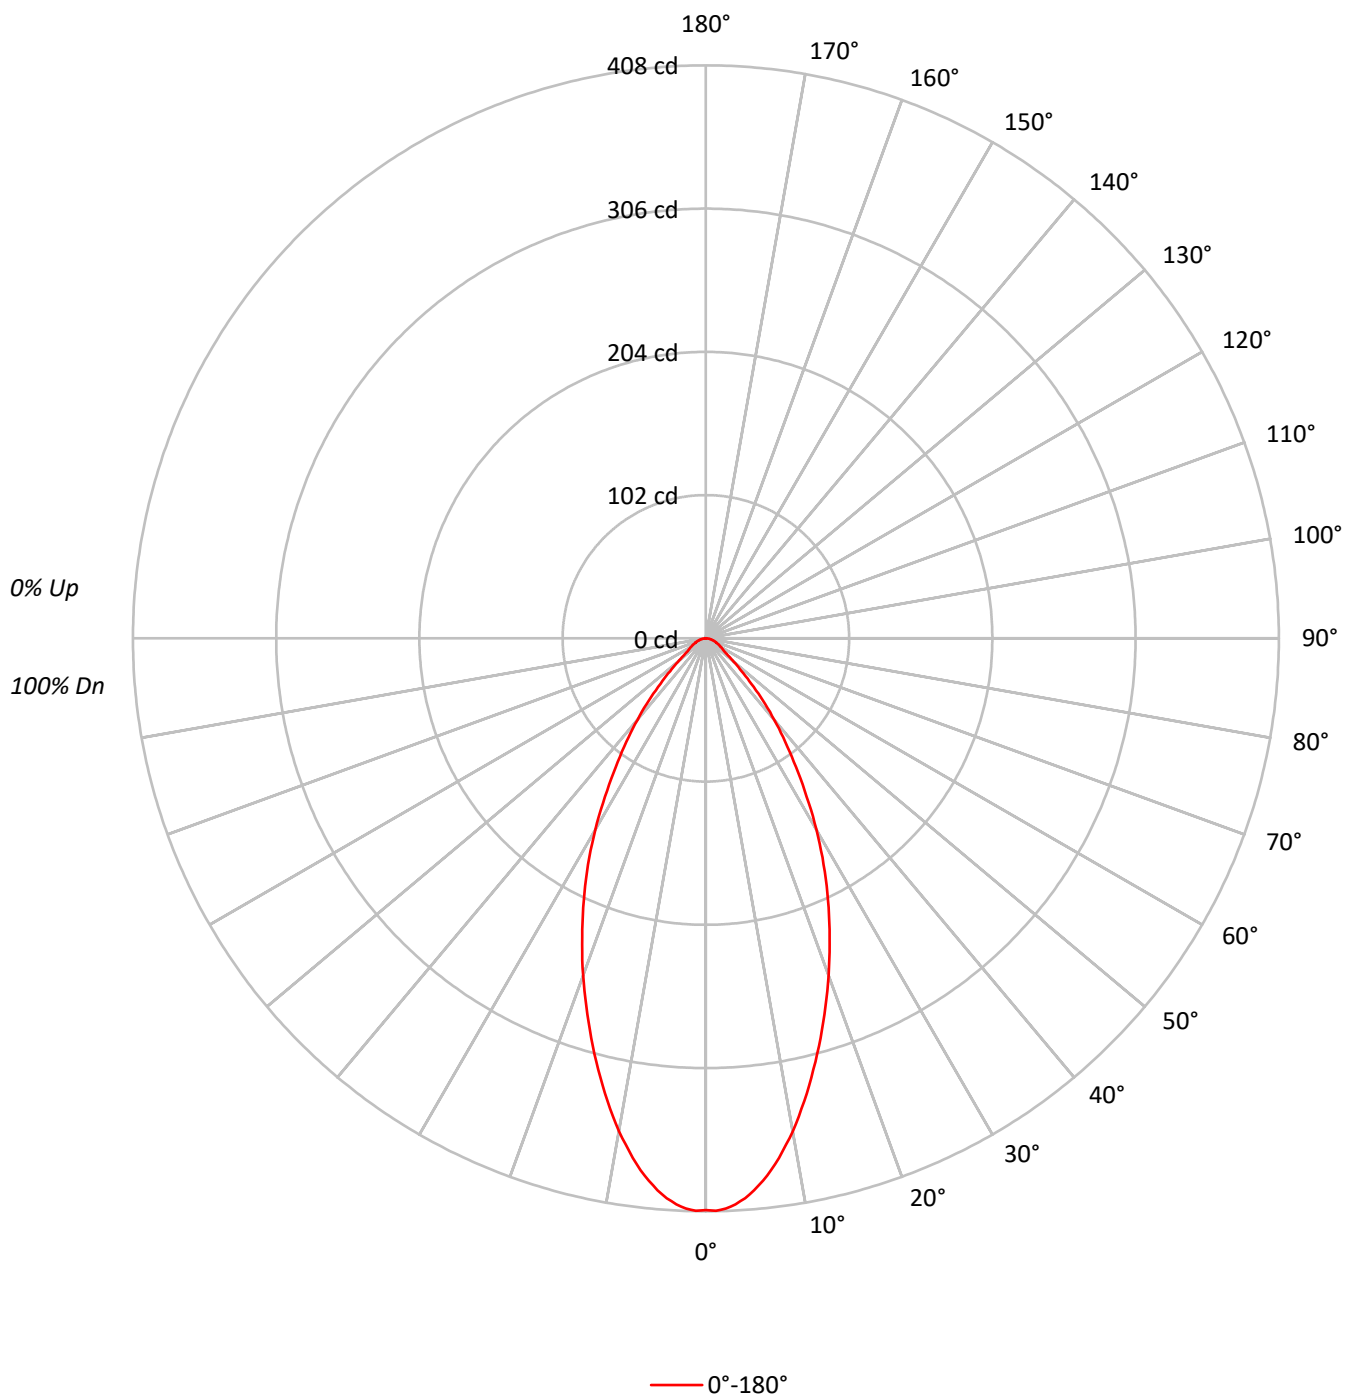

TEST NUMBER: P1264192

CATALOG NUMBER: P3AS05R159730DE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	109	107	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	95	91	95	92	89		92	90	87		90
3	100	93	87	83	98	91	86	82	89	84	81		86	82	79		84
4	94	86	80	75	92	85	79	74	82	77	73		80	76	73		78
5	89	80	73	68	87	79	73	68	77	72	67		75	71	67		74
6	84	74	68	63	83	73	67	63	72	66	62		70	66	62		69
7	80	70	63	58	78	69	63	58	67	62	58		66	61	58		65
8	76	65	59	54	74	65	58	54	63	58	54		62	57	54		61
9	72	61	55	51	71	61	55	51	60	54	50		59	54	50		58
10	68	58	52	48	67	57	51	47	57	51	47		56	51	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	89291
5°	86859
10°	79380
15°	69535
20°	59645
25°	49793
30°	39854
35°	29901
40°	21698
45°	14172
50°	8870
55°	6002
60°	5307
65°	4877
70°	4616
75°	4151
80°	3915
85°	3271

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 14172 cd/sqm

TEST NUMBER: P1264192

CATALOG NUMBER: P3AS05R159730DE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	36.4	10.3
10°-20°	85.3	24.1
20°-30°	94.0	26.6
30°-40°	70.4	19.9
40°-50°	36.5	10.3
50°-60°	15.1	4.3
60°-70°	9.4	2.7
70°-80°	5.2	1.5
80°-90°	1.5	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	215.8	61.0
0°-40°	286.2	80.9
0°-60°	337.8	95.5
0°-90°	353.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	353.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	407	
5°	395	36
15°	306	85
25°	206	94
35°	112	70
45°	46	36
55°	16	15
65°	9	9
75°	5	5
85°	1	1
90°	0	

TEST NUMBER: P1264192

CATALOG NUMBER: P3AS05R159730DE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	407.2
1°	407.7
2°	406.3
3°	403.6
4°	399.6
5°	394.6
6°	388.4
7°	381.6
8°	373.6
9°	365.0
10°	356.5
12.5°	331.9
15°	306.3
17.5°	280.7
20°	255.6
22.5°	230.1
25°	205.8
27.5°	181.6
30°	157.4
32.5°	133.6
35°	111.7
37.5°	92.8
40°	75.8
42.5°	60.1
45°	45.7
47.5°	34.5
50°	26.0
52.5°	19.3
55°	15.7
57.5°	13.9
60°	12.1
62.5°	10.8
65°	9.4
67.5°	8.1
70°	7.2
72.5°	5.8
75°	4.9
77.5°	4.0
80°	3.1
82.5°	2.2
85°	1.3
87.5°	0.4
90°	0.0

(END OF REPORT)