

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1264218

Luminaire Tested: P3AS05R209730DE010 E3DLD1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1264218
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-6)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R209730DE010 E3DLD1GPH
Description: 3in Adjustable LED luminaire with, R20 optic, 3000K CCT AND, 97CRI , E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 173.0 lumens
Efficiency: N/A
Efficacy: 24.0 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1264218

CATALOG NUMBER: P3AS05R209730DE010 E3DLD1GPH

Luminous Intensity Polar Plot

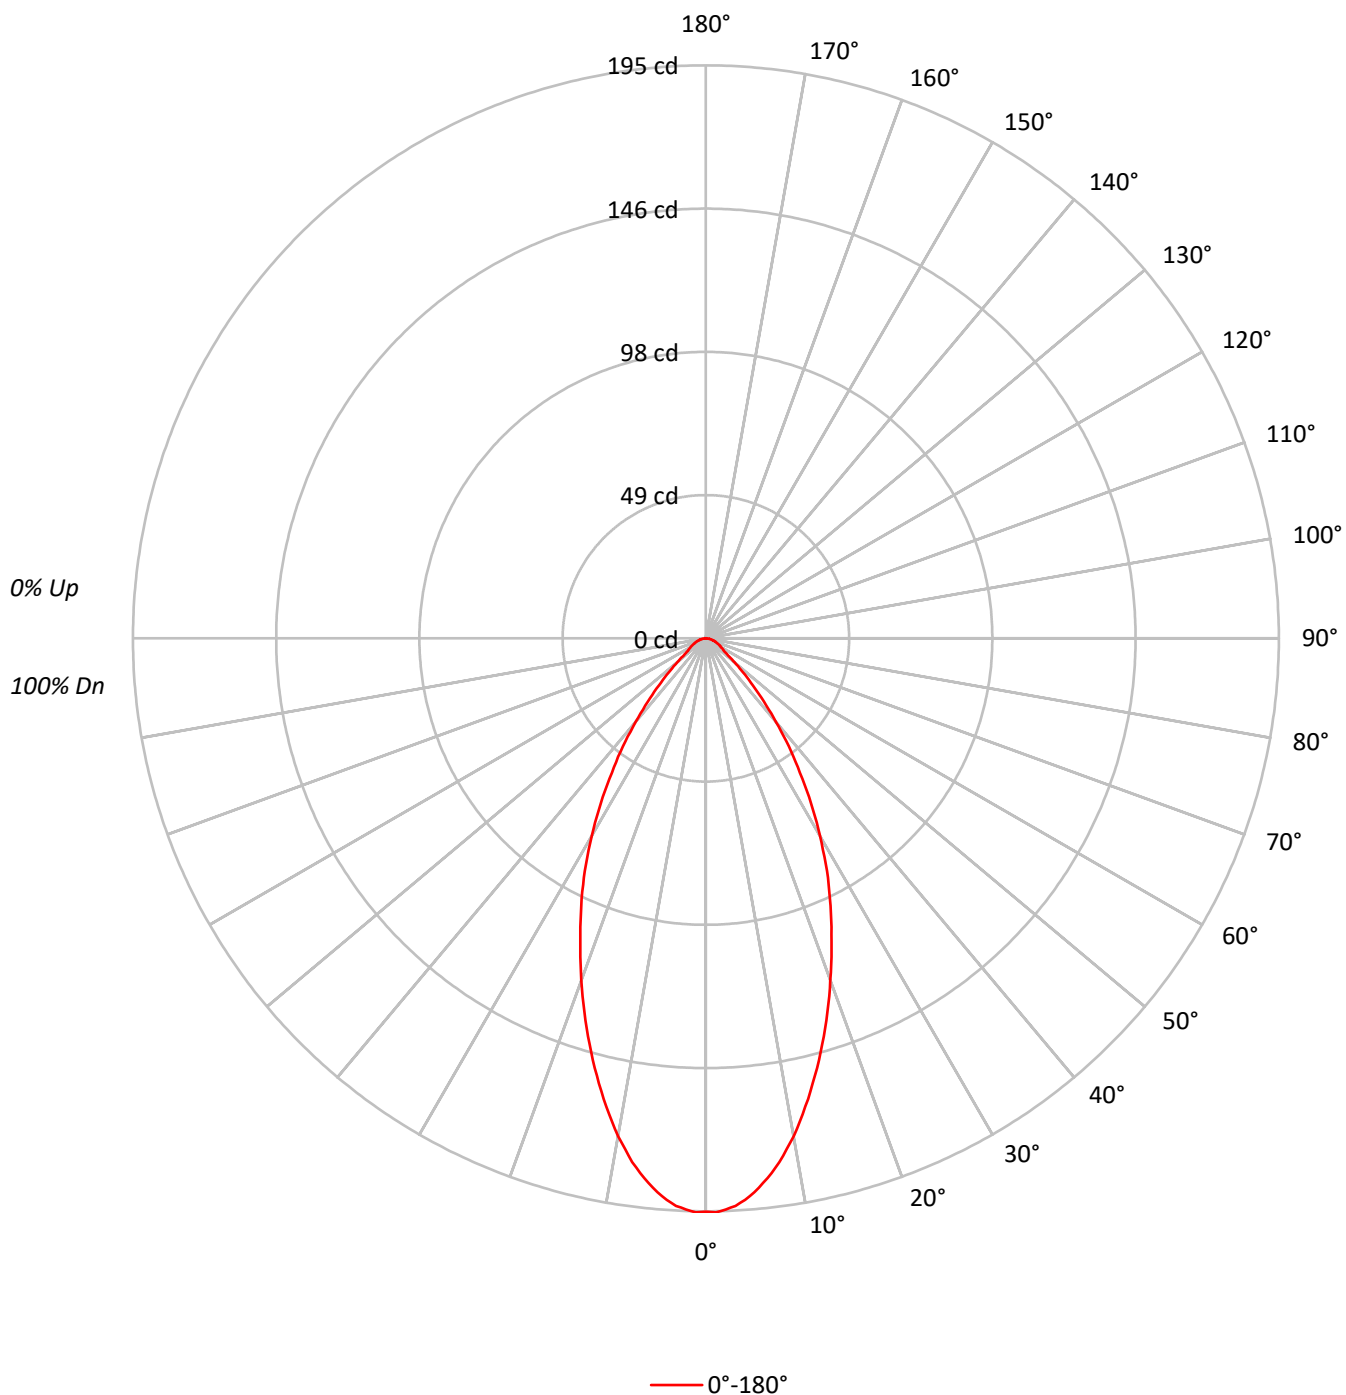

TEST NUMBER: P1264218

CATALOG NUMBER: P3AS05R209730DE010 E3DLD1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	109	106	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		90
3	100	93	87	82	98	91	86	82	88	84	80		86	82	79		84
4	94	86	79	75	92	85	79	74	82	77	73		80	76	72		78
5	89	80	73	68	87	79	73	68	77	71	67		75	70	67		73
6	84	74	68	63	82	73	67	63	72	66	62		70	65	62		69
7	80	69	63	58	78	69	62	58	67	62	58		66	61	57		65
8	75	65	59	54	74	64	58	54	63	58	54		62	57	53		61
9	72	61	55	50	70	61	55	50	60	54	50		59	54	50		58
10	68	58	51	47	67	57	51	47	56	51	47		56	51	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	42782
5°	41646
10°	38320
15°	33735
20°	28913
25°	24292
30°	19649
35°	14937
40°	10620
45°	7008
50°	4332
55°	2867
60°	2588
65°	2387
70°	2244
75°	2033
80°	1894
85°	1761

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 7008 cd/sqm

TEST NUMBER: P1264218

CATALOG NUMBER: P3AS05R209730DE010 E3DLD1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	17.5	10.1
10°-20°	41.4	23.9
20°-30°	45.9	26.5
30°-40°	35.0	20.2
40°-50°	17.9	10.4
50°-60°	7.3	4.2
60°-70°	4.6	2.7
70°-80°	2.6	1.5
80°-90°	0.7	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	104.8	60.6
0°-40°	139.8	80.8
0°-60°	165.0	95.4
0°-90°	173.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	173.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	195	
5°	189	18
15°	149	41
25°	100	46
35°	56	35
45°	23	18
55°	8	7
65°	5	5
75°	2	3
85°	1	1
90°	0	

TEST NUMBER: P1264218

CATALOG NUMBER: P3AS05R209730DE010 E3DLD1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	195.1
1°	195.4
2°	194.5
3°	193.4
4°	191.6
5°	189.2
6°	186.4
7°	183.3
8°	180.0
9°	176.0
10°	172.1
12.5°	160.6
15°	148.6
17.5°	136.3
20°	123.9
22.5°	111.6
25°	100.4
27.5°	89.2
30°	77.6
32.5°	66.6
35°	55.8
37.5°	46.4
40°	37.1
42.5°	29.2
45°	22.6
47.5°	17.1
50°	12.7
52.5°	9.4
55°	7.5
57.5°	6.8
60°	5.9
62.5°	5.3
65°	4.6
67.5°	4.0
70°	3.5
72.5°	2.9
75°	2.4
77.5°	2.0
80°	1.5
82.5°	1.1
85°	0.7
87.5°	0.2
90°	0.0

(END OF REPORT)