

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1264228

Luminaire Tested: P3AS05R259730DE010 E3CB1MB

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1264228
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R259730DE010 E3CB1MB
Description: 3in Adjustable LED luminaire with, R25 optic, 3000K CCT AND, 97CRI , E3CB1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 570.9 lumens
Efficiency: N/A
Efficacy: 79.3 lumens/watt
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.41
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1264228

CATALOG NUMBER: P3AS05R259730DE010 E3CB1MB

Luminous Intensity Polar Plot

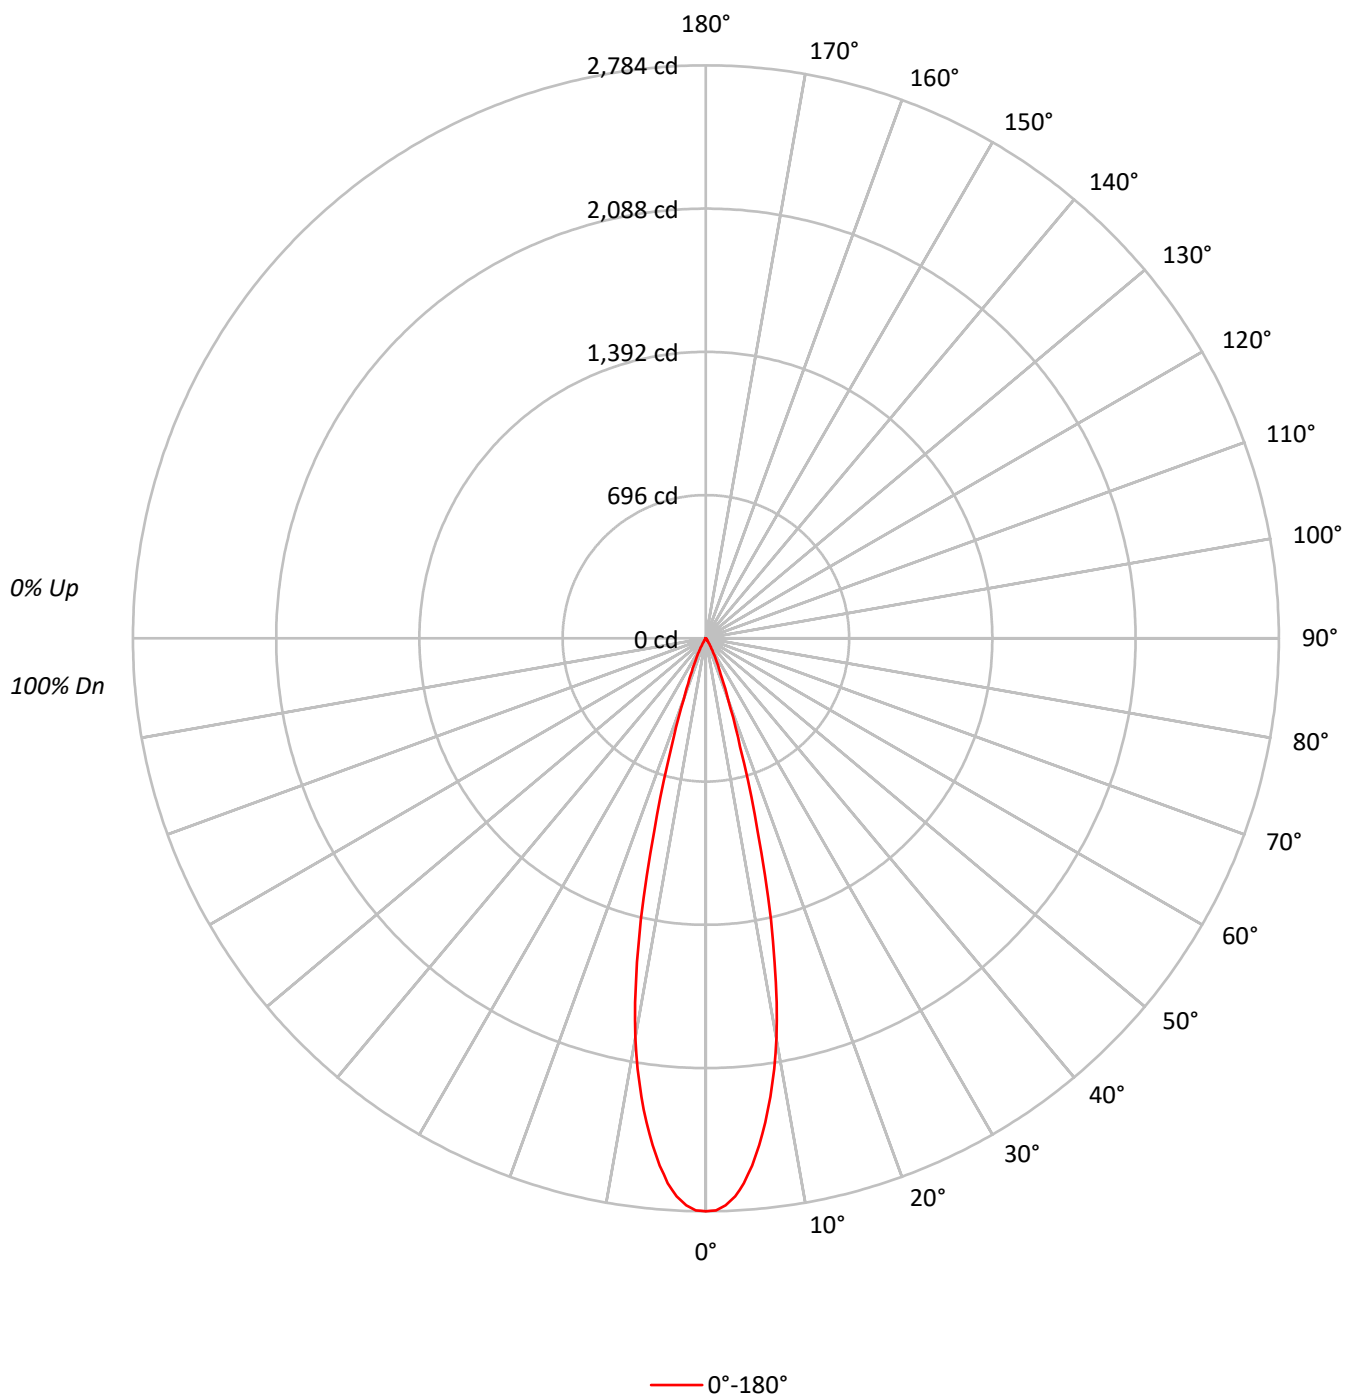

TEST NUMBER: P1264228

CATALOG NUMBER: P3AS05R259730DE010 E3CB1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	110	113	111	109	108	107	106	105		103	103	102		100
2	112	108	105	103	110	107	104	102	104	102	100		101	99	98		98
3	108	104	101	98	107	103	100	97	100	98	96		98	96	94		96
4	105	100	97	94	104	99	96	93	97	95	92		96	93	91		94
5	103	97	93	90	101	96	93	90	95	92	89		93	91	89		92
6	100	94	90	87	99	93	90	87	92	89	87		91	88	86		90
7	97	91	88	85	96	91	87	85	90	87	84		89	86	84		88
8	95	89	85	83	94	89	85	82	88	84	82		87	84	82		86
9	93	87	83	80	92	86	83	80	86	82	80		85	82	80		84
10	91	85	81	78	90	84	81	78	84	80	78		83	80	78		82

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	610477
5°	566210
10°	439115
15°	220183
20°	72340
25°	28768
30°	10786
35°	3132
40°	1403
45°	558
50°	443
55°	344
60°	395
65°	467
70°	256
75°	339
80°	505
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 558 cd/sqm

TEST NUMBER: P1264228

CATALOG NUMBER: P3AS05R259730DE010 E3CB1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	226.3	39.6
10°-20°	269.9	47.3
20°-30°	60.9	10.7
30°-40°	9.9	1.7
40°-50°	1.8	0.3
50°-60°	0.9	0.2
60°-70°	0.8	0.1
70°-80°	0.4	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	557.0	97.6
0°-40°	566.9	99.3
0°-60°	569.6	99.8
0°-90°	570.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	570.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2784	
5°	2572	226
15°	970	270
25°	119	61
35°	12	10
45°	2	2
55°	1	1
65°	1	1
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1264228

CATALOG NUMBER: P3AS05R259730DE010 E3CB1MB

CANDELA DISTRIBUTION (FULL):

0°	
0°	2784.0
1°	2779.5
2°	2757.1
3°	2715.8
4°	2653.5
5°	2572.3
6°	2475.4
7°	2370.4
8°	2250.2
9°	2118.7
10°	1972.1
11°	1802.9
12°	1608.2
13°	1404.6
14°	1186.1
15°	969.9
17.5°	552.7
20°	310.0
22.5°	187.1
25°	118.9
27.5°	73.1
30°	42.6
32.5°	22.4
35°	11.7
37.5°	7.6
40°	4.9
42.5°	3.1
45°	1.8
47.5°	1.3
50°	1.3
52.5°	1.3
55°	0.9
57.5°	0.9
60°	0.9
62.5°	0.9
65°	0.9
67.5°	0.9
70°	0.4
72.5°	0.4
75°	0.4
77.5°	0.4
80°	0.4
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1264228

CATALOG NUMBER: P3AS05R259730DE010 E3CB1MB

CANDELA DISTRIBUTION (continued):



(END OF REPORT)