

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1264297

Luminaire Tested: P3AS05R359730DE010 E3CD1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1264297
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-20)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R359730DE010 E3CD1MW
Description: 3in Adjustable LED luminaire with, R35 optic, 3000K CCT AND, 97CRI , E3CD1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 569.9 lumens
Efficiency: N/A
Efficacy: 79.2 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.52
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1264297
CATALOG NUMBER: P3AS05R359730DE010 E3CD1MW

Luminous Intensity Polar Plot

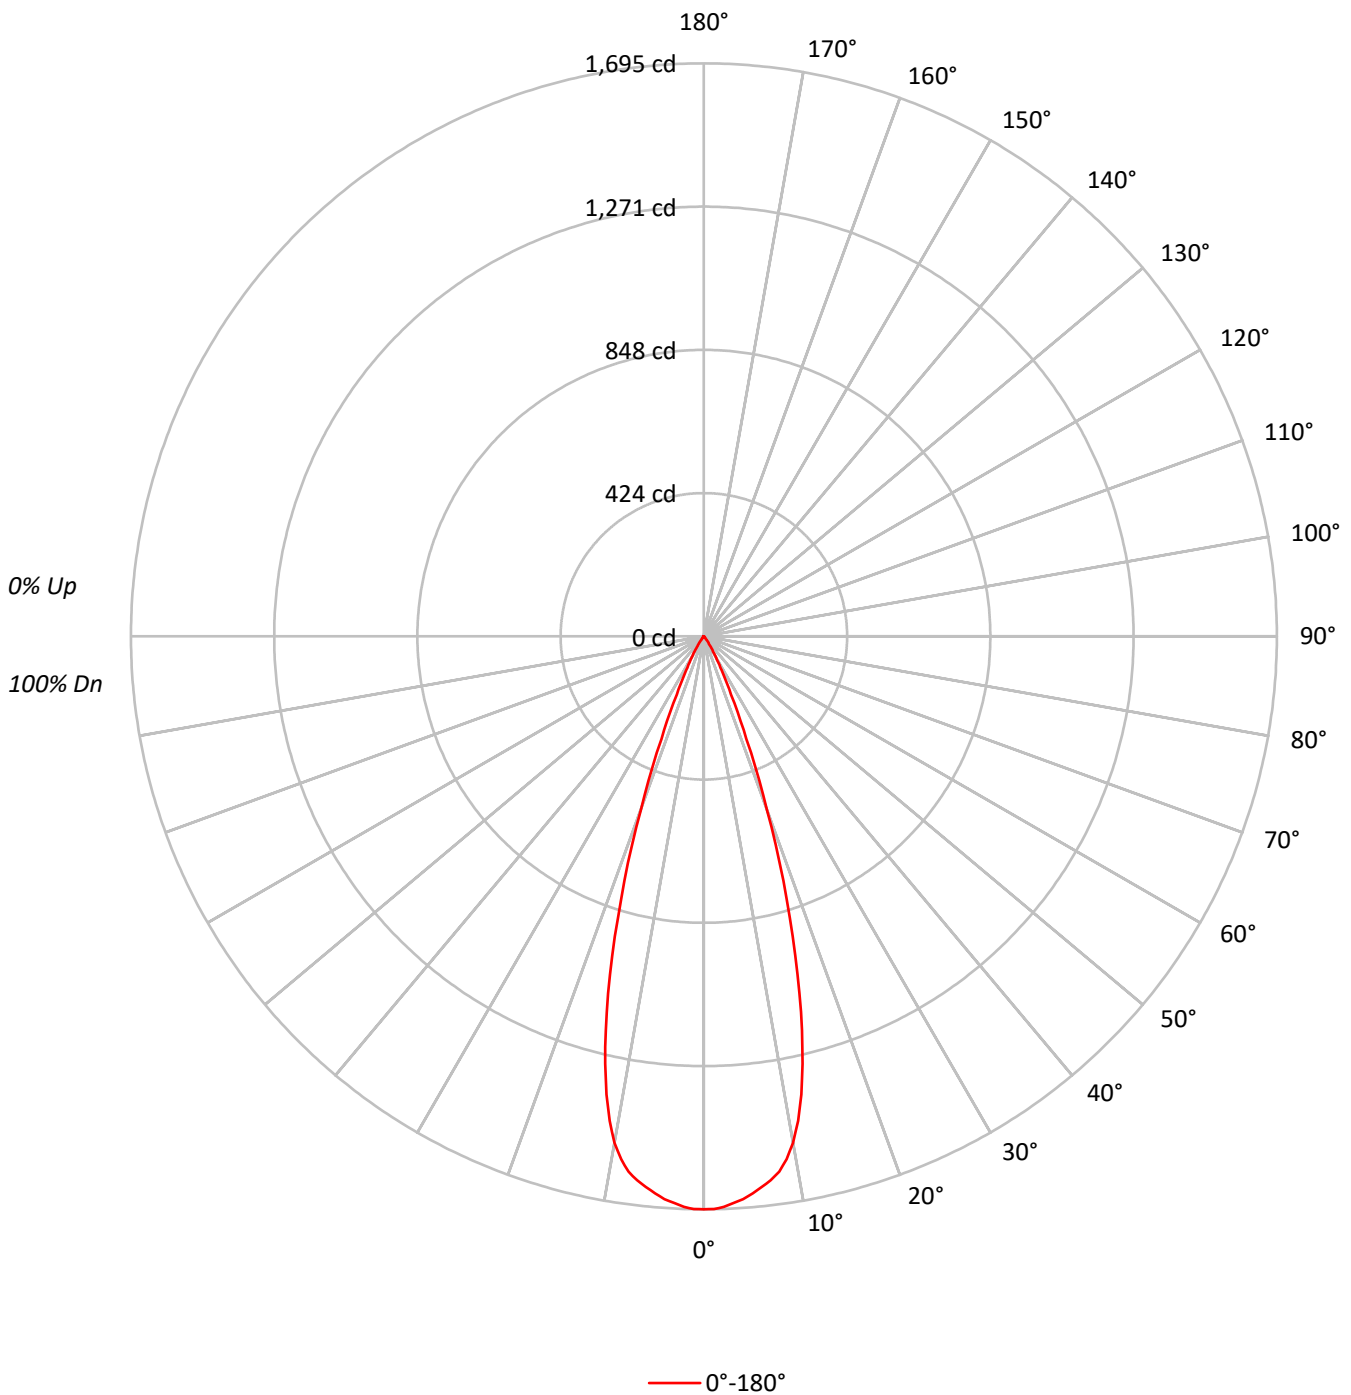



TEST NUMBER: P1264297

CATALOG NUMBER: P3AS05R359730DE010 E3CD1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	113	111	109	112	110	109	107	107	105	104	103	102	101	99	99	98	96	96	96	96
2	111	107	104	101	109	105	103	100	102	100	98	99	98	96	97	95	94	93	93	93	93
3	107	102	98	95	105	101	98	95	98	96	93	96	94	92	94	92	90	89	89	89	89
4	104	98	94	91	102	97	93	90	95	92	89	93	90	88	91	89	87	86	86	86	86
5	100	94	90	87	99	93	89	86	92	88	86	90	87	85	89	86	84	83	83	83	83
6	97	91	86	83	96	90	86	83	89	85	82	87	84	82	86	83	81	80	80	80	80
7	94	87	83	80	93	87	83	80	86	82	79	85	81	79	84	81	79	78	78	78	78
8	91	84	80	77	90	84	80	77	83	79	77	82	79	76	81	78	76	75	75	75	75
9	89	82	77	74	88	81	77	74	80	77	74	80	76	74	79	76	74	73	73	73	73
10	86	79	75	72	85	79	75	72	78	74	72	77	74	72	77	74	71	70	70	70	70

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	371681
5°	364098
10°	338738
15°	248333
20°	127154
25°	45825
30°	17851
35°	6237
40°	2576
45°	682
50°	614
55°	688
60°	570
65°	467
70°	577
75°	763
80°	505
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 75°

Luminance: 763 cd/sqm



TEST NUMBER: P1264297
 CATALOG NUMBER: P3AS05R359730DE010 E3CD1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	154.2	27.1
10°-20°	289.3	50.8
20°-30°	102.4	18.0
30°-40°	17.9	3.1
40°-50°	2.6	0.5
50°-60°	1.4	0.3
60°-70°	1.0	0.2
70°-80°	0.8	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	546.0	95.8
0°-40°	563.9	98.9
0°-60°	568.0	99.7
0°-90°	569.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	569.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1695	
5°	1654	154
15°	1094	289
25°	189	102
35°	23	18
45°	2	3
55°	2	1
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1264297
CATALOG NUMBER: P3AS05R359730DE010 E3CD1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	1695.0
1°	1694.5
2°	1689.2
3°	1678.8
4°	1669.4
5°	1654.1
6°	1638.4
7°	1620.9
8°	1599.4
9°	1565.7
10°	1521.3
11°	1459.8
12°	1385.7
13°	1297.7
14°	1200.8
15°	1093.9
17.5°	814.7
20°	544.9
22.5°	328.6
25°	189.4
27.5°	113.1
30°	70.5
32.5°	40.8
35°	23.3
37.5°	14.8
40°	9.0
42.5°	4.5
45°	2.2
47.5°	1.8
50°	1.8
52.5°	1.8
55°	1.8
57.5°	1.3
60°	1.3
62.5°	1.3
65°	0.9
67.5°	0.9
70°	0.9
72.5°	0.9
75°	0.9
77.5°	0.4
80°	0.4
82.5°	0.4
85°	0.0
87.5°	0.0



TEST NUMBER: P1264297
CATALOG NUMBER: P3AS05R359730DE010 E3CD1MW

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)