

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1264312

Luminaire Tested: P3AS05R359730DE010 E3DLP1H

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1264312
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-17)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R359730DE010 E3DLP1H
Description: 3in Adjustable LED luminaire with, R35 optic, 3000K CCT AND, 97CRI , E3DLP1H TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 291.0 lumens
Efficiency: N/A
Efficacy: 40.4 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.72
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1264312

CATALOG NUMBER: P3AS05R359730DE010 E3DLP1H

Luminous Intensity Polar Plot

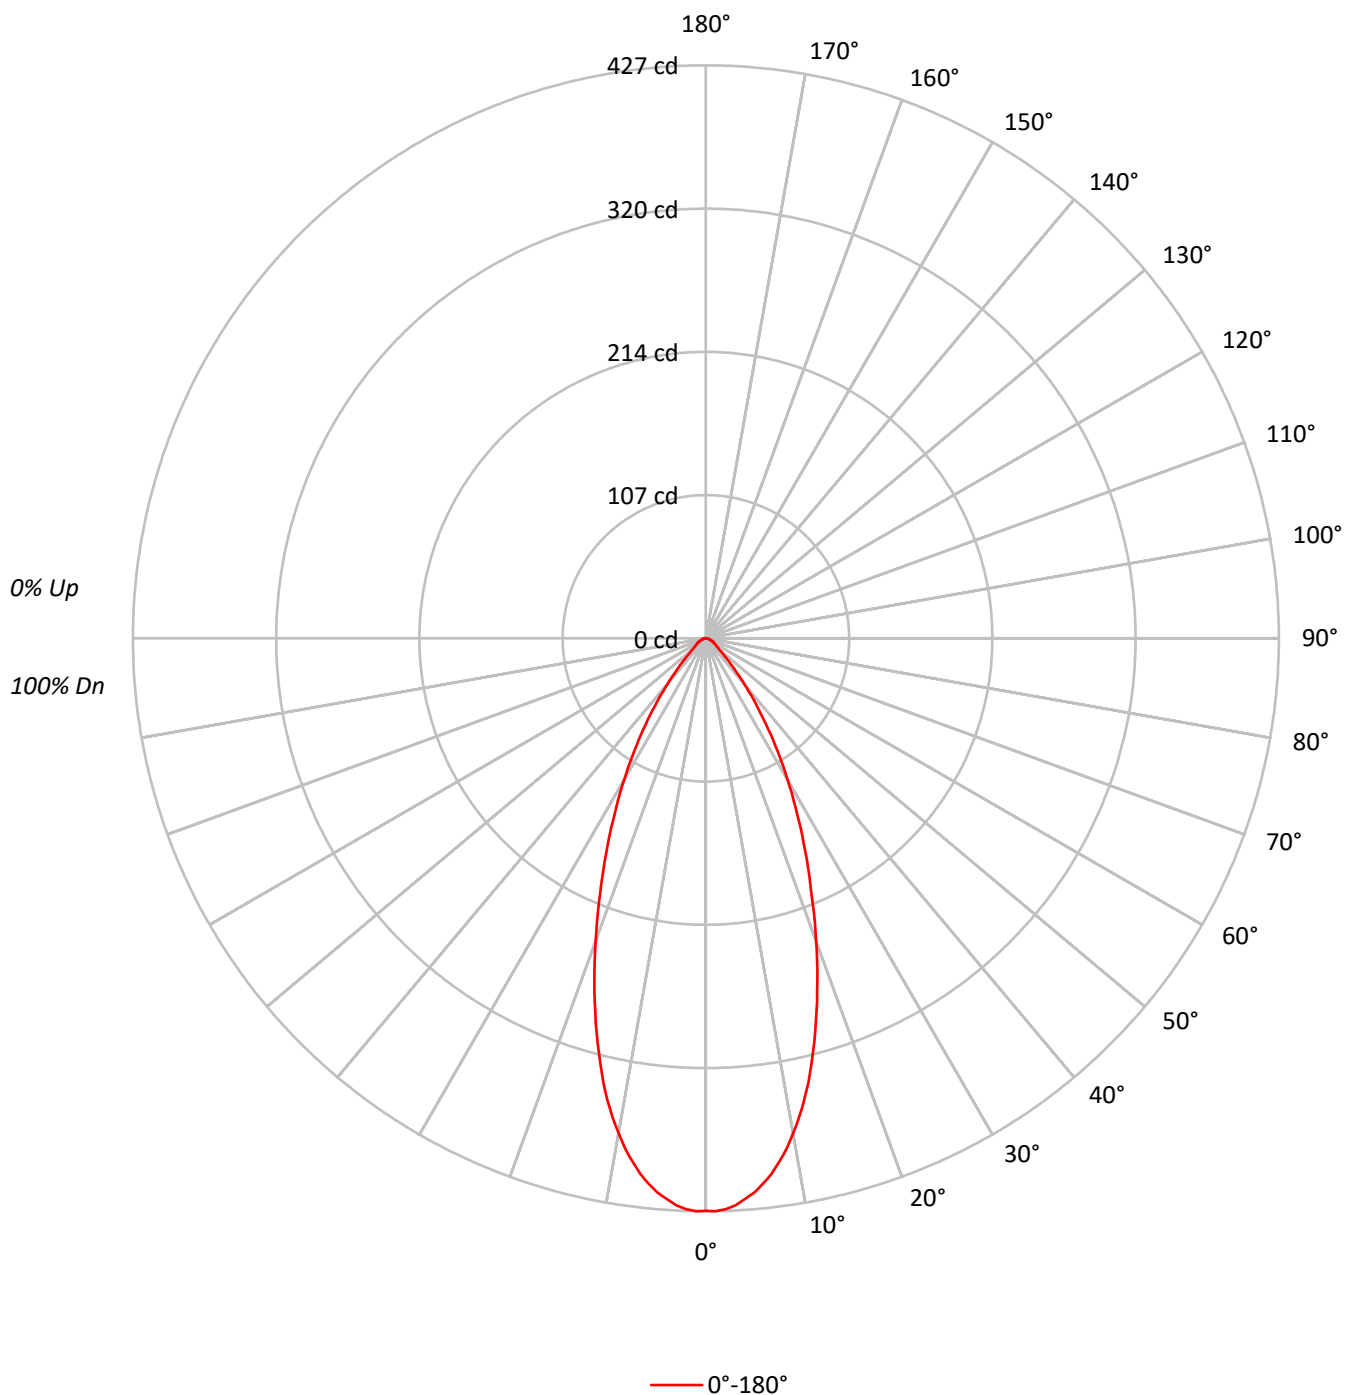

TEST NUMBER: P1264312

CATALOG NUMBER: P3AS05R359730DE010 E3DLP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	94	105	100	97	93	97	94	91		94	92	89		91
3	102	95	90	86	100	94	89	85	91	87	84		89	85	82		86
4	97	89	83	79	95	88	82	78	86	81	77		84	80	77		82
5	92	83	77	73	90	82	77	73	81	76	72		79	75	71		77
6	87	78	72	68	86	77	72	68	76	71	67		75	70	67		73
7	83	74	68	63	82	73	67	63	72	67	63		71	66	63		69
8	79	70	64	60	78	69	63	59	68	63	59		67	62	59		66
9	76	66	60	56	75	66	60	56	65	59	56		64	59	56		63
10	72	63	57	53	71	62	57	53	61	56	53		61	56	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	93545
5°	91239
10°	83410
15°	70806
20°	56052
25°	42390
30°	30866
35°	20880
40°	12824
45°	7350
50°	4435
55°	3594
60°	3158
65°	2802
70°	2308
75°	2288
80°	2273
85°	2264

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 7350 cd/sqm

TEST NUMBER: P1264312

CATALOG NUMBER: P3AS05R359730DE010 E3DLP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	38.3	13.2
10°-20°	86.0	29.5
20°-30°	80.4	27.6
30°-40°	49.2	16.9
40°-50°	19.4	6.7
50°-60°	8.6	2.9
60°-70°	5.3	1.8
70°-80°	2.8	1.0
80°-90°	1.0	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	204.7	70.3
0°-40°	254.0	87.3
0°-60°	281.9	96.9
0°-90°	291.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	291.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	427	
5°	414	38
15°	312	86
25°	175	80
35°	78	49
45°	24	19
55°	9	9
65°	5	5
75°	3	3
85°	1	1
90°	0	

TEST NUMBER: P1264312

CATALOG NUMBER: P3AS05R359730DE010 E3DLP1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	426.6
1°	427.0
2°	425.7
3°	423.0
4°	418.9
5°	414.5
6°	408.6
7°	401.9
8°	393.8
9°	384.9
10°	374.6
11°	363.8
12°	352.2
13°	339.6
14°	325.7
15°	311.9
17.5°	276.0
20°	240.2
22.5°	205.7
25°	175.2
27.5°	147.0
30°	121.9
32.5°	98.6
35°	78.0
37.5°	59.6
40°	44.8
42.5°	32.3
45°	23.7
47.5°	17.0
50°	13.0
52.5°	10.8
55°	9.4
57.5°	8.1
60°	7.2
62.5°	6.3
65°	5.4
67.5°	4.5
70°	3.6
72.5°	3.1
75°	2.7
77.5°	2.2
80°	1.8
82.5°	1.3
85°	0.9
87.5°	0.4



TEST NUMBER: P1264312
CATALOG NUMBER: P3AS05R359730DE010 E3DLP1H

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)