

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1264397

Luminaire Tested: P3AS05R509730DE010 E3DLP1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1264397
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-29)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R509730DE010 E3DLP1GPH
Description: 3in Adjustable LED luminaire with, R50 optic, 3000K CCT AND, 97CRI , E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 162.0 lumens
Efficiency: N/A
Efficacy: 22.5 lumens/watt
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.77
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1264397

CATALOG NUMBER: P3AS05R509730DE010 E3DLP1GPH

Luminous Intensity Polar Plot

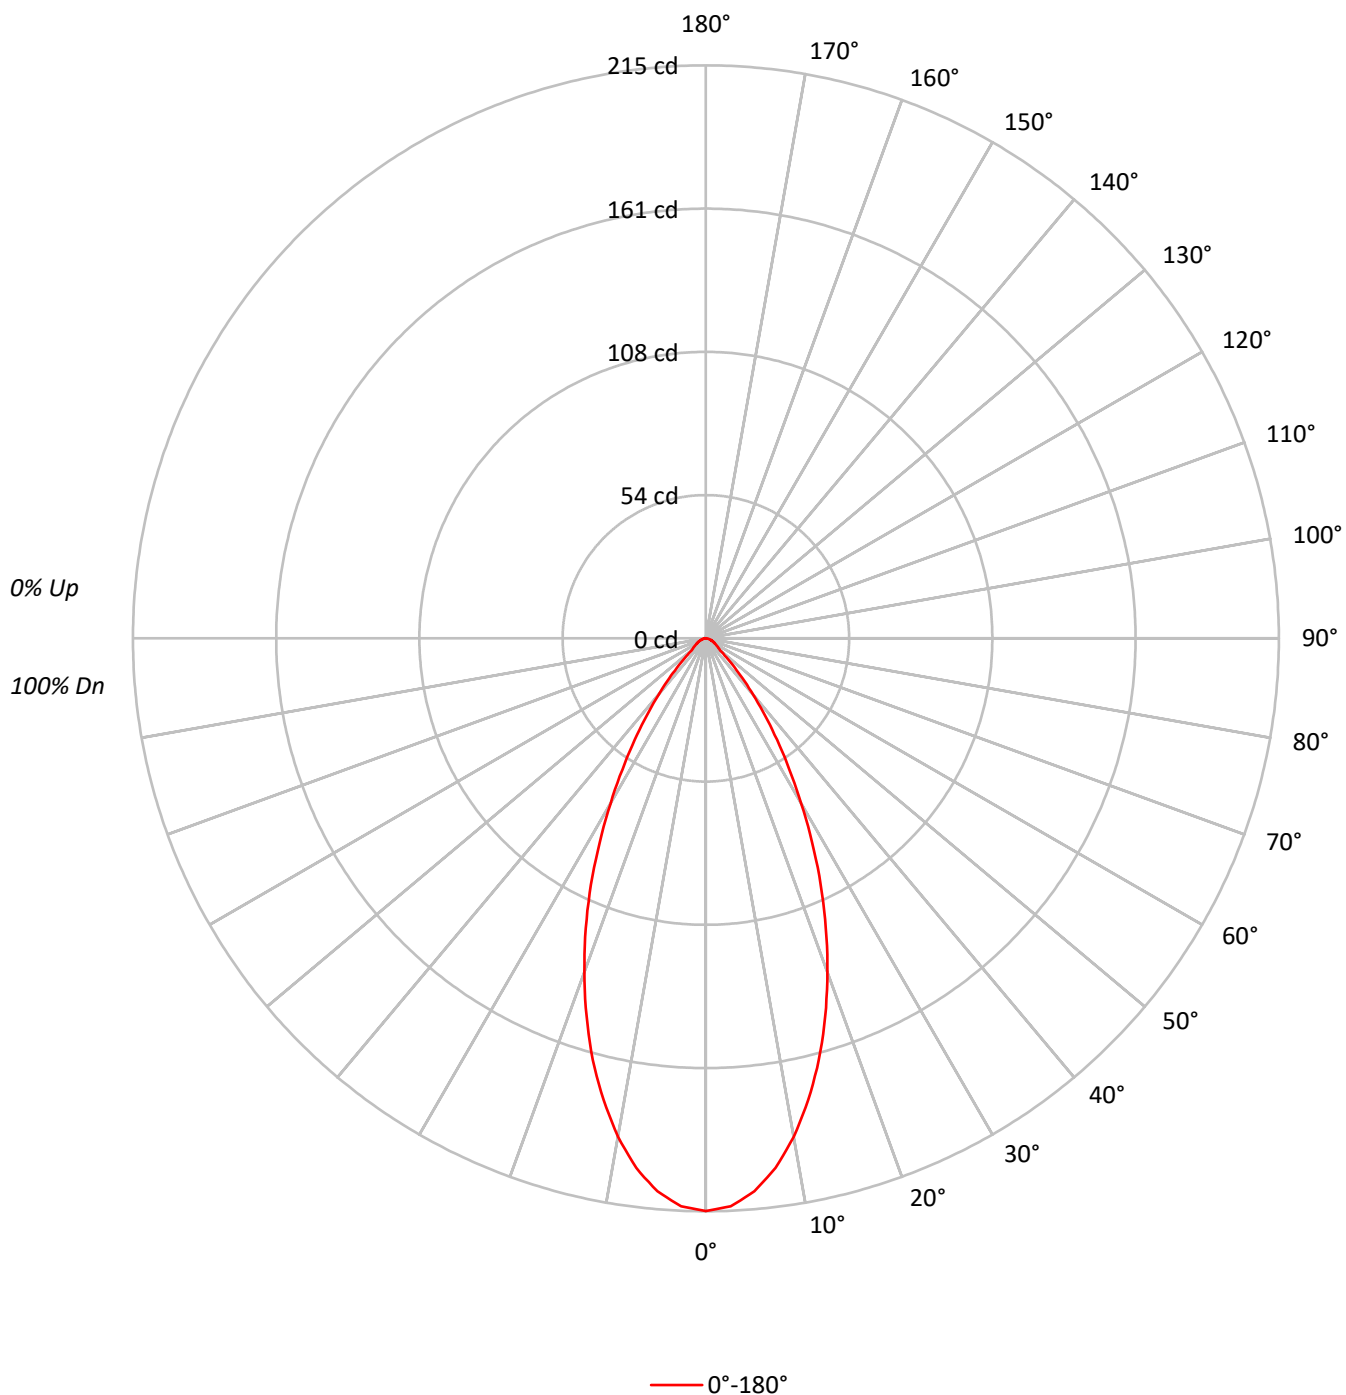

TEST NUMBER: P1264397

CATALOG NUMBER: P3AS05R509730DE010 E3DLP1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	106	103	104	102	100		100	99	97		97
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		91
3	101	95	89	85	99	93	88	85	91	87	83		88	85	82		86
4	96	88	82	78	94	87	82	78	85	80	77		83	79	76		81
5	91	83	76	72	90	82	76	72	80	75	71		78	74	70		77
6	87	77	71	67	85	77	71	67	75	70	66		74	69	66		72
7	82	73	67	62	81	72	66	62	71	66	62		70	65	61		68
8	78	69	63	58	77	68	62	58	67	62	58		66	61	58		65
9	75	65	59	55	74	64	59	55	63	58	55		63	58	54		62
10	71	61	56	52	70	61	55	52	60	55	51		59	55	51		59

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	47123
5°	45851
10°	42284
15°	37185
20°	31106
25°	24679
30°	18104
35°	12448
40°	7901
45°	4435
50°	2388
55°	2026
60°	1710
65°	1608
70°	1410
75°	1271
80°	1137
85°	1006

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4435 cd/sqm

TEST NUMBER: P1264397

CATALOG NUMBER: P3AS05R509730DE010 E3DLP1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	19.3	11.9
10°-20°	45.4	28.0
20°-30°	46.4	28.6
30°-40°	29.4	18.2
40°-50°	11.7	7.2
50°-60°	4.7	2.9
60°-70°	3.0	1.9
70°-80°	1.6	1.0
80°-90°	0.5	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	111.1	68.6
0°-40°	140.5	86.7
0°-60°	156.9	96.9
0°-90°	162.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	162.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	215	
5°	208	19
15°	164	45
25°	102	46
35°	46	29
45°	14	12
55°	5	5
65°	3	3
75°	2	2
85°	0	0
90°	0	

TEST NUMBER: P1264397

CATALOG NUMBER: P3AS05R509730DE010 E3DLP1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	214.9
2.5°	213.3
5°	208.3
7.5°	200.4
10°	189.9
12.5°	177.4
15°	163.8
17.5°	148.9
20°	133.3
22.5°	117.7
25°	102.0
27.5°	86.2
30°	71.5
32.5°	58.3
35°	46.5
37.5°	36.4
40°	27.6
42.5°	20.4
45°	14.3
47.5°	9.6
50°	7.0
52.5°	5.9
55°	5.3
57.5°	4.6
60°	3.9
62.5°	3.5
65°	3.1
67.5°	2.6
70°	2.2
72.5°	1.8
75°	1.5
77.5°	1.1
80°	0.9
82.5°	0.7
85°	0.4
87.5°	0.2
90°	0.0

(END OF REPORT)