

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1264507

Luminaire Tested: P3AS05R709730DE010 E3DLP1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1264507
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-45)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R709730DE010 E3DLP1GPH
Description: 3in Adjustable LED luminaire with, R70 optic, 3000K CCT AND, 97CRI , E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 158.0 lumens
Efficiency: N/A
Efficacy: 21.9 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1264507

CATALOG NUMBER: P3AS05R709730DE010 E3DLP1GPH

Luminous Intensity Polar Plot

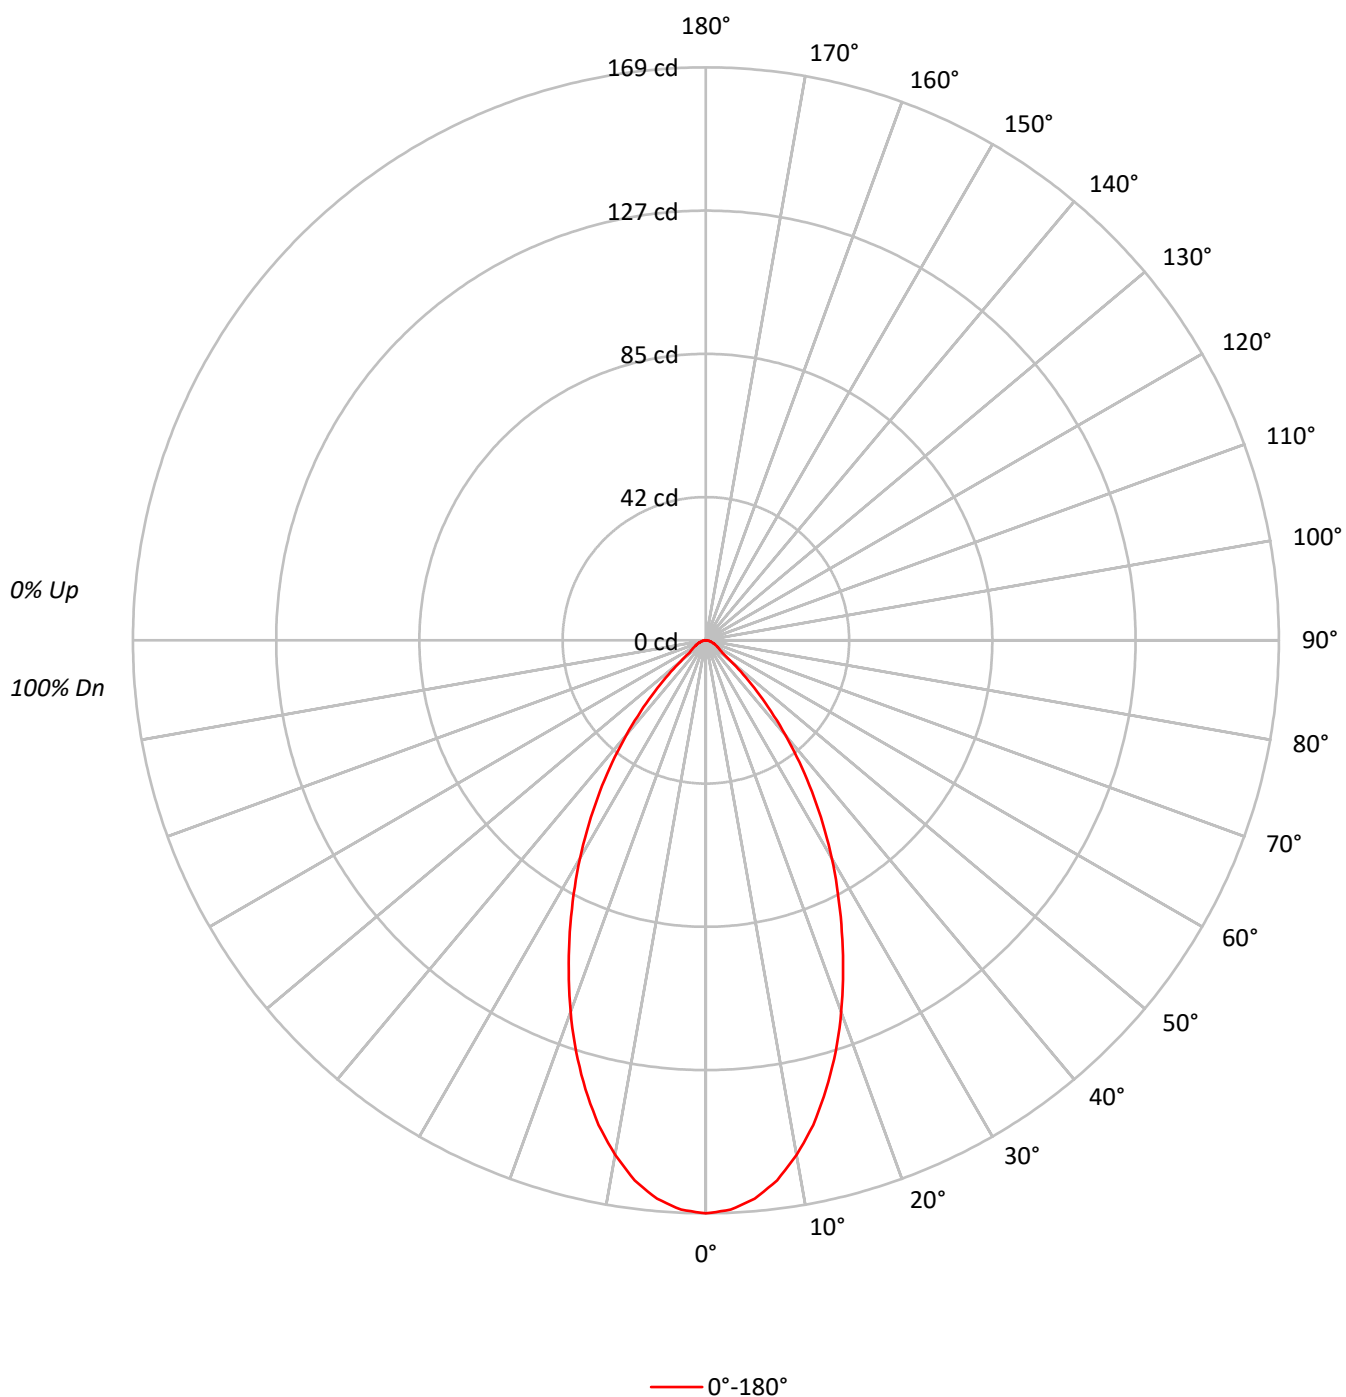

TEST NUMBER: P1264507

CATALOG NUMBER: P3AS05R709730DE010 E3DLP1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	104	110	107	105	103	103	101	100		100	98	97		96
2	106	101	97	93	104	99	95	92	96	93	90		93	90	88		90
3	100	93	88	83	98	92	87	83	89	85	81		87	83	80		84
4	95	86	80	76	93	85	80	75	83	78	74		81	77	73		79
5	89	80	74	69	88	79	73	69	78	72	68		76	71	68		74
6	85	75	68	64	83	74	68	64	73	67	63		71	66	63		70
7	80	70	64	59	79	69	63	59	68	62	58		67	62	58		66
8	76	66	59	55	75	65	59	55	64	58	54		63	58	54		62
9	72	62	55	51	71	61	55	51	60	55	51		59	54	51		58
10	69	58	52	48	67	58	52	48	57	51	48		56	51	48		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	37058
5°	36386
10°	34312
15°	31124
20°	27232
25°	22961
30°	18813
35°	14589
40°	10448
45°	6605
50°	3309
55°	2026
60°	1754
65°	1608
70°	1410
75°	1271
80°	1137
85°	1006

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 6605 cd/sqm

TEST NUMBER: P1264507

CATALOG NUMBER: P3AS05R709730DE010 E3DLP1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	15.4	9.8
10°-20°	38.2	24.2
20°-30°	43.5	27.5
30°-40°	34.0	21.5
40°-50°	16.7	10.6
50°-60°	5.2	3.3
60°-70°	3.0	1.9
70°-80°	1.6	1.0
80°-90°	0.5	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	97.0	61.4
0°-40°	131.0	82.9
0°-60°	152.9	96.7
0°-90°	158.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	158.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	169	
5°	165	15
15°	137	38
25°	95	43
35°	54	34
45°	21	17
55°	5	5
65°	3	3
75°	2	2
85°	0	0
90°	0	

TEST NUMBER: P1264507

CATALOG NUMBER: P3AS05R709730DE010 E3DLP1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	169.0
2.5°	168.1
5°	165.3
7.5°	160.7
10°	154.1
12.5°	146.4
15°	137.1
17.5°	127.3
20°	116.7
22.5°	105.7
25°	94.9
27.5°	84.4
30°	74.3
32.5°	64.2
35°	54.5
37.5°	45.3
40°	36.5
42.5°	28.4
45°	21.3
47.5°	14.9
50°	9.7
52.5°	6.4
55°	5.3
57.5°	4.6
60°	4.0
62.5°	3.5
65°	3.1
67.5°	2.6
70°	2.2
72.5°	1.8
75°	1.5
77.5°	1.3
80°	0.9
82.5°	0.7
85°	0.4
87.5°	0.2
90°	0.0

(END OF REPORT)