

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1264601

Luminaire Tested: P3AS09R209730DE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1264601
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-6)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R209730DE010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R20 optic, 3000K CCT AND, 97CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 517.0 lumens
Efficiency: N/A
Efficacy: 46.6 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1264601

CATALOG NUMBER: P3AS09R209730DE010 E3DLD1WMH

Luminous Intensity Polar Plot

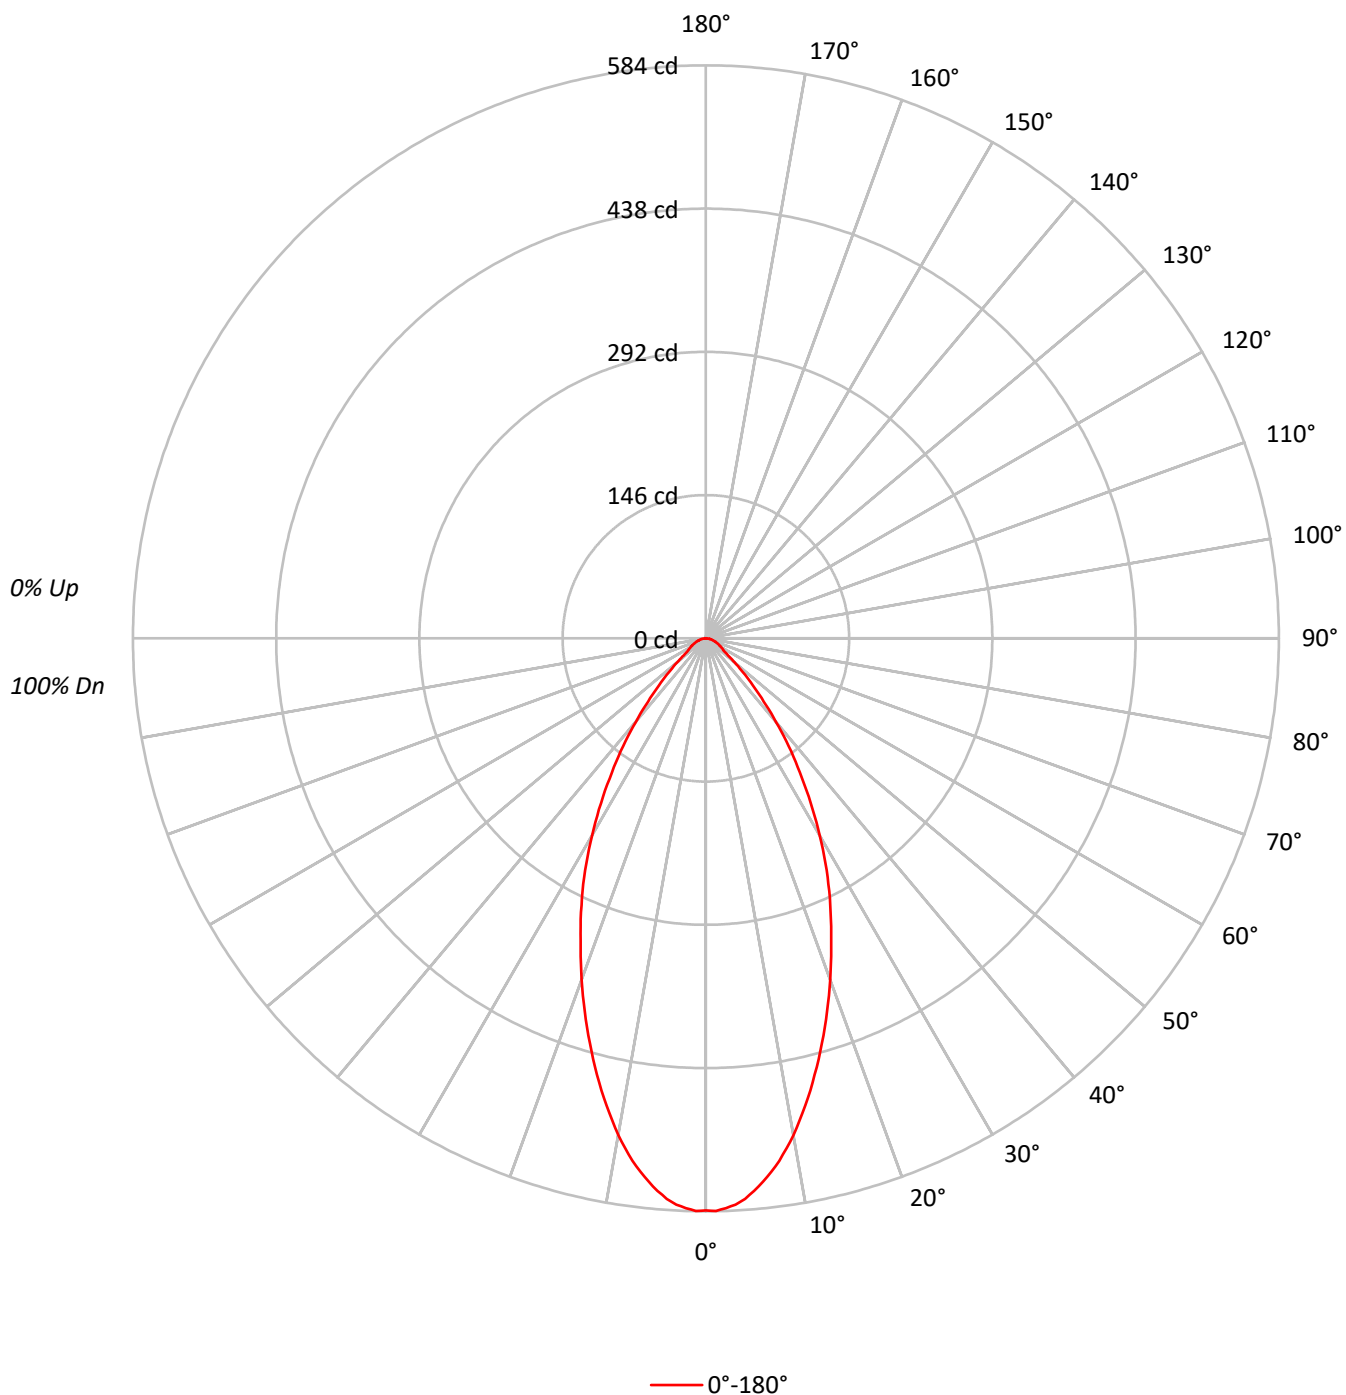

TEST NUMBER: P1264601

CATALOG NUMBER: P3AS09R209730DE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	109	106	104	110	107	105	102	103	101	99	99	98	96	96	95	93	91		
2	106	100	96	92	104	99	94	91	95	92	89	92	89	87	90	87	85	83		
3	100	93	87	82	98	91	86	82	88	84	80	86	82	79	84	81	78	76		
4	94	86	79	75	92	85	79	74	82	77	73	80	76	72	78	75	72	70		
5	89	80	73	68	87	79	73	68	77	71	67	75	70	67	73	69	66	65		
6	84	74	68	63	82	73	67	63	72	66	62	70	65	62	69	65	61	60		
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	60	57	55		
8	75	65	59	54	74	64	58	54	63	58	54	62	57	53	61	57	53	52		
9	72	61	55	50	70	61	55	50	60	54	50	59	54	50	58	53	50	48		
10	68	58	51	47	67	57	51	47	56	51	47	56	51	47	55	50	47	45		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	127884
5°	124455
10°	114494
15°	100795
20°	86434
25°	72609
30°	58693
35°	44651
40°	31774
45°	20963
50°	12997
55°	8525
60°	7763
65°	7160
70°	6732
75°	6100
80°	5809
85°	5032

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 20963 cd/sqm

TEST NUMBER: P1264601

CATALOG NUMBER: P3AS09R209730DE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	52.3	10.1
10°-20°	123.6	23.9
20°-30°	137.2	26.5
30°-40°	104.7	20.2
40°-50°	53.6	10.4
50°-60°	22.0	4.3
60°-70°	13.7	2.7
70°-80°	7.7	1.5
80°-90°	2.3	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	313.1	60.6
0°-40°	417.7	80.8
0°-60°	493.3	95.4
0°-90°	517.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	517.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	583	
5°	565	52
15°	444	124
25°	300	137
35°	167	105
45°	68	54
55°	22	22
65°	14	14
75°	7	8
85°	2	2
90°	0	

TEST NUMBER: P1264601

CATALOG NUMBER: P3AS09R209730DE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	583.2
1°	583.8
2°	581.2
3°	577.9
4°	572.7
5°	565.4
6°	556.9
7°	547.7
8°	537.9
9°	526.0
10°	514.2
12.5°	480.1
15°	444.0
17.5°	407.2
20°	370.4
22.5°	333.6
25°	300.1
27.5°	266.6
30°	231.8
32.5°	199.0
35°	166.8
37.5°	138.6
40°	111.0
42.5°	87.3
45°	67.6
47.5°	51.2
50°	38.1
52.5°	28.2
55°	22.3
57.5°	20.4
60°	17.7
62.5°	15.8
65°	13.8
67.5°	11.8
70°	10.5
72.5°	8.5
75°	7.2
77.5°	5.9
80°	4.6
82.5°	3.3
85°	2.0
87.5°	0.7
90°	0.0

(END OF REPORT)