

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1264606

Luminaire Tested: P3AS09R259730DE010 E3CB1MB

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1264606
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R259730DE010 E3CB1MB
Description: 3in Adjustable LED luminaire with, R25 optic, 3000K CCT AND, 97CRI , E3CB1MB TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 835.1 lumens
Efficiency: N/A
Efficacy: 75.2 lumens/watt
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.41
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1264606
CATALOG NUMBER: P3AS09R259730DE010 E3CB1MB

Luminous Intensity Polar Plot

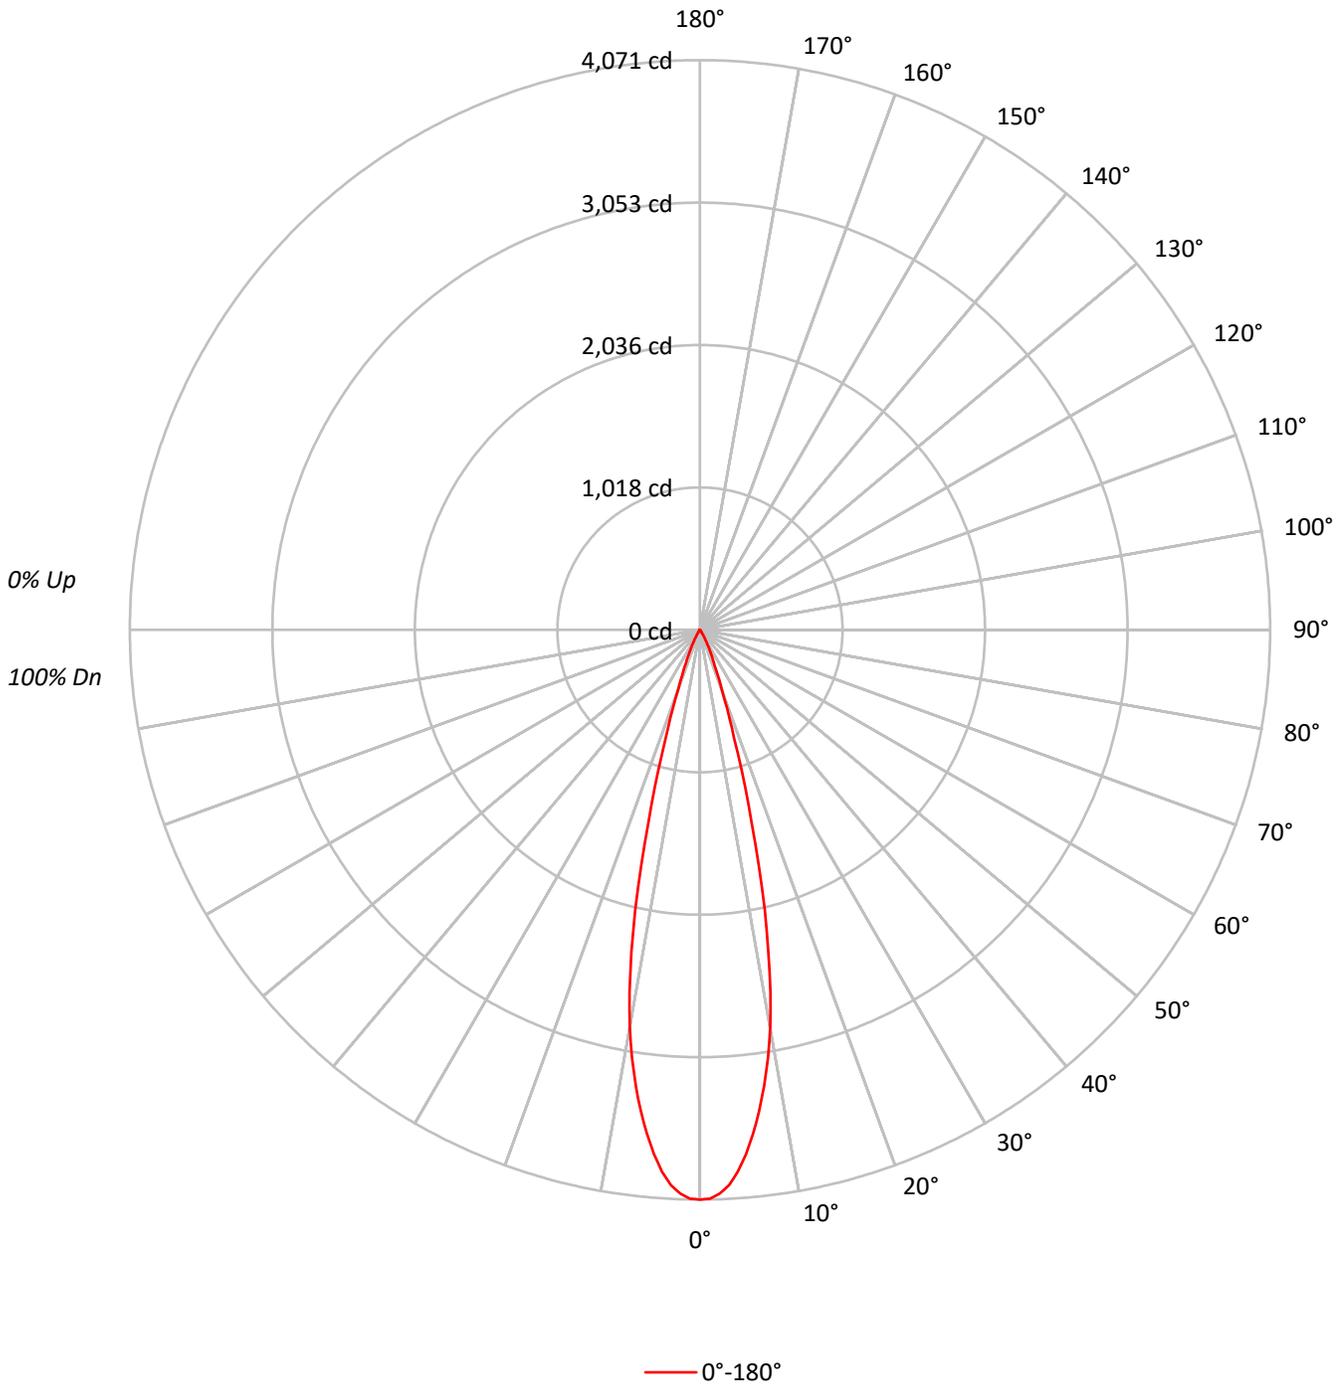



TEST NUMBER: P1264606
 CATALOG NUMBER: P3AS09R259730DE010 E3CB1MB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	99	100
1	115	113	111	110	113	111	109	108	107	106	105	103	103	102	100	99	99	97	97	97	97
2	112	108	105	103	110	107	104	102	104	102	100	101	99	98	98	97	96	96	96	96	94
3	108	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92	92	92	92
4	105	100	97	94	104	99	96	93	97	95	92	96	93	91	94	92	90	89	89	89	89
5	103	97	93	90	101	96	93	90	95	92	89	93	91	89	92	90	88	87	87	87	87
6	100	94	90	87	99	93	90	87	92	89	87	91	88	86	90	87	86	85	85	85	85
7	97	91	88	85	96	91	87	85	90	87	84	89	86	84	88	85	83	83	83	83	83
8	95	89	85	83	94	89	85	82	88	84	82	87	84	82	86	83	81	81	81	81	81
9	93	87	83	80	92	86	83	80	86	82	80	85	82	80	84	82	80	79	79	79	79
10	91	85	81	78	90	84	81	78	84	80	78	83	80	78	82	80	78	77	77	77	77

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	892735
5°	827997
10°	642117
15°	321977
20°	105779
25°	42051
30°	15775
35°	4578
40°	2061
45°	806
50°	682
55°	497
60°	570
65°	675
70°	449
75°	593
80°	884
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 80°
 Luminance: 884 cd/sqm



TEST NUMBER: P1264606
 CATALOG NUMBER: P3AS09R259730DE010 E3CB1MB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	330.9	39.6
10°-20°	394.7	47.3
20°-30°	89.0	10.7
30°-40°	14.4	1.7
40°-50°	2.6	0.3
50°-60°	1.4	0.2
60°-70°	1.2	0.1
70°-80°	0.7	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	814.6	97.5
0°-40°	829.0	99.3
0°-60°	833.0	99.8
0°-90°	835.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	835.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4071	
5°	3762	331
15°	1418	395
25°	174	89
35°	17	14
45°	3	3
55°	1	1
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1264606
CATALOG NUMBER: P3AS09R259730DE010 E3CB1MB

CANDELA DISTRIBUTION (FULL):

0°	
0°	4071.2
1°	4064.6
2°	4031.8
3°	3971.5
4°	3880.3
5°	3761.6
6°	3619.9
7°	3466.4
8°	3290.5
9°	3098.3
10°	2883.8
11°	2636.5
12°	2351.8
13°	2054.0
14°	1734.5
15°	1418.3
17.5°	808.2
20°	453.3
22.5°	273.6
25°	173.8
27.5°	106.9
30°	62.3
32.5°	32.8
35°	17.1
37.5°	11.2
40°	7.2
42.5°	4.6
45°	2.6
47.5°	2.0
50°	2.0
52.5°	2.0
55°	1.3
57.5°	1.3
60°	1.3
62.5°	1.3
65°	1.3
67.5°	1.3
70°	0.7
72.5°	0.7
75°	0.7
77.5°	0.7
80°	0.7
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1264606
CATALOG NUMBER: P3AS09R259730DE010 E3CB1MB

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)